




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**934037**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA 15W40 (--- GAL)**

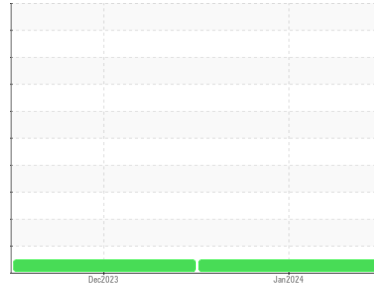

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108318</b>	GFL0098210	---
Sample Date	Client Info		<b>16 Jan 2024</b>	30 Dec 2023	---
Machine Age	hrs	Client Info	<b>344</b>	250	---
Oil Age	hrs	Client Info	<b>344</b>	250	---
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>60</b>	46	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	<1	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	5	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>17</b>	16	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>10</b>	14	---
Barium	ppm	ASTM D5185m		<b>4</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>56</b>	49	---
Manganese	ppm	ASTM D5185m		<b>17</b>	15	---
Magnesium	ppm	ASTM D5185m		<b>850</b>	730	---
Calcium	ppm	ASTM D5185m		<b>1126</b>	1001	---
Phosphorus	ppm	ASTM D5185m		<b>790</b>	717	---
Zinc	ppm	ASTM D5185m		<b>1008</b>	854	---
Sulfur	ppm	ASTM D5185m		<b>2592</b>	2153	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>39</b>	33	---
Sodium	ppm	ASTM D5185m		<b>6</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>30</b>	15	---
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	---

## INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0</b>	0	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.2</b>	10.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	20.3	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.4</b>	18.7	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.0</b>	5.6	---







# OIL ANALYSIS REPORT

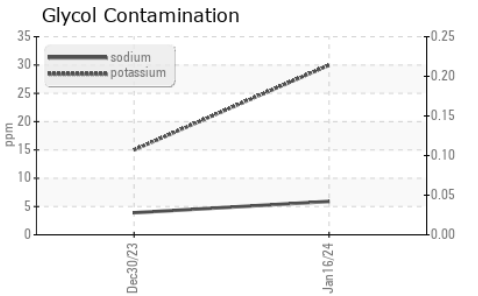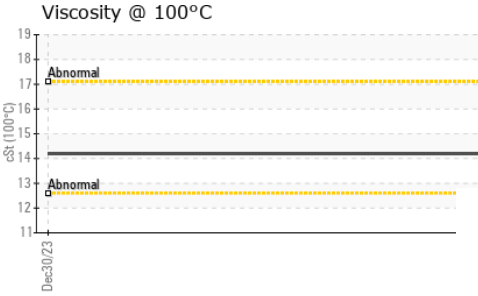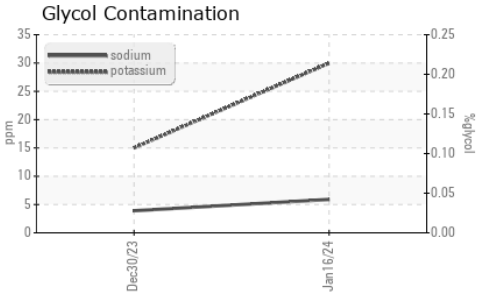

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.2</b>	14.2	---

## GRAPHS

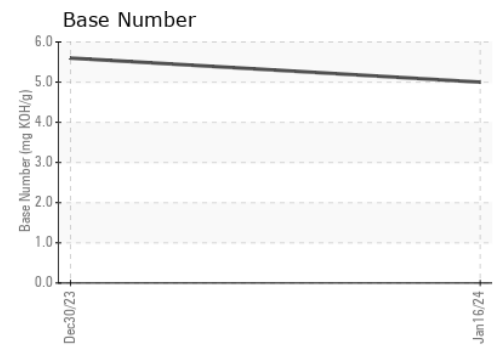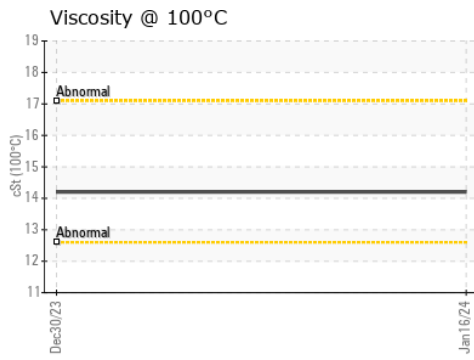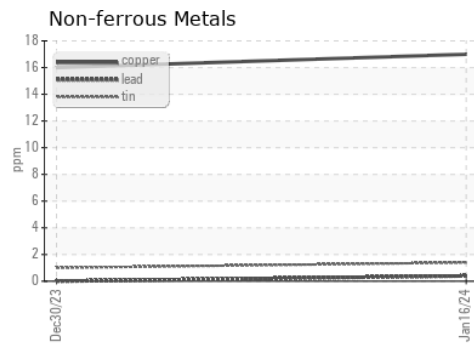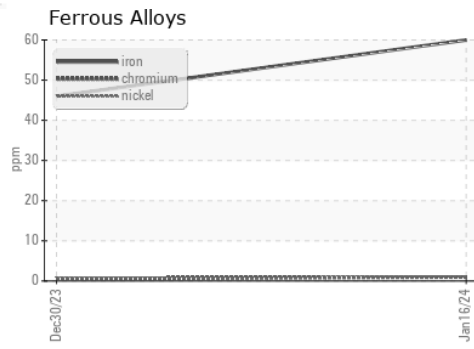

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108318 **Received** : 19 Jan 2024  
**Lab Number** : **06065392** **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10836774 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)