




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

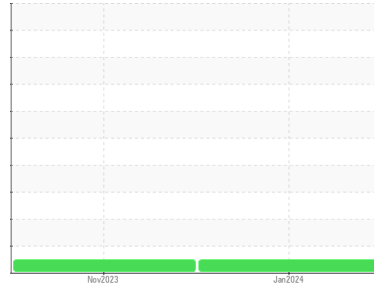

Machine Id  
**825058**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0108320</b>	GFL0098241	---
Sample Date	Client Info			<b>17 Jan 2024</b>	02 Nov 2023	---
Machine Age	hrs	Client Info		<b>2115</b>	2109	---
Oil Age	hrs	Client Info		<b>2115</b>	2109	---
Oil Changed	Client Info			<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>4</b>	1	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	1	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>9</b>	12	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>62</b>	59	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>1069</b>	941	---
Calcium	ppm	ASTM D5185m		<b>1140</b>	1064	---
Phosphorus	ppm	ASTM D5185m		<b>1163</b>	1041	---
Zinc	ppm	ASTM D5185m		<b>1393</b>	1306	---
Sulfur	ppm	ASTM D5185m		<b>3593</b>	3363	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	3	---
Sodium	ppm	ASTM D5185m		<b>1</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.0</b>	19.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.2</b>	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.4</b>	8.6	---







# OIL ANALYSIS REPORT

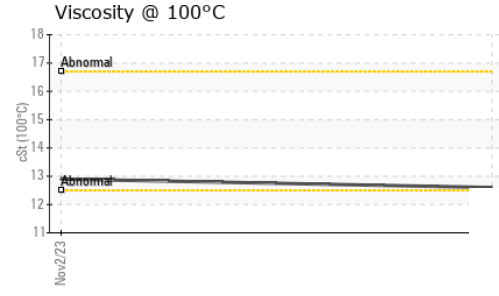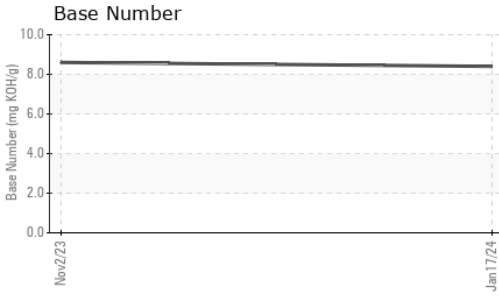

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>12.6</b>	12.9	---

## GRAPHS

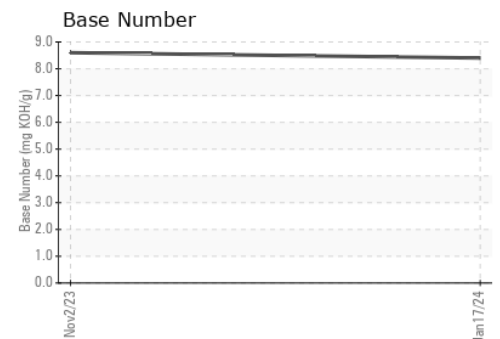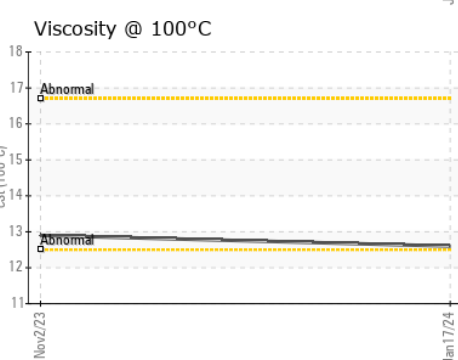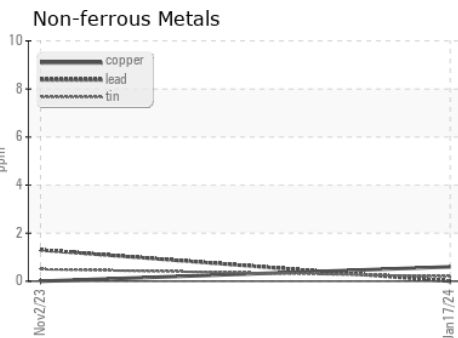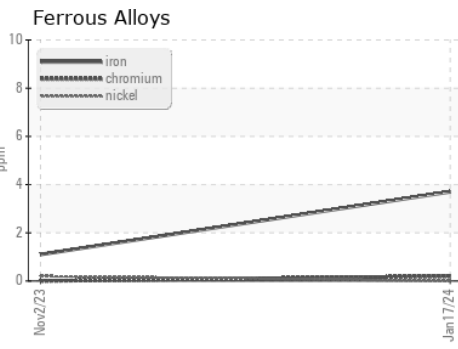

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108320 **Recieved** : 19 Jan 2024  
**Lab Number** : 06065397 **Diagnosed** : 22 Jan 2024  
**Unique Number** : 10836779 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)