




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

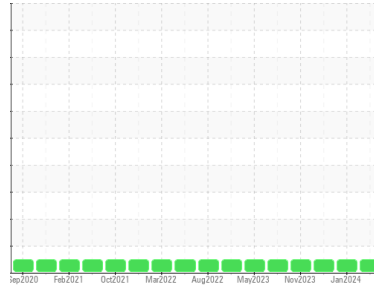

Machine Id  
**829022-1073**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108325</b>	GFL0098240	GFL0098182
Sample Date	Client Info		<b>18 Jan 2024</b>	05 Jan 2024	22 Nov 2023
Machine Age	hrs	Client Info	<b>13989</b>	13887	13576
Oil Age	hrs	Client Info	<b>5104</b>	5313	5153
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>24</b>	22	12
Chromium	ppm	ASTM D5185m >4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	2	<1
Lead	ppm	ASTM D5185m >45	<b>1</b>	1	<1
Copper	ppm	ASTM D5185m >85	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>11</b>	11	14
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>71</b>	58	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	0
Magnesium	ppm	ASTM D5185m 1010	<b>1039</b>	924	929
Calcium	ppm	ASTM D5185m 1070	<b>1240</b>	1164	1185
Phosphorus	ppm	ASTM D5185m 1150	<b>1132</b>	1050	1076
Zinc	ppm	ASTM D5185m 1270	<b>1411</b>	1244	1277
Sulfur	ppm	ASTM D5185m 2060	<b>3447</b>	2958	3210

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>6</b>	9	4
Sodium	ppm	ASTM D5185m	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>4</b>	3	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.9</b>	0.7	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	8.9	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.7</b>	20.1	18.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.8</b>	15.9	13.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	7.7	8.5







# OIL ANALYSIS REPORT

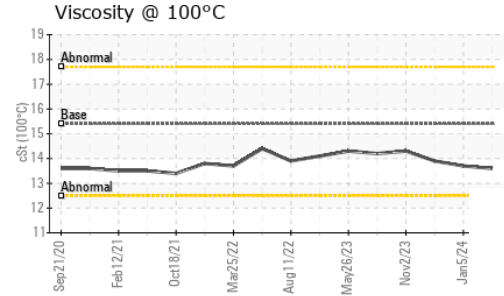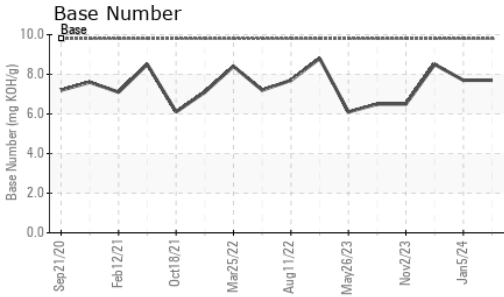

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.7	13.9

## GRAPHS

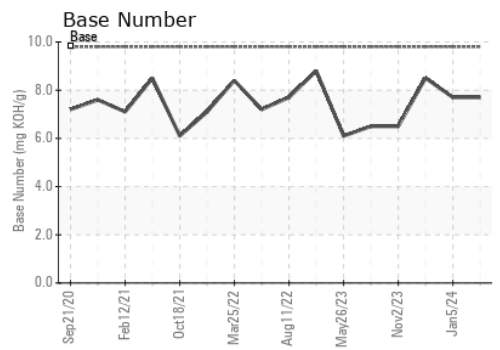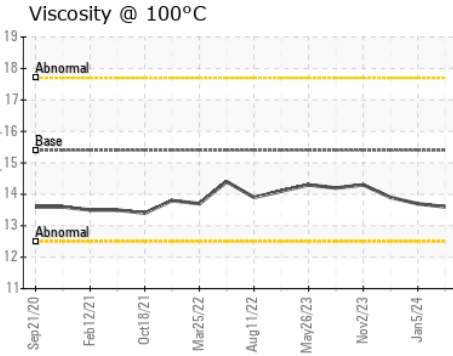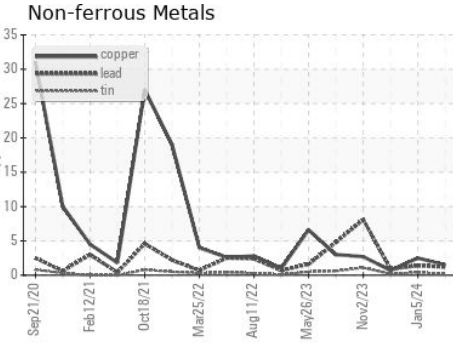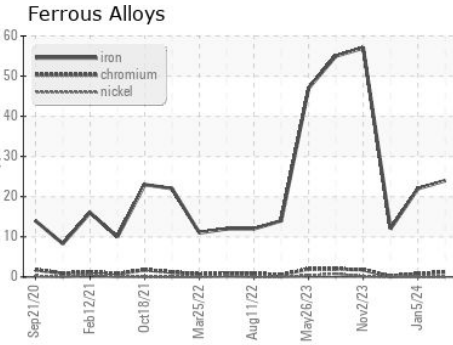

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108325 **Received** : 19 Jan 2024  
**Lab Number** : 06065399 **Diagnosed** : 22 Jan 2024  
**Unique Number** : 10836781 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmi@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)