




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
(GFD986)
Machine Id
934029
Component
Natural Gas Engine
Fluid
{not provided} (21 QTS)

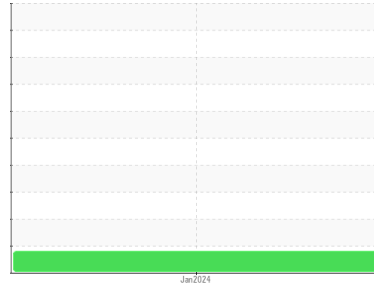

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0074644	---	---
Sample Date	Client Info	17 Jan 2024	---	---
Machine Age	hrs	Client Info	1187	---
Oil Age	hrs	Client Info	1187	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	▲ 76	---
Chromium	ppm	ASTM D5185m	>4	2	---
Nickel	ppm	ASTM D5185m	>2	2	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>9	19	---
Lead	ppm	ASTM D5185m	>30	2	---
Copper	ppm	ASTM D5185m	>35	18	---
Tin	ppm	ASTM D5185m	>4	3	---
Vanadium	ppm	ASTM D5185m		<1	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		4	---
Barium	ppm	ASTM D5185m		4	---
Molybdenum	ppm	ASTM D5185m		62	---
Manganese	ppm	ASTM D5185m		13	---
Magnesium	ppm	ASTM D5185m		853	---
Calcium	ppm	ASTM D5185m		1144	---
Phosphorus	ppm	ASTM D5185m		807	---
Zinc	ppm	ASTM D5185m		1013	---
Sulfur	ppm	ASTM D5185m		2207	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>+100	28	---
Sodium	ppm	ASTM D5185m		6	---
Potassium	ppm	ASTM D5185m	>20	48	---
Fuel	%	ASTM D3524	>4.0	0.0	---

INFRA-RED






method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0	---
Nitration	Abs/cm	*ASTM D7624	>20	12.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		2.8	---







OIL ANALYSIS REPORT

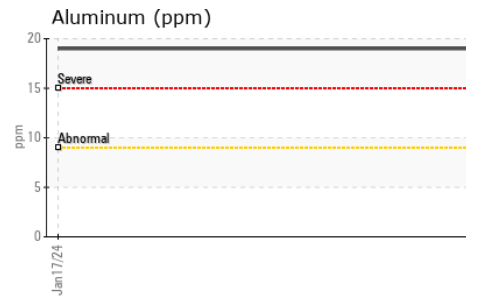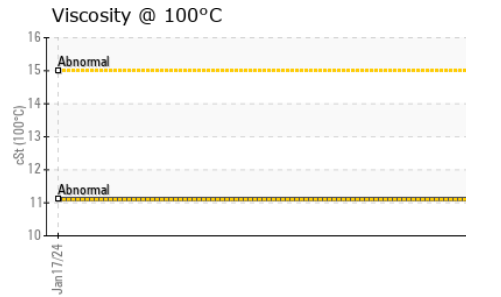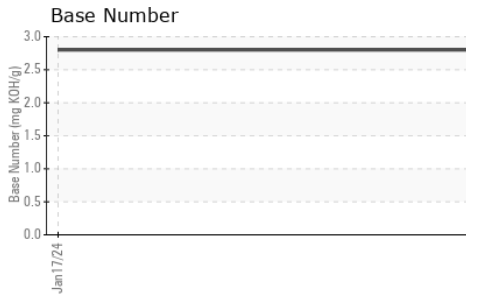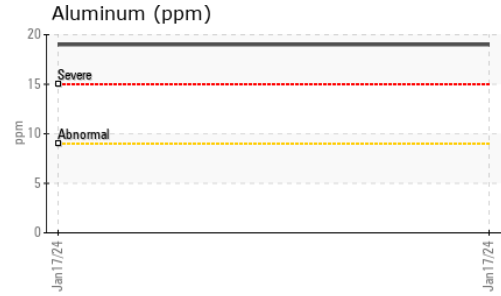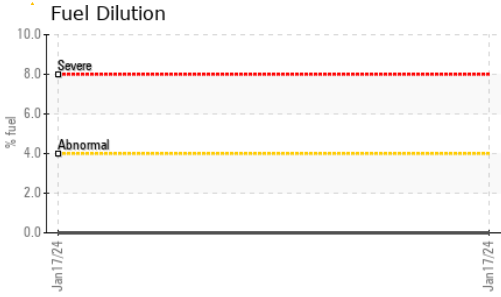

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.1	---	---

GRAPHS

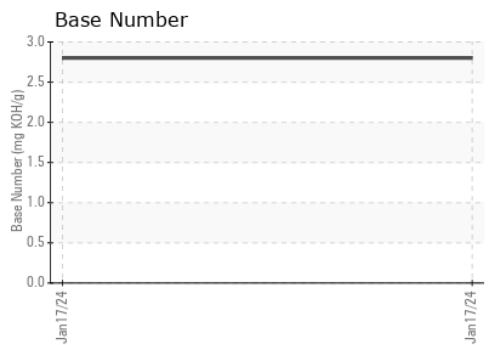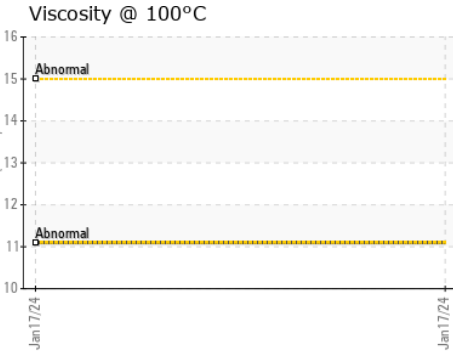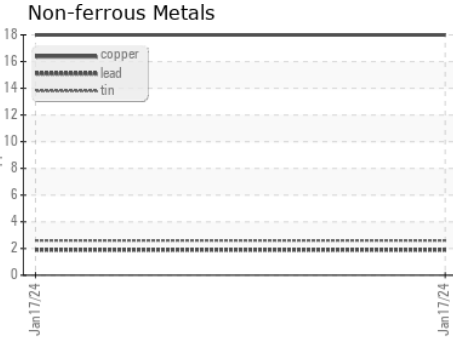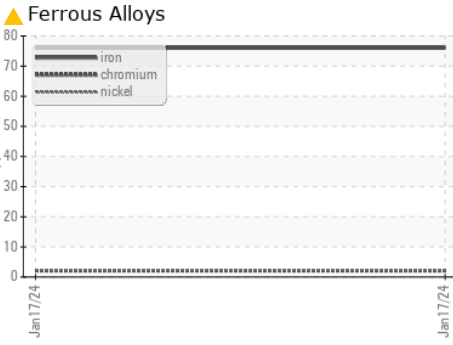

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0074644 **Recieved** : 19 Jan 2024
Lab Number : 06065456 **Diagnosed** : 24 Jan 2024
Unique Number : 10836838 **Diagnostician** : Doug Bogart
Test Package : FLEET (Additional Tests: FUELDILUTION, PercentFuel)

GFL Environmental - 095 - Atlanta West
 2699 Cochran Industrial Blvd
 Douglasville, GA
 US 30127-1332
 Contact: Darrell Welch
 darrell.welch@gflenv.com
 T: (800)207-6618
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)