




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
MONTGOMERY
 Machine Id
MACK 928112
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

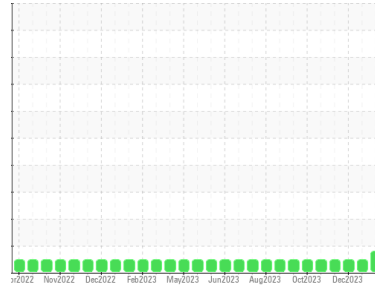

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0081876 | GFL0108529 | GFL0091306 |
| Sample Date | Client Info | | 17 Jan 2024 | 10 Jan 2024 | 28 Dec 2023 |
| Machine Age | hrs | Client Info | 14130 | 0 | 13453 |
| Oil Age | hrs | Client Info | 1198 | 0 | 13453 |
| Oil Changed | Client Info | | Not Chngd | N/A | Not Chngd |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >120 | 16 | 3 | 7 |
| Chromium | ppm | ASTM D5185m >20 | 1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m >5 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m >2 | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | ▲ 23 | 3 | 15 |
| Lead | ppm | ASTM D5185m >40 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m >330 | 1 | 0 | <1 |
| Tin | ppm | ASTM D5185m >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 3 | 12 | 3 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 60 | 63 | 54 | 61 |
| Manganese | ppm | ASTM D5185m 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m 1010 | 986 | 903 | 958 |
| Calcium | ppm | ASTM D5185m 1070 | 1059 | 1020 | 1083 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1026 | 1086 | 965 |
| Zinc | ppm | ASTM D5185m 1270 | 1249 | 1224 | 1286 |
| Sulfur | ppm | ASTM D5185m 2060 | 2990 | 3119 | 3005 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 7 | 7 | 5 |
| Sodium | ppm | ASTM D5185m | 7 | 2 | 4 |
| Potassium | ppm | ASTM D5185m >20 | 18 | 2 | 12 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >4 | 0.4 | 0.1 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 8.2 | 5.8 | 6.9 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 18.8 | 17.5 | 17.9 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 14.7 | 13.3 | 14.1 |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | 6.9 | 8.8 | 7.7 |




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

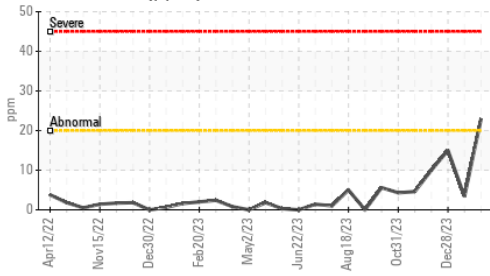

Base Number

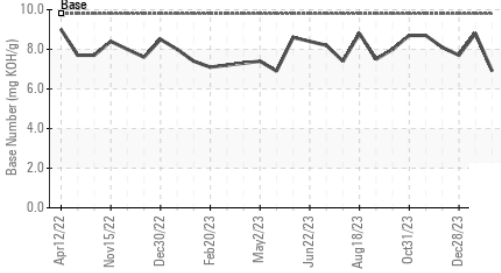

Viscosity @ 100°C

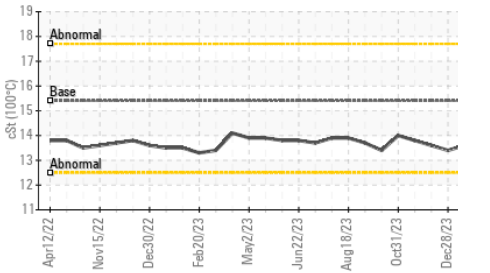


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 12.8 | 13.6 |

GRAPHS


Ferrous Alloys

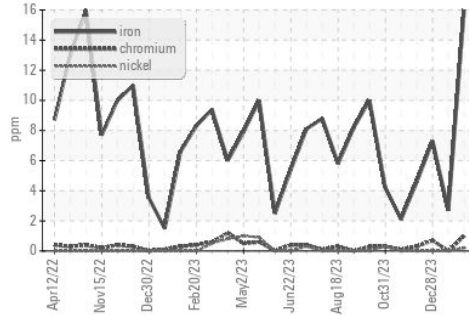


Non-ferrous Metals

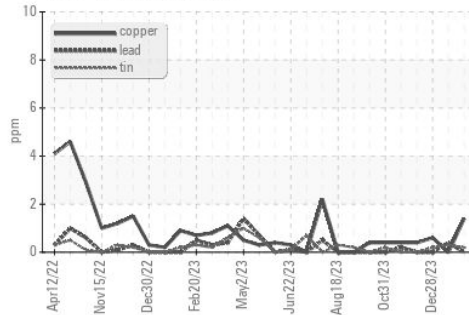

Viscosity @ 100°C

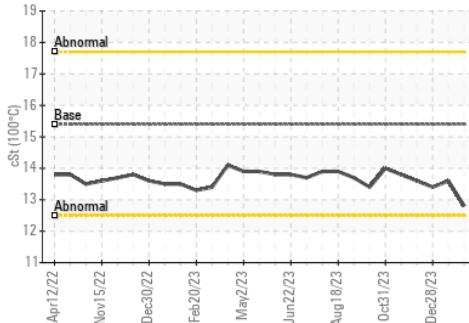

Base Number

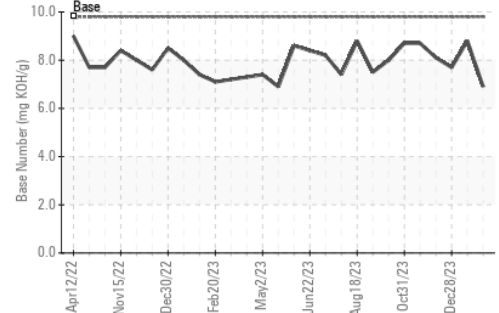

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0081876 **Received** : 19 Jan 2024
Lab Number : 06065458 **Diagnosed** : 22 Jan 2024
Unique Number : 10836840 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 955 - Montgomery
 1121 Wilbanks St
 Montgomery, AL
 US 36108
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: