


# **OIL ANALYSIS REPORT**

# **GRIND ROOM [98725350]**

KR-GR-003070 - DUMPER 1A - NORTH (S/N GRIND A - 11513011)

**Hydraulic System** 

AW HYDRAULIC OIL ISO 68 (--- GAL)





### **DIAGNOSIS**

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. ( Customer Sample Comment: 98725350)

## Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		32020 Feb 20	21 Aug2021 Jan2022	Jun2022 Nov2022 May2023 (	0et2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0114834	PCA0113105	PCA0110821
Sample Date		Client Info		11 Jan 2024	20 Dec 2023	29 Nov 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATI	ON	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	2	2
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	2	2	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	25	0	0	0
Calcium	ppm	ASTM D5185m	200	3	0	2
Phosphorus	ppm	ASTM D5185m	300	248	179	213
Zinc	ppm	ASTM D5185m	370	<1	0	0
Sulfur	ppm	ASTM D5185m	2500	430	239	460
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	<1	<1
Sodium	ppm	ASTM D5185m		0	4	0
Potassium	ppm	ASTM D5185m	>20	0	1	0
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>	<b>▲</b> 101289	<b>93010</b>
Particles >6µm		ASTM D7647	>2500	<b>14095</b>	<b>△</b> 4514	<b>△</b> 13326
Particles >14µm		ASTM D7647	>640	195	47	165
Particles >21µm		ASTM D7647	>160	41	10	39
Particles >38µm		ASTM D7647	>40	3	1	2
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/16	<u>A</u> 24/21/15	<u>4</u> 24/19/13	<u>4</u> 24/21/15
FLUID DEGRAD	ΛΤΙΩΝ	` '	limit/base		history1	history2
TEOID DEGRAL	ATION	method	mini/base	current	HISTORYT	0.00

Acid Number (AN)


mg KOH/g ASTM D8045 0.57

0.38

0.38



# **OIL ANALYSIS REPORT**

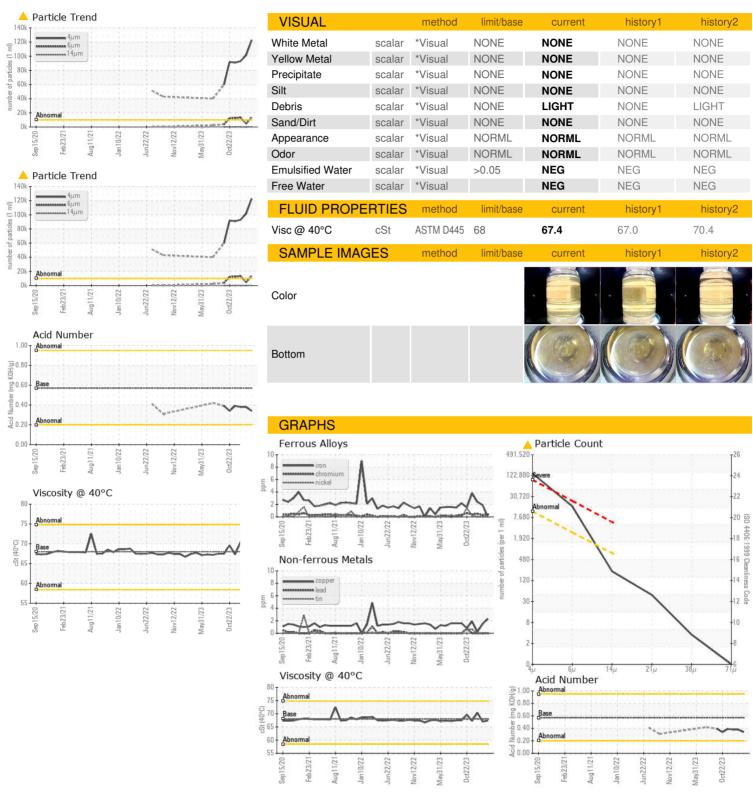





Laboratory Sample No.

Lab Number **Unique Number** 

: 06065566 : 10836948 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0114834

Recieved Diagnosed Diagnostician

: 23 Jan 2024 : Angela Borella

: 19 Jan 2024

Contact: WALLACE WARD wallace.ward@kraftheinzcompany.com T: (660)627-1031

KraftHeinz - Kirksville - Plant 8333 PCA

2504 INDUSTRIAL DR

KIRKSVILLE, MO

F: (660)627-5887

US 63501

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)