


Area  
**GRIND ROOM**  
 Machine Id  
**KR-GR-003074 - DUMPER 1C - REWORK (S/N GRIND A - 11555366)**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (10 GAL)**

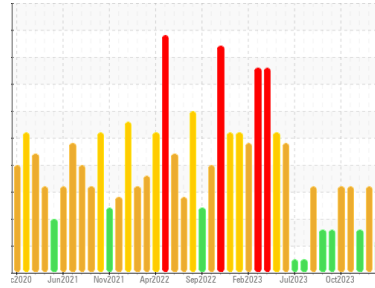

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. ( Customer Sample Comment: Quick Connect Install )

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0115877</b>	PCA0113111	PCA0110824
Sample Date	Client Info	<b>11 Jan 2024</b>	20 Dec 2023	29 Nov 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	Not Changd	N/A
Sample Status		<b>ATTENTION</b>	SEVERE	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	25	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m	200	<b>1</b>	0	0
Phosphorus	ppm	ASTM D5185m	300	<b>398</b>	326	354
Zinc	ppm	ASTM D5185m	370	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	2500	<b>435</b>	224	426

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	<b>2</b>	1	1
Sodium	ppm	ASTM D5185m		<b>0</b>	3	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0

## FLUID CLEANLINESS


method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>10000	<b>▲ 15038</b>	---	1723
Particles >6µm	ASTM D7647	>2500	<b>▲ 3914</b>	---	938
Particles >14µm	ASTM D7647	>640	<b>211</b>	---	160
Particles >21µm	ASTM D7647	>160	<b>40</b>	---	54
Particles >38µm	ASTM D7647	>40	<b>2</b>	---	8
Particles >71µm	ASTM D7647	>10	<b>0</b>	---	1
Oil Cleanliness	ISO 4406 (c)	>20/18/16	<b>▲ 21/19/15</b>	---	18/17/14

## FLUID DEGRADATION


method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.13</b>	0.20	0.17

# OIL ANALYSIS REPORT


### ▲ Particle Trend

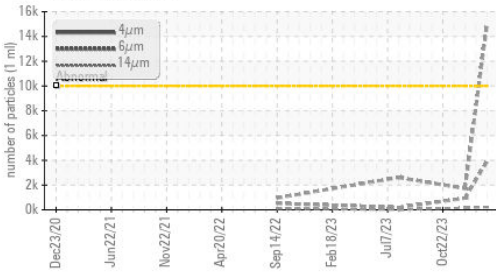


### ▲ Particle Trend

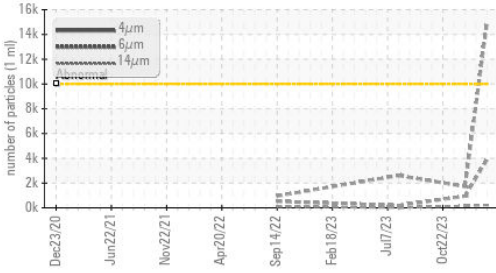

### Acid Number

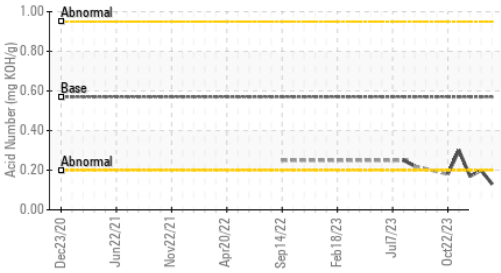


### Viscosity @ 40°C

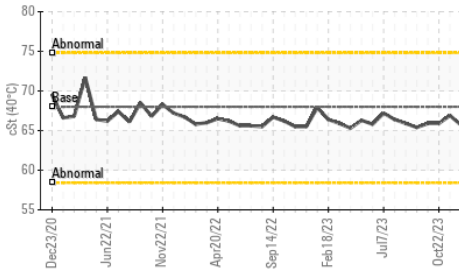






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	66.1	65.6

### SAMPLE IMAGES

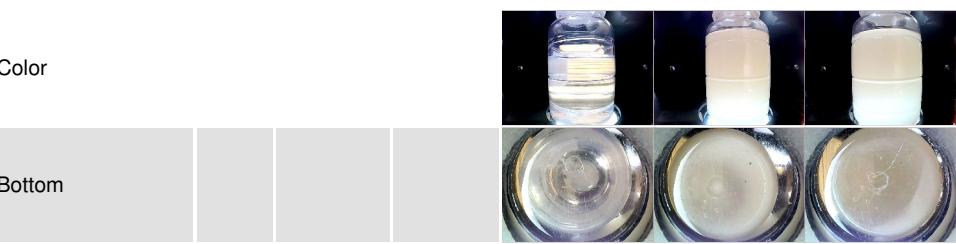

### GRAPHS

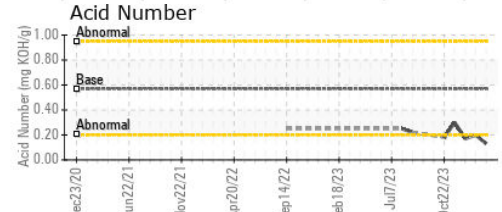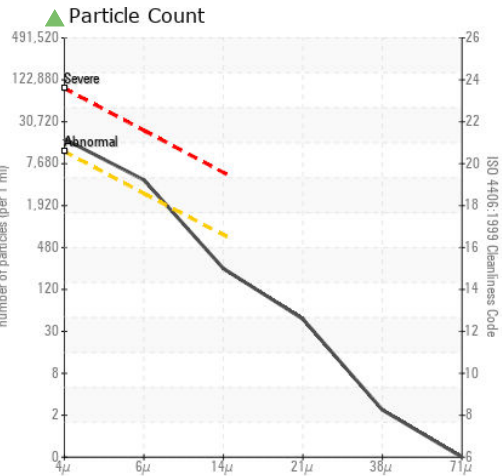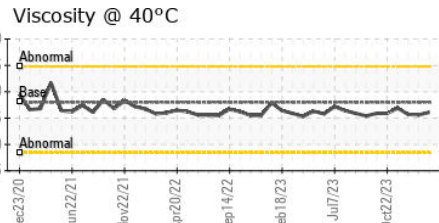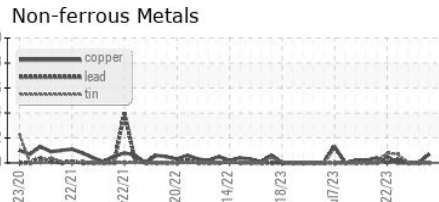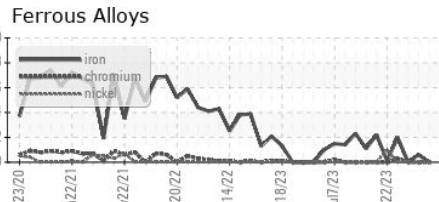

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0115877 **Received** : 19 Jan 2024  
**Lab Number** : 06065567 **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10836949 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**KraftHeinz - Kirksville - Plant 8333 PCA**  
 2504 INDUSTRIAL DR  
 KIRKSVILLE, MO  
 US 63501  
 Contact: WALLACE WARD  
 wallace.ward@kraftheinzcompany.com  
 T: (660)627-1031  
 F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)