




# OIL ANALYSIS REPORT

Sample Rating Trend

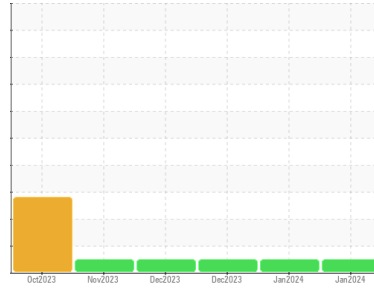

**NORMAL**



Machine Id  
**914030**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0093543</b>	GFL0048370	GFL0077273
Sample Date	Client Info		<b>16 Jan 2024</b>	10 Jan 2024	22 Dec 2023
Machine Age	hrs	Client Info	<b>1337</b>	1206	1160
Oil Age	hrs	Client Info	<b>177</b>	46	545
Oil Changed	Client Info		<b>Not Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>1</b>	3	21
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>2</b>	2	5
Titanium	ppm	ASTM D5185m	<b>17</b>	16	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	2
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	0	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>28</b>	26	188
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>20</b>	24	9
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>46</b>	45	67
Manganese	ppm	ASTM D5185m 0	<b>1</b>	0	2
Magnesium	ppm	ASTM D5185m 1010	<b>791</b>	832	913
Calcium	ppm	ASTM D5185m 1070	<b>1078</b>	1132	1071
Phosphorus	ppm	ASTM D5185m 1150	<b>985</b>	961	1002
Zinc	ppm	ASTM D5185m 1270	<b>1142</b>	1245	1194
Sulfur	ppm	ASTM D5185m 2060	<b>2943</b>	3109	2540

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	11
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	6
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	5.7	8.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.4</b>	18.3	20.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.3</b>	14.1	16.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	8.7	7.3







# OIL ANALYSIS REPORT

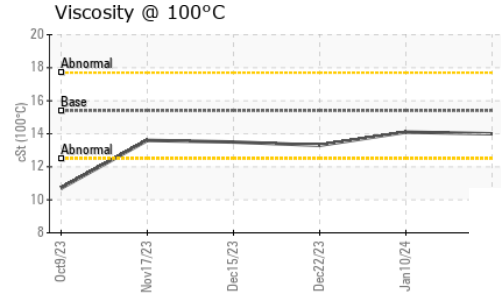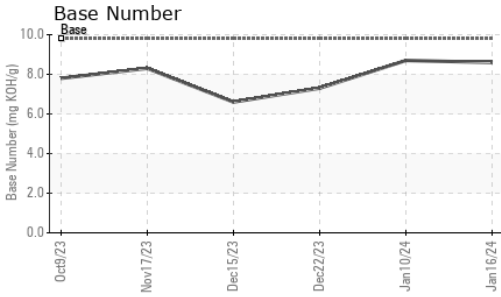

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	14.1

## GRAPHS

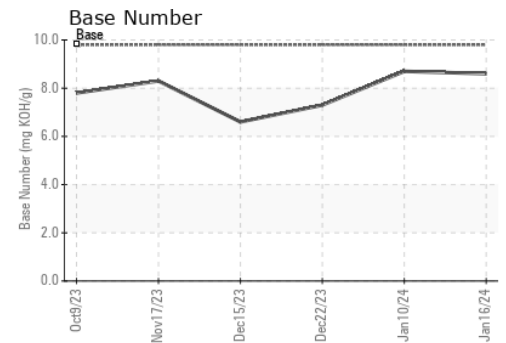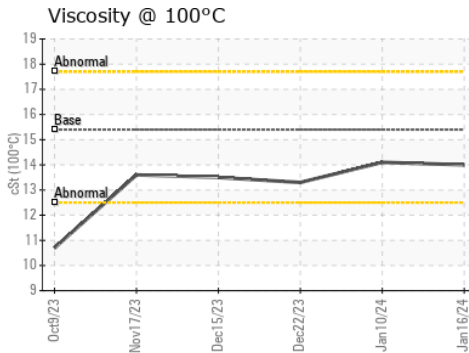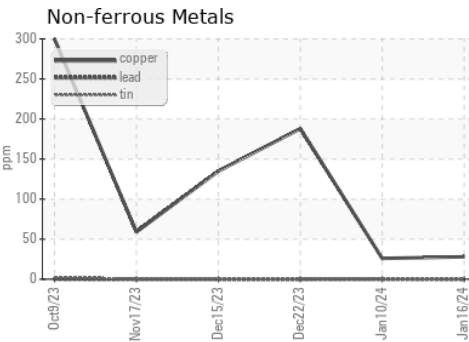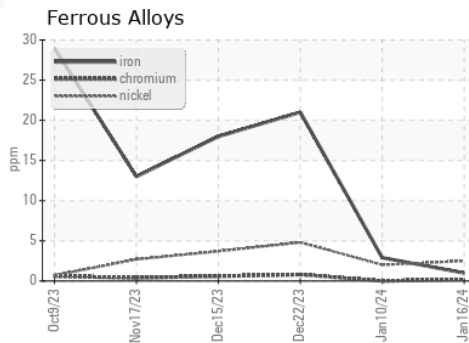

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0093543      **Received** : 19 Jan 2024  
 Lab Number : **06066103**      **Diagnosed** : 22 Jan 2024  
 Unique Number : 10842780      **Diagnostician** : Wes Davis  
 Test Package : FLEET

GFL Environmental - 891 - Oklahoma City Hauling  
 1001 South Rockwell  
 Oklahoma City, OK  
 US 73128  
 Contact: Andy Smith  
 andrew.smith@gflenv.com  
 T: (405)306-1651  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)