


OIL ANALYSIS REPORT

(59083Z) Walgreens - Tractor [Walgreens - Tractor] 136A624206

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)



DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Jan 2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103574		
Sample Date		Client Info		16 Jan 2024		
Machine Age	mls	Client Info		56334		
Oil Age	mls	Client Info		56334		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	64		
Chromium	ppm	ASTM D5185m	>5	4		
Nickel	ppm	ASTM D5185m	>2	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>30	95		
Lead	ppm	ASTM D5185m	>30	0		
Copper	ppm	ASTM D5185m	>150	98		
Tin	ppm	ASTM D5185m	>5	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	23		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	40		
Manganese	ppm		0	3		
Magnesium	ppm	ASTM D5185m	950	498		
Calcium	ppm	ASTM D5185m	1050	1512		
Phosphorus	ppm	ASTM D5185m	995	678		
Zinc	ppm	ASTM D5185m	1180	813		
Sulfur	ppm	ASTM D5185m	2600	1821		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	24		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	184		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4		
Nitration	Abs/cm	*ASTM D7624	>20	8.7		
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7		
FLUID DEGRA	NOITAC	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.9		
Base Number (BN)	mg KOH/g	ASTM D2896		8.1		



OIL ANALYSIS REPORT

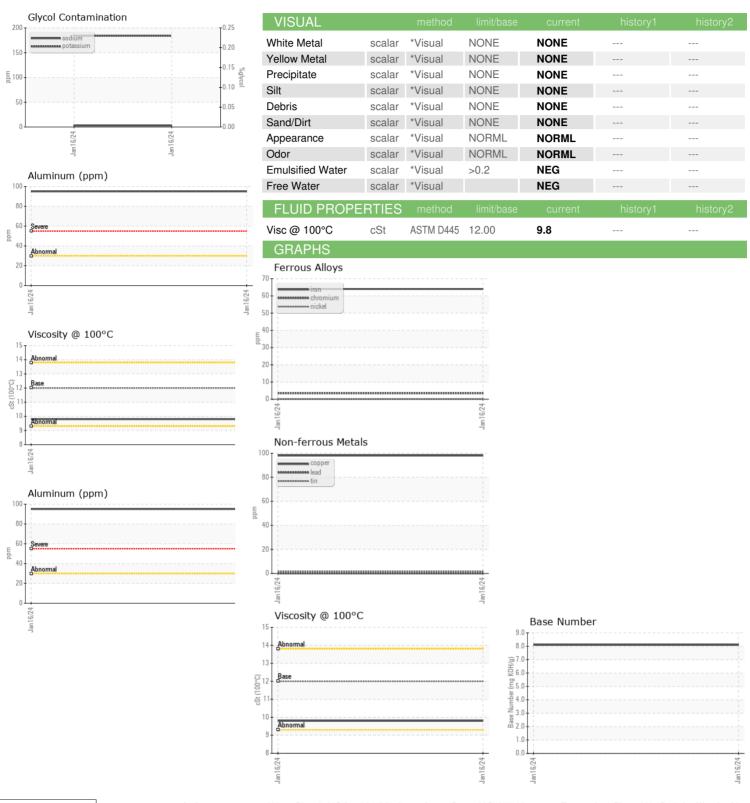



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: PCA0103574 : 06066113 : 10842790 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved : 19 Jan 2024 Diagnosed : 23 Jan 2024

: Don Baldridge Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Transervice - Shop 1369 - Berkeley-Waxahachie

710 Ovilla Road Waxahachie, TX US 75167

Contact: Robert Beal rbeal@transervice.com

T: (972)923-9928 F: (972)923-9919

Contact/Location: Robert Beal - TSV1369