




# OIL ANALYSIS REPORT

Sample Rating Trend

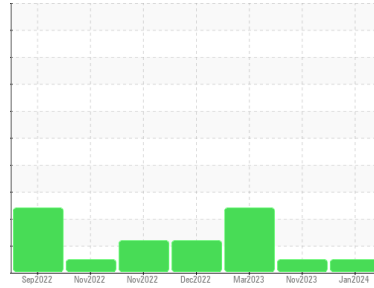

**NORMAL**



Machine Id  
**426090-402433**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0093542</b>	GFL0093552	GFL0060577
Sample Date	Client Info		<b>17 Jan 2024</b>	17 Nov 2023	23 Mar 2023
Machine Age	hrs	Client Info	<b>36358</b>	36311	3114
Oil Age	hrs	Client Info	<b>47</b>	438	607
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	1.5	12.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	4	62
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	2
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	10
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	1	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	35
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	61	55
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	2
Magnesium	ppm	ASTM D5185m 1010	<b>849</b>	888	577
Calcium	ppm	ASTM D5185m 1070	<b>930</b>	1002	1980
Phosphorus	ppm	ASTM D5185m 1150	<b>983</b>	995	1052
Zinc	ppm	ASTM D5185m 1270	<b>1134</b>	1147	1231
Sulfur	ppm	ASTM D5185m 2060	<b>2776</b>	3080	3535

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	15
Sodium	ppm	ASTM D5185m	<b>27</b>	8	0
Potassium	ppm	ASTM D5185m >20	<b>43</b>	17	0
Glycol	%	*ASTM D2982	<b>0.0</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>1.6</b>	0.7	3.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	4.7	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.8</b>	18.0	23.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.8</b>	12.3	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.7</b>	9.5	6.4







# OIL ANALYSIS REPORT

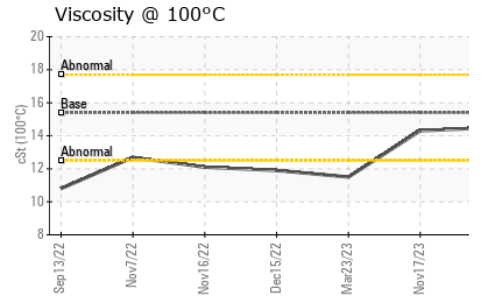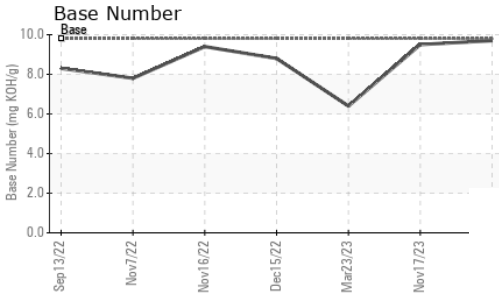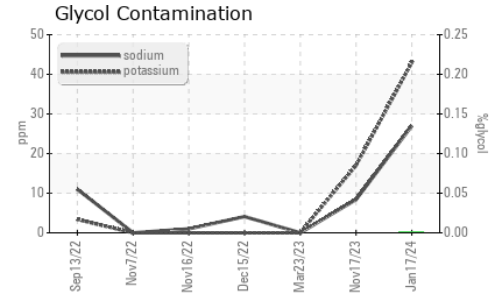

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.5	14.3 ▲ 11.5

## GRAPHS

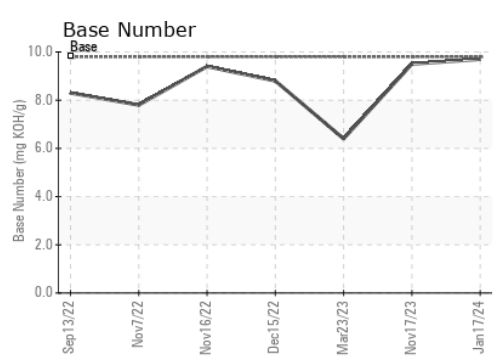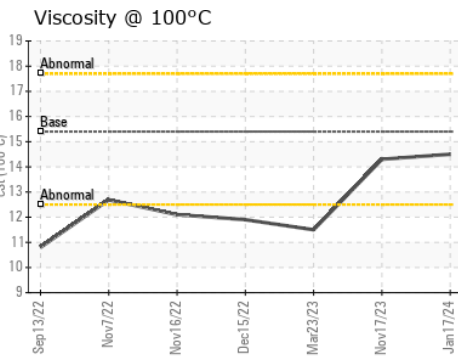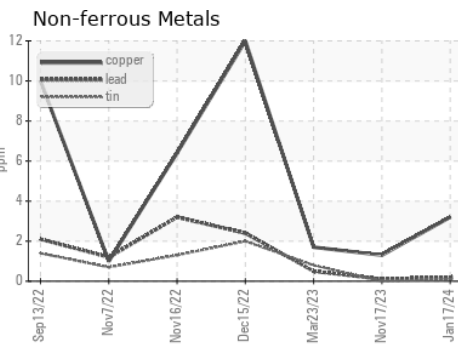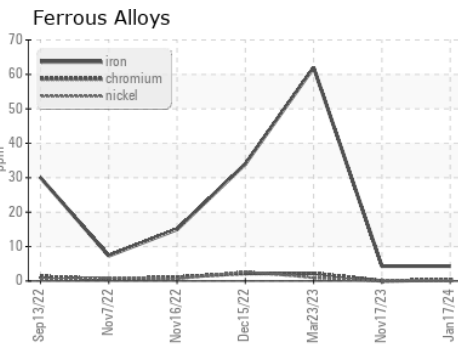

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0093542 **Received** : 19 Jan 2024  
**Lab Number** : 06066130 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10842807 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 891 - Oklahoma City Hauling**  
 1001 South Rockwell  
 Oklahoma City, OK  
 US 73128  
 Contact: Andy Smith  
 andrew.smith@gflenv.com  
 T: (405)306-1651  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)