




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**EX0072-404**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

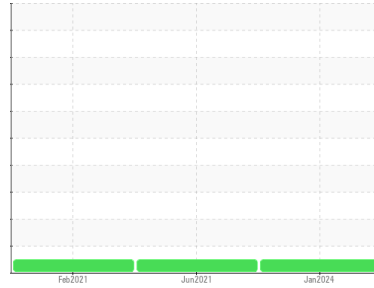

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0096090</b>	GFL0027898	GFL0018733
Sample Date	Client Info		<b>17 Jan 2024</b>	07 Jun 2021	09 Feb 2021
Machine Age	hrs	Client Info	<b>16780</b>	14875	14545
Oil Age	hrs	Client Info	<b>1839</b>	300	250
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>8</b>	7	6
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>14</b>	6	7
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	0	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>100</b>	244	200
Barium	ppm	ASTM D5185m	<b>3</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>45</b>	83	77
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>690</b>	582	644
Calcium	ppm	ASTM D5185m	<b>1477</b>	1369	1500
Phosphorus	ppm	ASTM D5185m 760	<b>735</b>	679	717
Zinc	ppm	ASTM D5185m 830	<b>839</b>	795	793
Sulfur	ppm	ASTM D5185m 2770	<b>3381</b>	2113	2205

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>0</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>5</b>	2	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	10.2	9.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.5</b>	22	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	18.1	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>7.8</b>	8.6	8.2







# OIL ANALYSIS REPORT

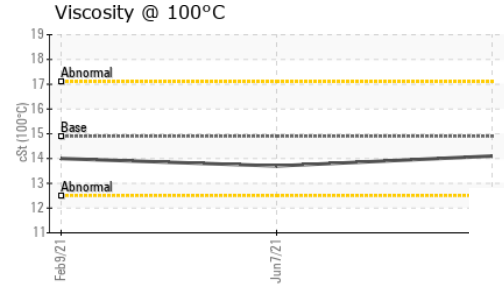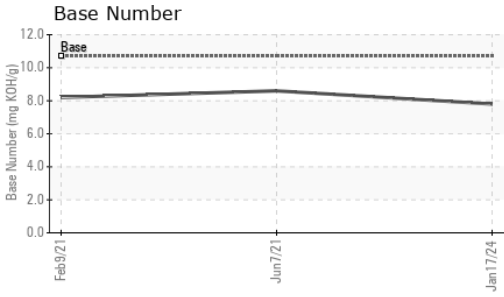

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	<b>14.1</b>	13.7	14.0

## GRAPHS

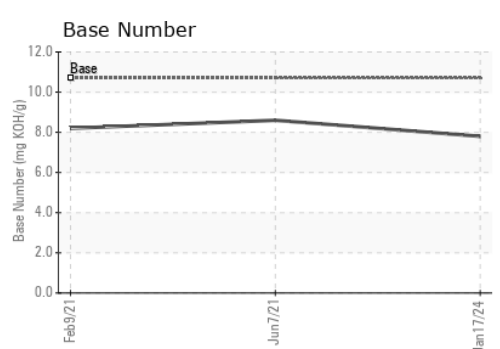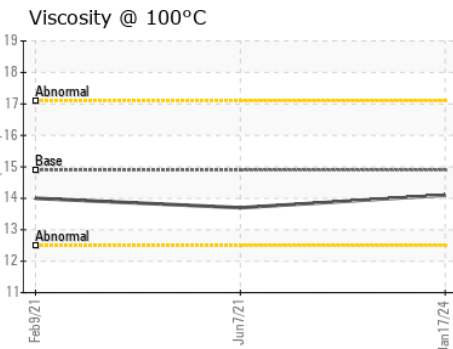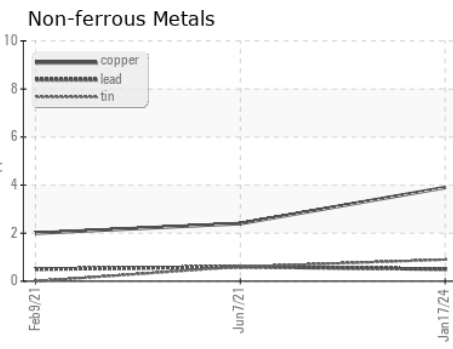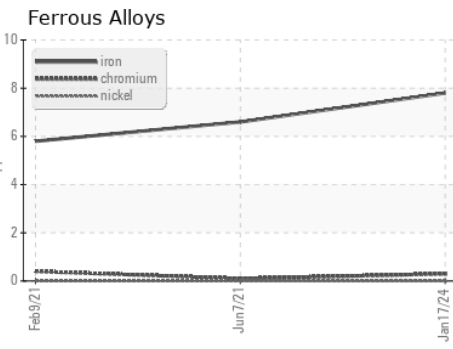

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0096090 **Received** : 22 Jan 2024  
**Lab Number** : **06066491** **Diagnosed** : 22 Jan 2024  
**Unique Number** : 10843168 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 629 - Northern A1**  
 3947 US 131 N  
 Kalkaska, MI  
 US 49646-8428  
 Contact: MITCH HERSHBERGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (231)624-0848  
F: