




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

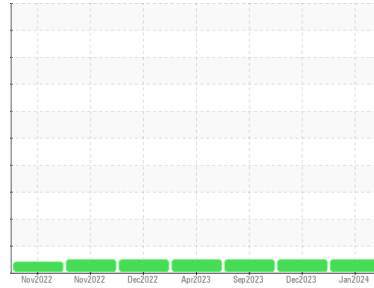

Machine Id
357048-630220

Component
Gasoline Engine

Fluid
GASOLINE ENGINE OIL SAE 5W20 (--- Shots)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102582	GFL0102576	GFL0080389
Sample Date	Client Info	17 Jan 2024	19 Dec 2023	06 Sep 2023
Machine Age	mls	299912	297133	284344
Oil Age	mls	0	0	0
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >150	8	4	3
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >5	0	0	0
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >40	3	3	<1
Lead	ppm ASTM D5185m >50	<1	0	0
Copper	ppm ASTM D5185m >155	5	3	0
Tin	ppm ASTM D5185m >10	<1	<1	<1
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 75	35	86	42
Barium	ppm ASTM D5185m 5	15	13	0
Molybdenum	ppm ASTM D5185m 100	113	122	70
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m 12	395	427	437
Calcium	ppm ASTM D5185m 2100	1237	1267	1084
Phosphorus	ppm ASTM D5185m 650	679	722	644
Zinc	ppm ASTM D5185m 850	755	817	740
Sulfur	ppm ASTM D5185m 2500	2887	2925	2413

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	8	8	8
Sodium	ppm ASTM D5185m >50	0	3	<1
Potassium	ppm ASTM D5185m >20	1	4	0

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	9.8	8.3	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	23.2	19.0	14.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.5	12.1	8.2
Base Number (BN)	mg KOH/g ASTM D2896	2.5	5.0	6.1







OIL ANALYSIS REPORT

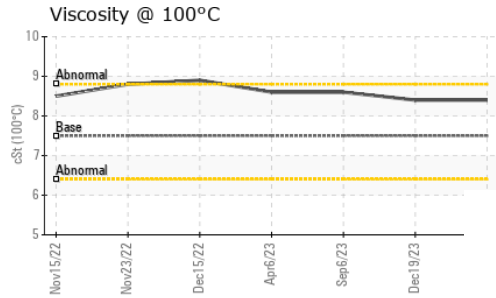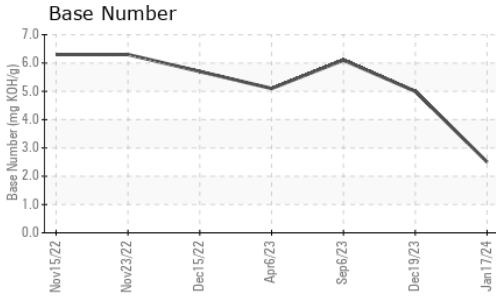

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 7.5	8.4	8.4	8.6

GRAPHS

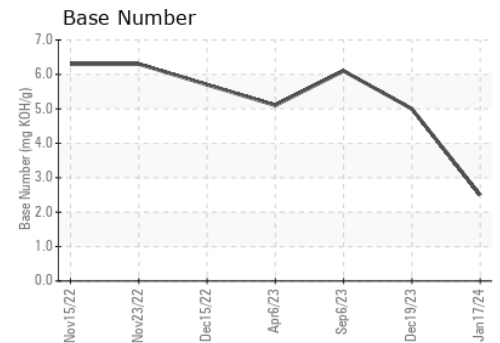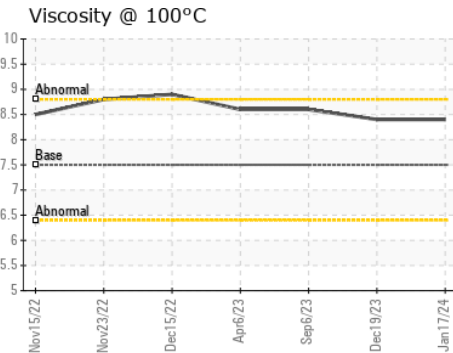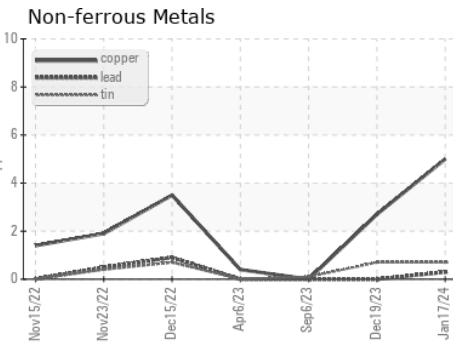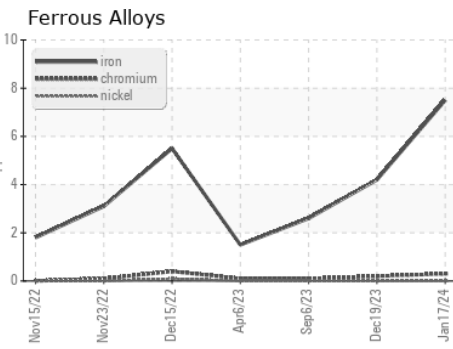

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102582 **Received** : 22 Jan 2024
Lab Number : 06066493 **Diagnosed** : 22 Jan 2024
Unique Number : 10843170 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 892 - Pauls Valley Hauling
 405 East Airport Industrial Road
 Pauls Valley, OK
 US 73075
 Contact: Tony Graham
 tgraham2@wcamerica.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: