




PROBLEM SUMMARY

Sample Rating Trend

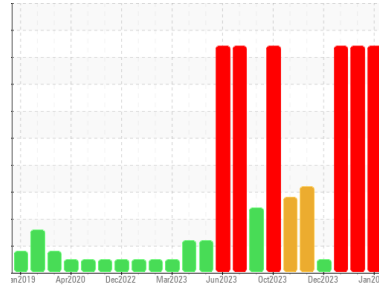

GLYCOL




Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

Glycol Contamination

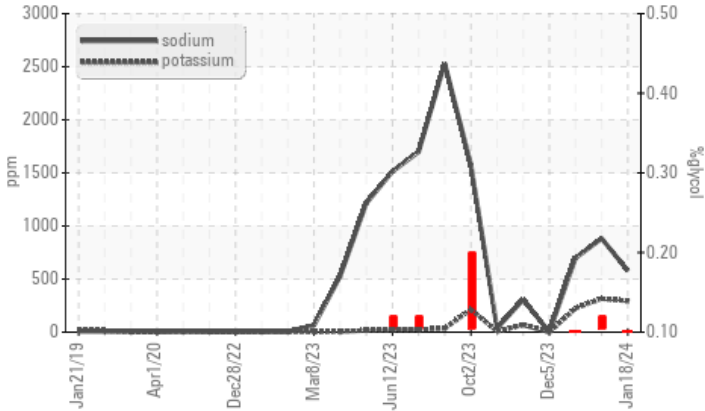

RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Potassium	ppm	ASTM D5185m	>20	▲ 293	▲ 316	▲ 225
Glycol	%	*ASTM D2982		● 0.10	● 0.12	● 0.10

Customer Id: GFL821
 Sample No.: GFL0105169
 Lab Number: 06066536
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Flush System	---	---	?	We advise that you flush the component thoroughly before re-filling with oil.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

09 Jan 2024 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



20 Dec 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



05 Dec 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

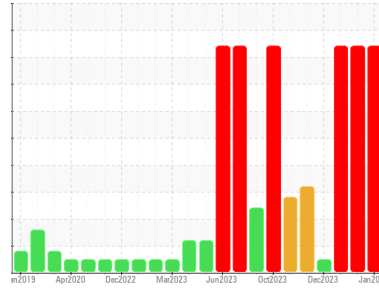

GLYCOL



Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0105169	GFL0105150	GFL0090322
Sample Date	Client Info		18 Jan 2024	09 Jan 2024	20 Dec 2023
Machine Age	hrs	Client Info	20426	20303	20254
Oil Age	hrs	Client Info	150	600	450
Oil Changed	Client Info		Not Changed	Changed	Not Changed
Sample Status			SEVERE	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>110	11	37	29
Chromium	ppm	ASTM D5185m	>4	<1	2	2
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	3	3
Lead	ppm	ASTM D5185m	>45	<1	<1	<1
Copper	ppm	ASTM D5185m	>85	<1	1	1
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	1	0
Barium	ppm	ASTM D5185m	0	3	0	0
Molybdenum	ppm	ASTM D5185m	60	119	146	118
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	930	912	881
Calcium	ppm	ASTM D5185m	1070	1040	1046	943
Phosphorus	ppm	ASTM D5185m	1150	931	931	932
Zinc	ppm	ASTM D5185m	1270	1217	1204	1163
Sulfur	ppm	ASTM D5185m	2060	3296	3002	2886

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	3	7	8
Sodium	ppm	ASTM D5185m		579	882	698
Potassium	ppm	ASTM D5185m	>20	293	316	225
Glycol	%	*ASTM D2982		0.10	0.12	0.10

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.3	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	8.5	13.0	12.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	22.5	21.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	19.2	18.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	10.3	8.7	8.7




OIL ANALYSIS REPORT


Glycol Contamination

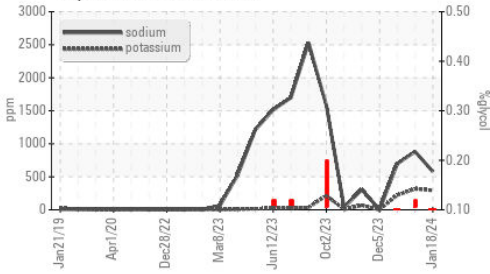

Base Number

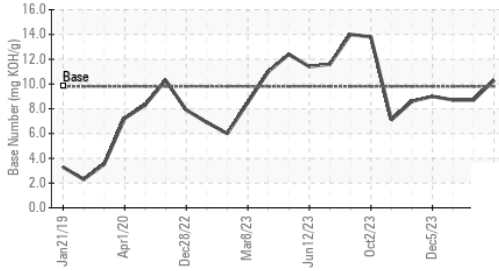

Viscosity @ 100°C

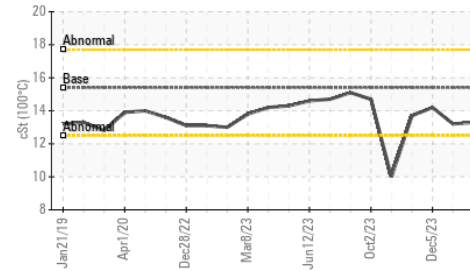

VISUAL


method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.3	13.2

GRAPHS


Ferrous Alloys

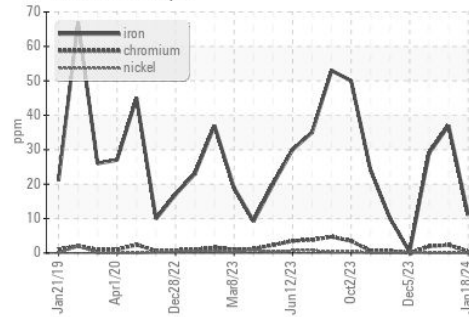


Non-ferrous Metals

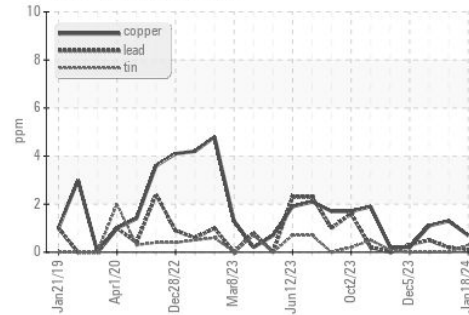

Viscosity @ 100°C

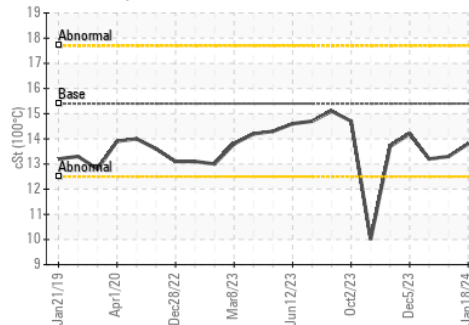

Base Number

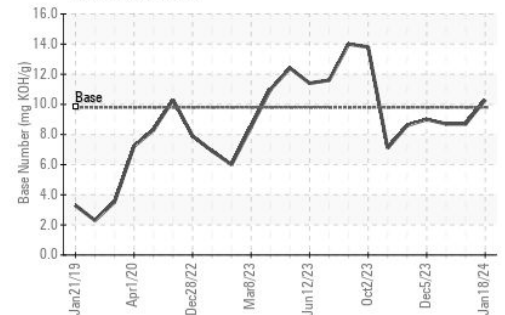

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0105169
 Lab Number : 06066536
 Unique Number : 10843213
 Test Package : FLEET

GFL Environmental - 821 - Ozarks Hauling
 33924 Olath Drive
 Lebanon, MO
 US 65536
 Contact: Landen Johnson
 landen.johnson@gflenv.com
 T: (417)664-0010
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)