




OIL ANALYSIS REPORT

Sample Rating Trend

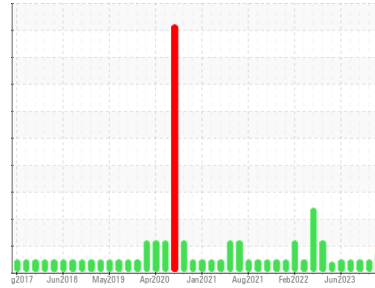

FUEL



Area
(DUX488)
Machine Id
AUTOCAR 10672

Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109104	GFL0086189	GFL0086272
Sample Date	Client Info	17 Jan 2024	27 Sep 2023	09 Aug 2023
Machine Age	hrs	28274	27480	27480
Oil Age	hrs	0	27721	27480
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		MARGINAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	15	17	19
Chromium	ppm ASTM D5185m >5	1	<1	<1
Nickel	ppm ASTM D5185m >4	0	1	3
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >15	4	2	6
Lead	ppm ASTM D5185m >25	0	0	<1
Copper	ppm ASTM D5185m >100	<1	1	2
Tin	ppm ASTM D5185m >4	0	<1	0
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	20	24	25
Barium	ppm ASTM D5185m 0	0	0	2
Molybdenum	ppm ASTM D5185m 60	55	62	65
Manganese	ppm ASTM D5185m 0	0	<1	<1
Magnesium	ppm ASTM D5185m 1010	714	784	726
Calcium	ppm ASTM D5185m 1070	1044	1074	1180
Phosphorus	ppm ASTM D5185m 1150	914	918	934
Zinc	ppm ASTM D5185m 1270	1104	1133	1128
Sulfur	ppm ASTM D5185m 2060	2895	2960	3136

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	6	4
Sodium	ppm ASTM D5185m	3	4	0
Potassium	ppm ASTM D5185m >20	3	3	4
Fuel	% ASTM D3524 >3.0	▲ 1.4	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.2	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	6.4	5.7	5.6
Sulfation	Abs/.1mm *ASTM D7415 >30	16.5	16.6	16.7


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.0	11.6	11.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.7	8.2	8.1




OIL ANALYSIS REPORT


Fuel Dilution

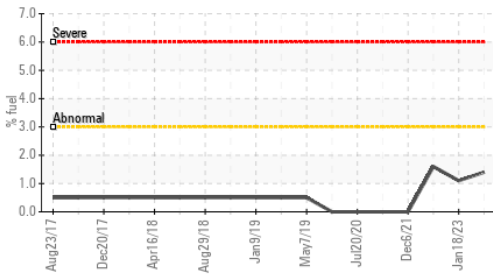

Base Number

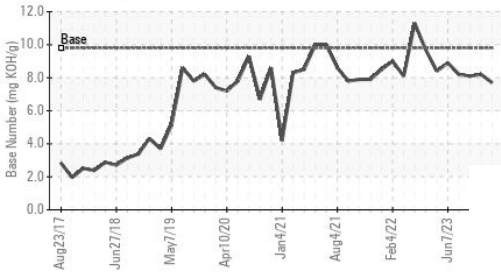

Viscosity @ 100°C

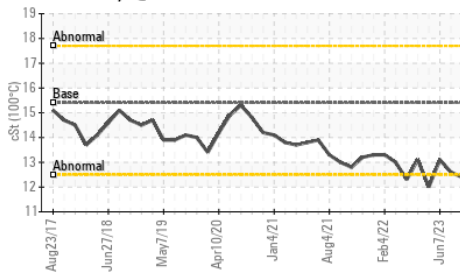


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.0	12.4

GRAPHS


Ferrous Alloys

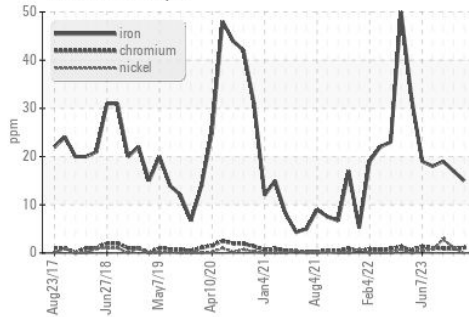


Non-ferrous Metals

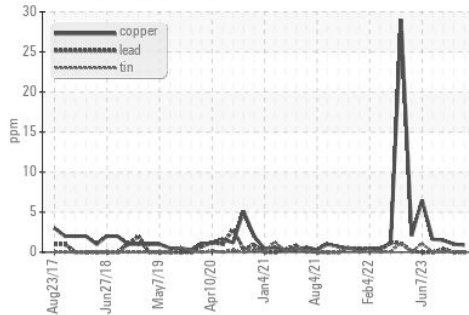

Viscosity @ 100°C

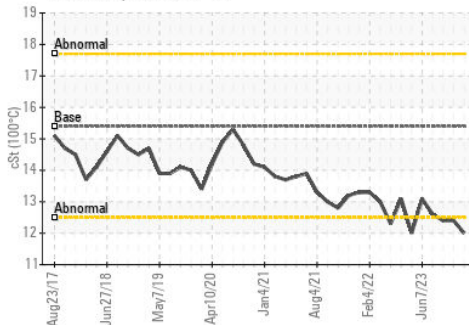

Base Number

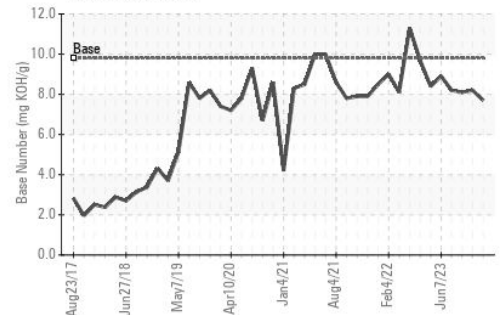

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0109104 Recieved : 22 Jan 2024
 Lab Number : 06066613 Diagnosed : 24 Jan 2024
 Unique Number : 10843290 Diagnostician : Wes Davis
 Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 009 - Fairburn
 6905 Roosevelt Hwy
 Fairburn, GA
 US 30213
 Contact: Eric Jones
 erjones@gflenv.com
 T: (678)630-9927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)