


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

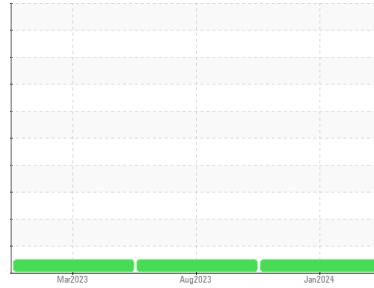

Area  
**(92417X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A62004**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0110579</b>	PCA0093541	PCA0082384
Sample Date	Client Info			<b>11 Jan 2024</b>	29 Aug 2023	28 Mar 2023
Machine Age	mls	Client Info		<b>349324</b>	321430	0
Oil Age	mls	Client Info		<b>321430</b>	30373	26369
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>13</b>	21	11
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>7</b>	33	7
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	<1	<1
Lead	ppm	ASTM D5185m	>40	<b>2</b>	11	4
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>12</b>	14	10
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>51</b>	31	44
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>823</b>	653	805
Calcium	ppm	ASTM D5185m	1050	<b>1206</b>	1693	1415
Phosphorus	ppm	ASTM D5185m	995	<b>943</b>	991	981
Zinc	ppm	ASTM D5185m	1180	<b>1241</b>	1255	1253
Sulfur	ppm	ASTM D5185m	2600	<b>3004</b>	3890	3450

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m		<b>4</b>	2	1
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	5	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	10.1	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.9</b>	21.8	20.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	16.5	15.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.9</b>	5.8	7.2





# OIL ANALYSIS REPORT

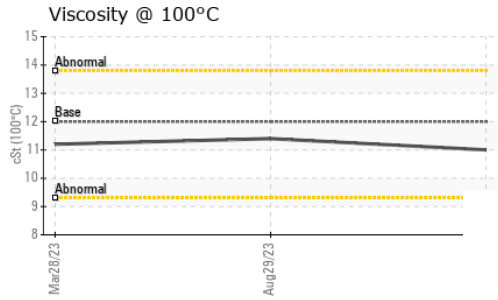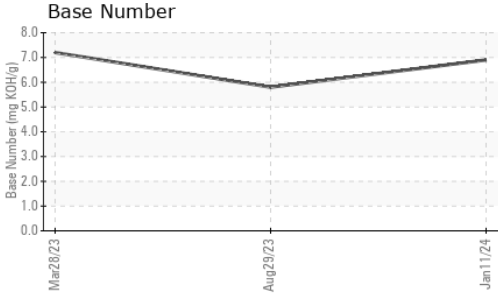

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	11.4	11.2

## GRAPHS

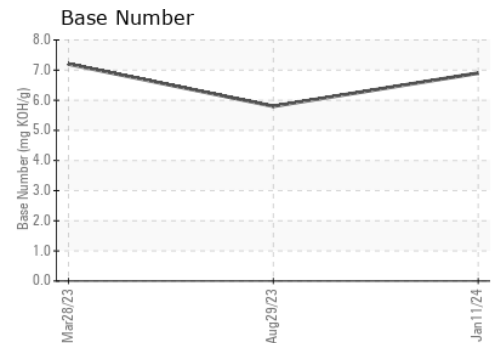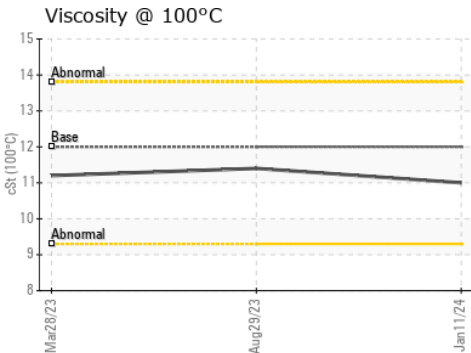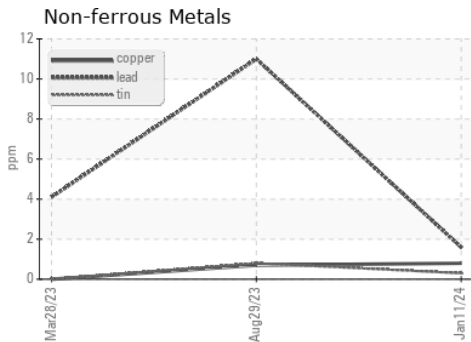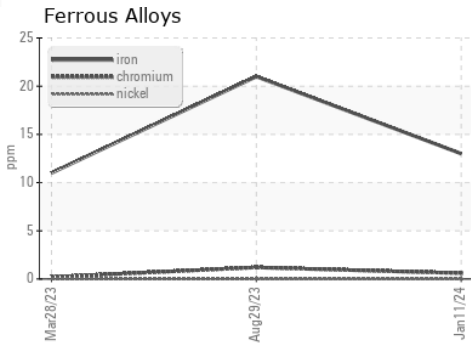

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110579 **Received** : 22 Jan 2024  
**Lab Number** : **06067337** **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10844014 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1376 - Berkeley-Linden**  
 3425 Tremley Point Road  
 Linden, NJ  
 US 07036  
 Contact: Shop 1376 Oil Analysis  
 shop1376@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: