


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

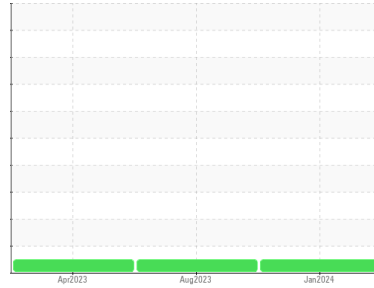

Area  
**(14246Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61447**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0110570</b>	PCA0093542	PCA0096549
Sample Date	Client Info		<b>08 Jan 2024</b>	25 Aug 2023	19 Apr 2023
Machine Age	mls	Client Info	<b>221845</b>	197157	163633
Oil Age	mls	Client Info	<b>24688</b>	163633	163633
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>15</b>	22	15
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>6</b>	17	8
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>3</b>	8	<1
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>10</b>	6	10
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>53</b>	50	46
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>835</b>	879	748
Calcium	ppm	ASTM D5185m 1050	<b>1155</b>	1505	1415
Phosphorus	ppm	ASTM D5185m 995	<b>947</b>	1056	975
Zinc	ppm	ASTM D5185m 1180	<b>1231</b>	1332	1216
Sulfur	ppm	ASTM D5185m 2600	<b>2974</b>	3830	3578

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>1</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>5</b>	5	6



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	10.6	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.5</b>	23.1	20.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.1</b>	18.8	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.8</b>	5.7	7.0





# OIL ANALYSIS REPORT

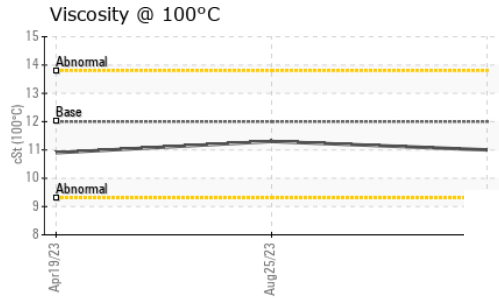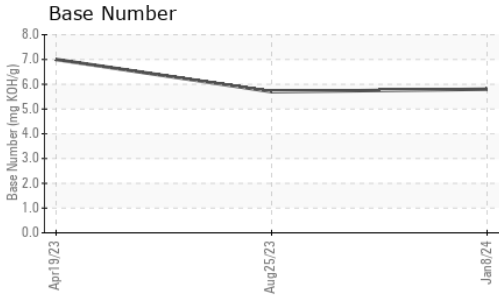

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	11.3	10.9

## GRAPHS

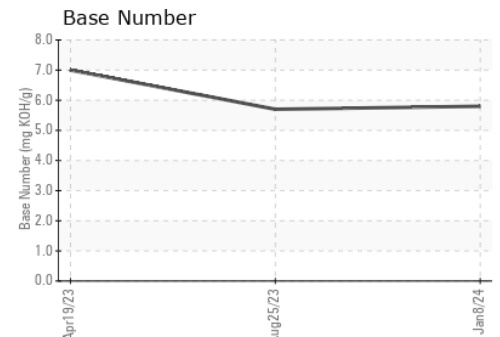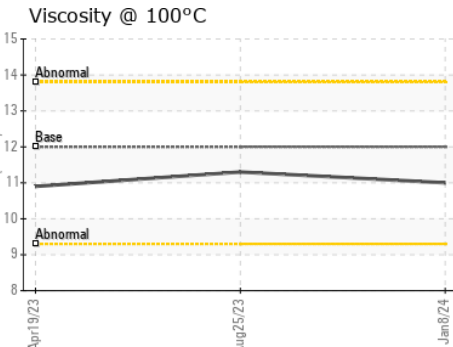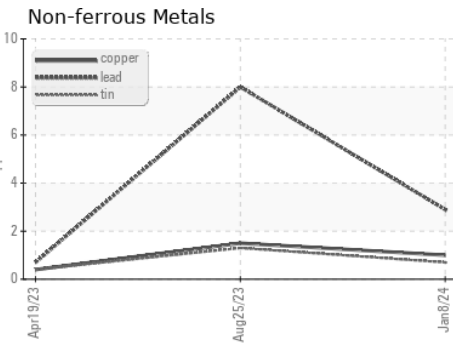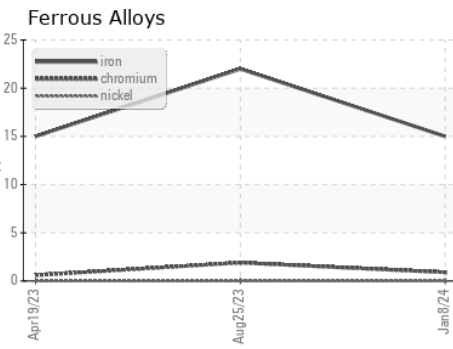

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110570 **Received** : 22 Jan 2024  
**Lab Number** : **06067341** **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10844018 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1376 - Berkeley-Linden**  
 3425 Tremley Point Road  
 Linden, NJ  
 US 07036  
 Contact: Shop 1376 Oil Analysis  
 shop1376@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: