




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

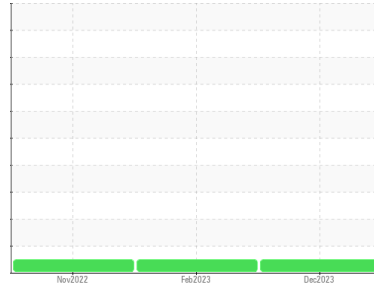

Area  
**(MC9414)**

Machine Id  
**924014**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0069954</b>	GFL0059602	GFL0059611
Sample Date	Client Info		<b>29 Dec 2023</b>	09 Feb 2023	04 Nov 2022
Machine Age	mls	Client Info	<b>22403</b>	21064	20441
Oil Age	mls	Client Info	<b>600</b>	600	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>26</b>	19	27
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >150	<b>5</b>	9	33
Copper	ppm	ASTM D5185m >90	<b>4</b>	5	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	27	36
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	56	47
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>963</b>	791	600
Calcium	ppm	ASTM D5185m 1070	<b>1087</b>	1544	1855
Phosphorus	ppm	ASTM D5185m 1150	<b>997</b>	924	850
Zinc	ppm	ASTM D5185m 1270	<b>1288</b>	1139	1034
Sulfur	ppm	ASTM D5185m 2060	<b>2673</b>	3179	2623

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>26</b>	5	8
Sodium	ppm	ASTM D5185m	<b>3</b>	7	7
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.6</b>	0.1	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.4</b>	6.8	16.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.4</b>	17.2	32.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.9</b>	12.6	39.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.1</b>	7.9	6.7







# OIL ANALYSIS REPORT

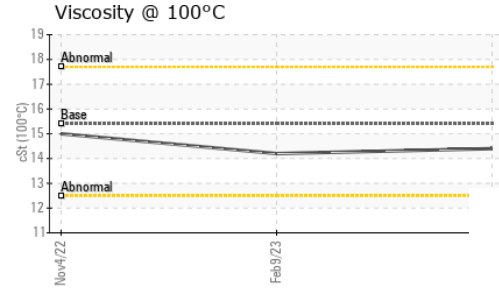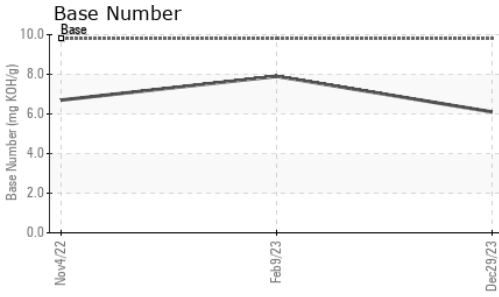

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.2	15.0

## GRAPHS

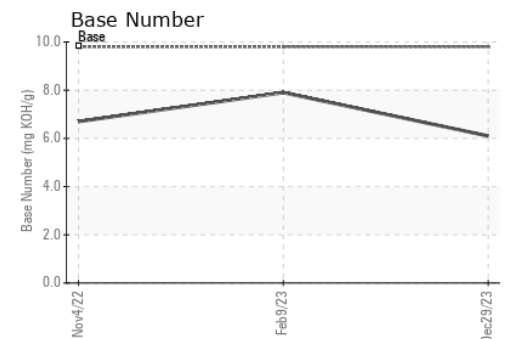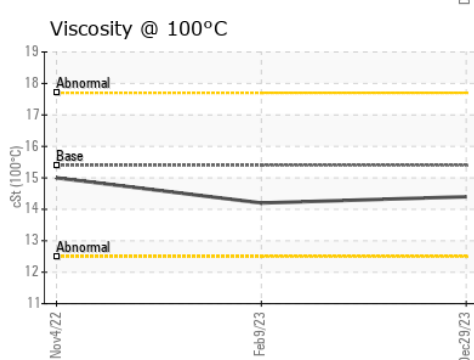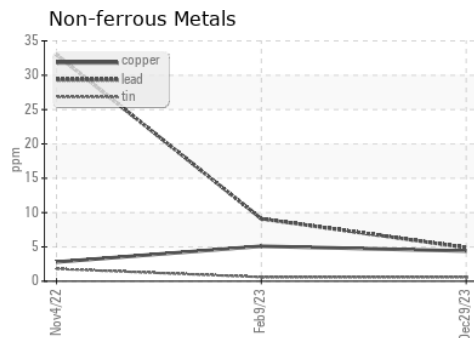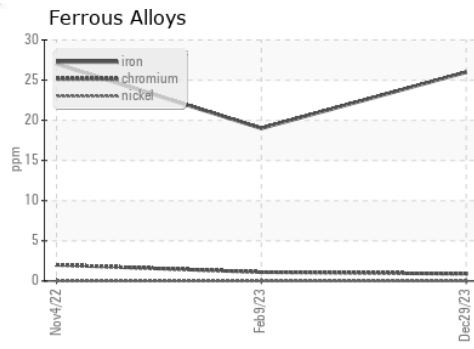

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0069954 **Received** : 22 Jan 2024  
**Lab Number** : **06067355** **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10844032 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 902 - Chilton HC**  
 428 High St  
 Chilton, WI  
 US 53014  
 Contact: Keith Mueller  
 keith.mueller@gflenv.com  
 T: (920)374-1404  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)