


OIL ANALYSIS REPORT

(68542Z) Walgreens - Tractor [Walgreens - Tractor] 136A624282

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

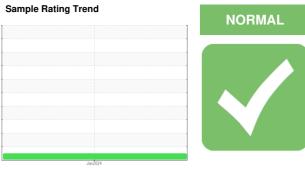

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

GAL)				Jan2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0105868		
Sample Date		Client Info		16 Jan 2024		
Machine Age	mls	Client Info		30693		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	30		
Chromium	ppm	ASTM D5185m	>5	3		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	43		
Lead	ppm	ASTM D5185m	>30	3		
Copper	ppm	ASTM D5185m	>150	198		
Tin	ppm	ASTM D5185m	>5	4		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	29		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	39		
Manganese	ppm	ASTM D5185m	0	3		
Magnesium	ppm	ASTM D5185m	950	560		
Calcium	ppm	ASTM D5185m	1050	1526		
Phosphorus	ppm	ASTM D5185m	995	731		
Zinc	ppm	ASTM D5185m	1180	852		
Sulfur	ppm	ASTM D5185m	2600	2049		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	114		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5		
Nitration	Abs/cm	*ASTM D7624	>20	8.9		
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4		
FLUID DEGRA	OATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.8		
Base Number (BN)	mg KOH/g	ASTM D2896		8.0		



OIL ANALYSIS REPORT

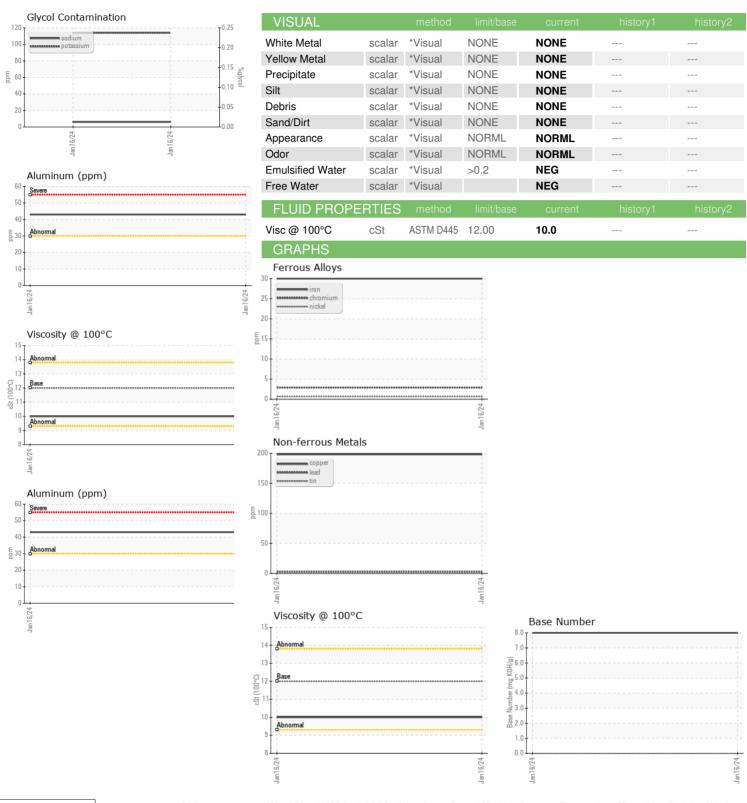



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: 06067481

: PCA0105868 : 10844158 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved : 22 Jan 2024 Diagnosed : 24 Jan 2024 Diagnostician : Don Baldridge

Transervice - Shop 1361 - Berkeley-Windsor 4400 State Road 19 Windsor, WI US 53598 Contact: Mike Hurda

To discuss this sample report, contact Customer Service at 1-800-237-1369. mhurda@transervice.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (608)846-2726 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (608)846-0389