




OIL ANALYSIS REPORT

Sample Rating Trend

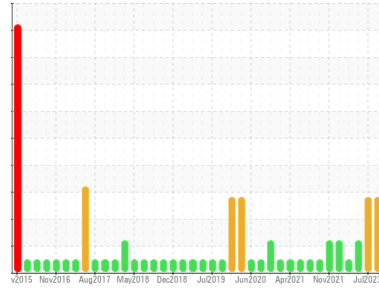

FUEL



Area
(EIB906)

Machine Id
3665

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0072108	GFL0074590	GFL0083609
Sample Date	Client Info	15 Jan 2024	18 Jul 2023	16 May 2023
Machine Age	hrs	20299	20178	19735
Oil Age	hrs	600	20178	18891
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ATTENTION	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>75	7	20	11
Chromium	ppm	ASTM D5185m	>5	<1	1	1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m	>2	1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>15	2	1	2
Lead	ppm	ASTM D5185m	>25	0	2	<1
Copper	ppm	ASTM D5185m	>100	<1	1	<1
Tin	ppm	ASTM D5185m	>4	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	▲ 51	<1	7
Barium	ppm	ASTM D5185m	0	0	2	0
Molybdenum	ppm	ASTM D5185m	60	37	52	59
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	▲ 505	621	868
Calcium	ppm	ASTM D5185m	1070	▲ 1472	797	1004
Phosphorus	ppm	ASTM D5185m	1150	▲ 724	704	933
Zinc	ppm	ASTM D5185m	1270	▲ 866	881	1162
Sulfur	ppm	ASTM D5185m	2060	2505	2219	3325

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	10	0	10
Sodium	ppm	ASTM D5185m		14	30	28
Potassium	ppm	ASTM D5185m	>20	2	1	2
Fuel	%	ASTM D3524	>3.0	▲ 1.5	23.9	▲ 5.0

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>6	0.1	0.8	0.4
Nitration	Abs/cm	*ASTM D7624	>20	4.9	9.1	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	18.5	18.3


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.3	14.3	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	10.5	5.9	7.7




OIL ANALYSIS REPORT


▲ Additives

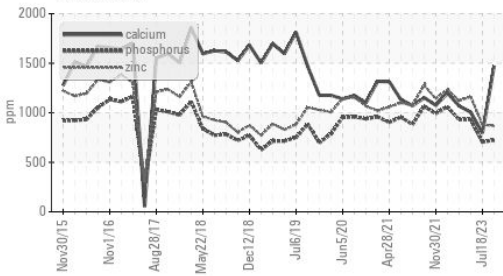


▲ Fuel Dilution

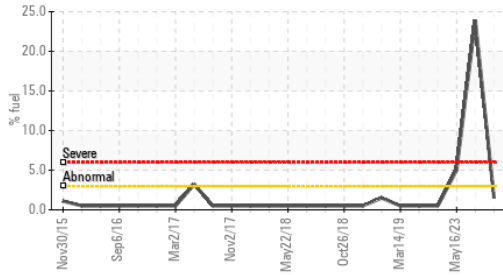

Base Number

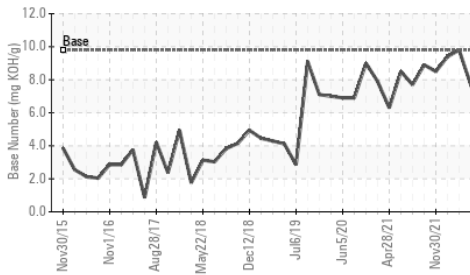

Viscosity @ 100°C

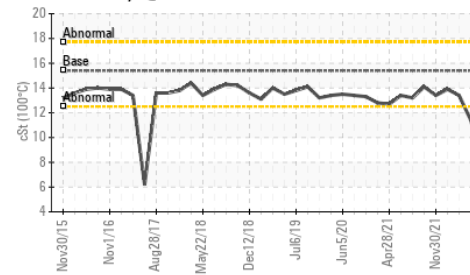


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.4	8.1

GRAPHS


Ferrous Alloys

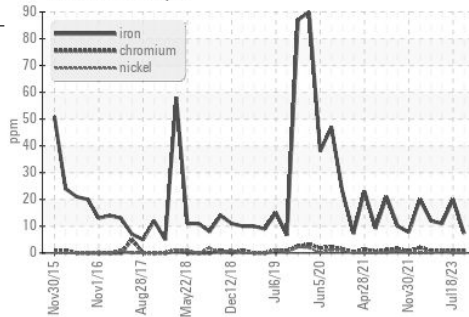


Non-ferrous Metals

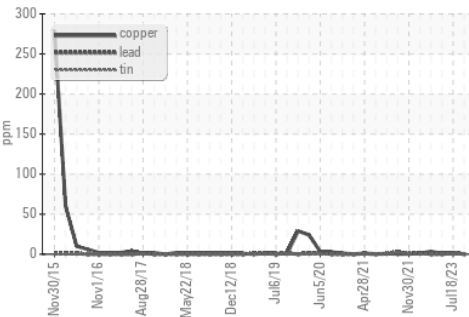

Viscosity @ 100°C

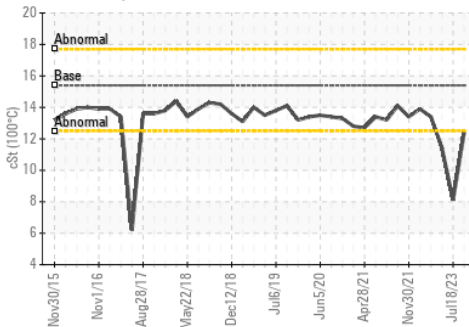

Base Number

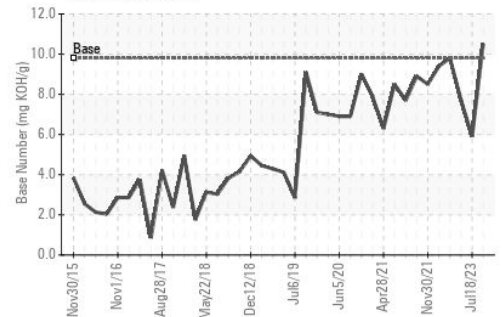

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0072108 **Received** : 22 Jan 2024
Lab Number : 06067569 **Diagnosed** : 24 Jan 2024
Unique Number : 10844246 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 094 - Cedartown
 2097 Buchanan Highway
 Cedartown, GA
 US 30125
 Contact: WILLIAM FOSTER
 william.foster@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)