


# OIL ANALYSIS REPORT

Sample Rating Trend



**DEGRADATION**

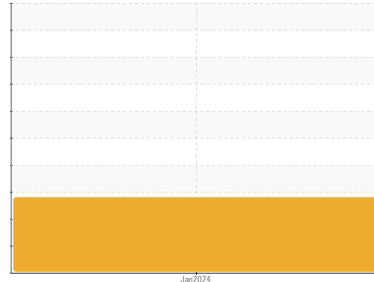

Machine Id  
**N100**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

### ▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

### ▲ Contamination

There is a moderate amount of fuel present in the oil.

### ▲ Fluid Condition

The BN level is low. The oil is no longer serviceable.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0083003</b>	---	---
Sample Date	Client Info		<b>21 Jan 2024</b>	---	---
Machine Age	mls	Client Info	<b>0</b>	---	---
Oil Age	mls	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>▲ 186</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>5</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>12</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>3</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>82</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>61</b>	---	---
Manganese	ppm	ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>72</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1449</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>742</b>	---	---
Zinc	ppm	ASTM D5185m	<b>855</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>1856</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>14</b>	---	---
Sodium	ppm	ASTM D5185m	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	---	---
Fuel	%	ASTM D3524 >5	<b>▲ 5.9</b>	---	---





## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>17.0</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>49.2</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>71.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>▲ 0.0</b>	---	---





# OIL ANALYSIS REPORT

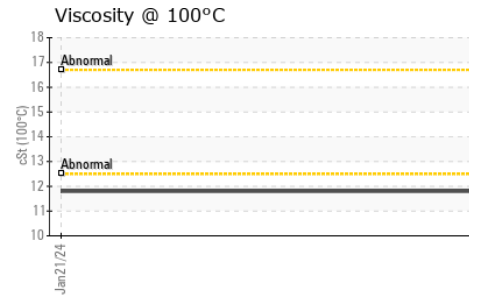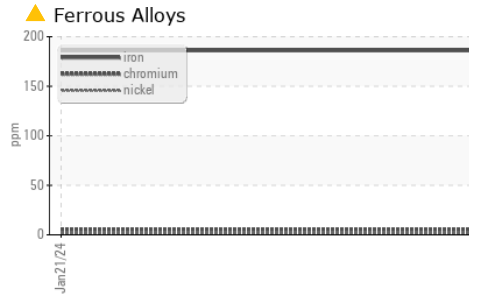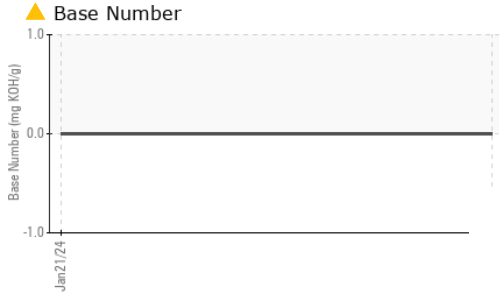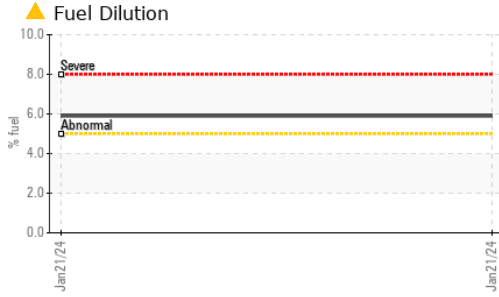

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.8	---	---

## GRAPHS

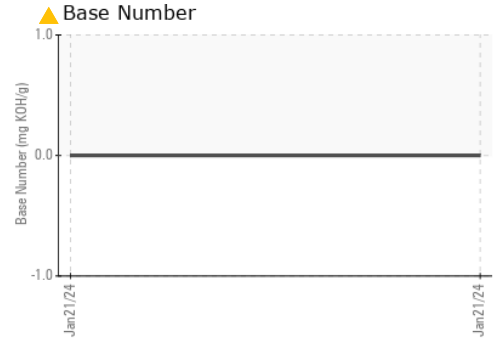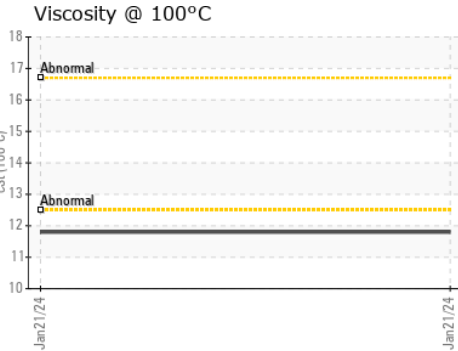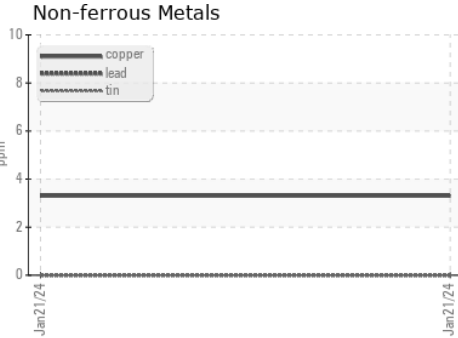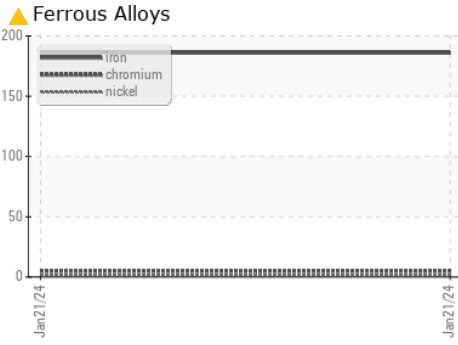

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0083003 **Received** : 22 Jan 2024  
**Lab Number** : 06067592 **Diagnosed** : 24 Jan 2024  
**Unique Number** : 10844269 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**BEAUDRY OIL & PROPANE**  
 630 PROCTOR AVE NW  
 ELK RIVER, MN  
 US 55330  
 Contact: JEFF HERMAN  
 jeffh@beaudryoil.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (763)633-1432