




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

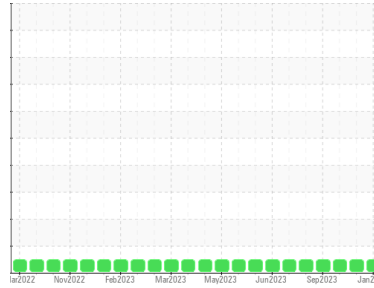

Machine Id  
**429074-27**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110610</b>	GFL0100250	GFL0091237
Sample Date	Client Info		<b>18 Jan 2024</b>	12 Dec 2023	25 Oct 2023
Machine Age	hrs	Client Info	<b>12231</b>	12017	220189
Oil Age	hrs	Client Info	<b>150</b>	200	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>8</b>	5	2
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	1
Barium	ppm	ASTM D5185m 0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	59	61
Manganese	ppm	ASTM D5185m 0	<b>1</b>	0	0
Magnesium	ppm	ASTM D5185m 1010	<b>994</b>	942	915
Calcium	ppm	ASTM D5185m 1070	<b>1015</b>	1030	1011
Phosphorus	ppm	ASTM D5185m 1150	<b>965</b>	1070	1009
Zinc	ppm	ASTM D5185m 1270	<b>1261</b>	1282	1199
Sulfur	ppm	ASTM D5185m 2060	<b>3037</b>	3140	3441

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	4
Sodium	ppm	ASTM D5185m	<b>0</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.6</b>	7.6	6.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	19.2	18.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	15.3	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.1</b>	7.9	8.4







# OIL ANALYSIS REPORT

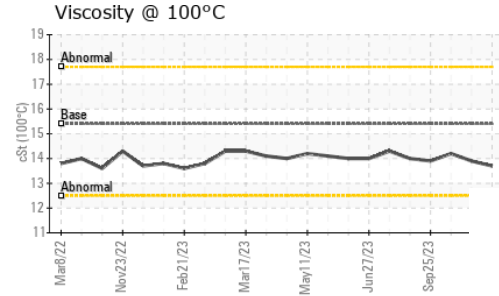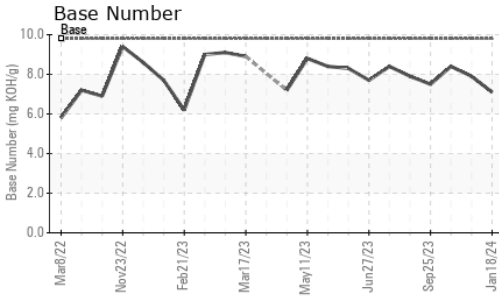

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.9	14.2

## GRAPHS

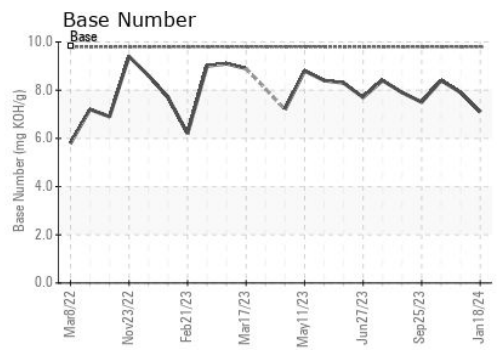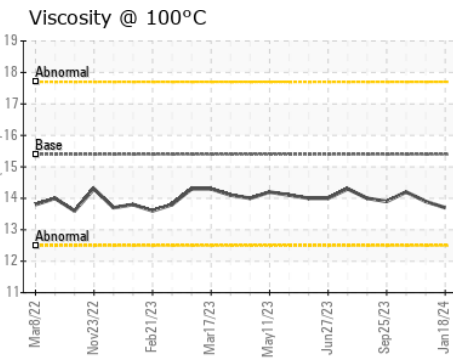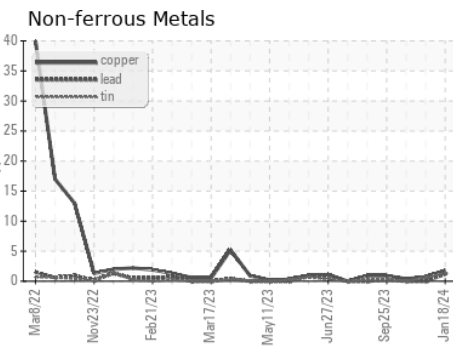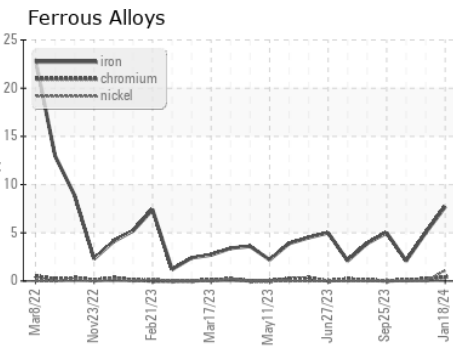

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110610 **Received** : 23 Jan 2024  
**Lab Number** : **06068223** **Diagnosed** : 23 Jan 2024  
**Unique Number** : 10844900 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: DARRIN WRIGHT  
 darrin.wright@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)