




OIL ANALYSIS REPORT

Sample Rating Trend

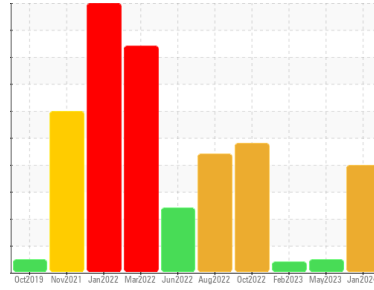

Machine Id
726045-310072
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0100556	GFL0083458	GFL0065203
Sample Date	Client Info	17 Jan 2024	23 May 2023	13 Feb 2023
Machine Age	mls	Client Info	175646	19024
Oil Age	mls	Client Info	175646	0
Oil Changed	Client Info	Not Chngd	Changed	Changed
Sample Status		ABNORMAL	NORMAL	ATTENTION

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	1.3
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	22	40	28
Chromium	ppm ASTM D5185m >5	1	2	<1
Nickel	ppm ASTM D5185m >2	0	1	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	<1	0
Aluminum	ppm ASTM D5185m >30	2	4	<1
Lead	ppm ASTM D5185m >30	<1	<1	0
Copper	ppm ASTM D5185m >150	11	1	2
Tin	ppm ASTM D5185m >5	0	1	<1
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	3	4	53
Barium	ppm ASTM D5185m 0	0	2	12
Molybdenum	ppm ASTM D5185m 60	79	55	51
Manganese	ppm ASTM D5185m 0	<1	1	1
Magnesium	ppm ASTM D5185m 1010	1028	899	478
Calcium	ppm ASTM D5185m 1070	1146	1086	1596
Phosphorus	ppm ASTM D5185m 1150	1094	1011	1045
Zinc	ppm ASTM D5185m 1270	1342	1273	1208
Sulfur	ppm ASTM D5185m 2060	3295	3120	2955

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	▲ 21	7	17
Sodium	ppm ASTM D5185m	▲ 318	13	4
Potassium	ppm ASTM D5185m >20	▲ 99	4	2
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.4	0.9	0.6
Nitration	Abs/cm *ASTM D7624 >20	8.8	11.0	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	22.6	21.1	23.8


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.2	19.1	21.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.4	8.4	11.1




OIL ANALYSIS REPORT


▲ Silicon (ppm)

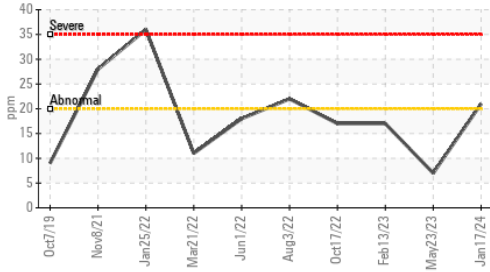


Glycol Contamination

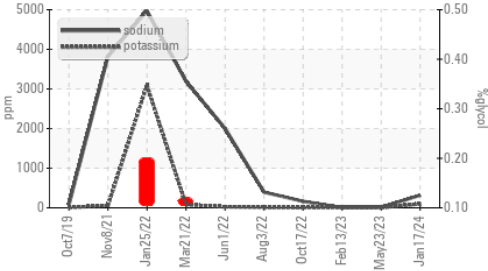

Viscosity @ 100°C

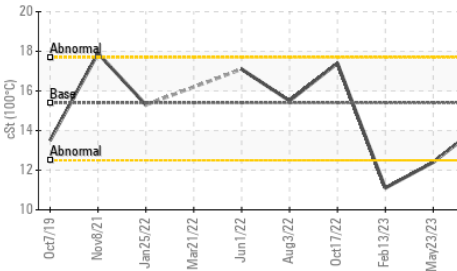

Glycol Contamination

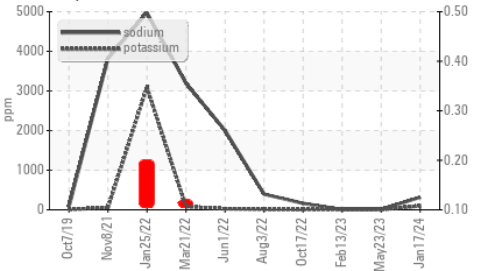

VISUAL


method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG
Free Water	scalar *Visual		NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.4	14.3	12.4 ▲ 11.1

GRAPHS


Ferrous Alloys

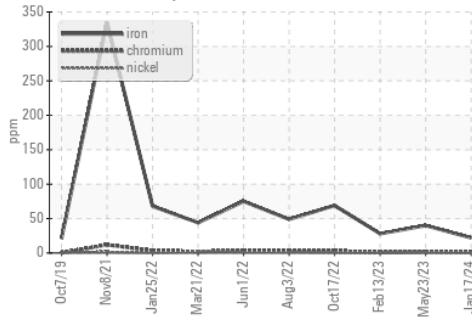


Non-ferrous Metals

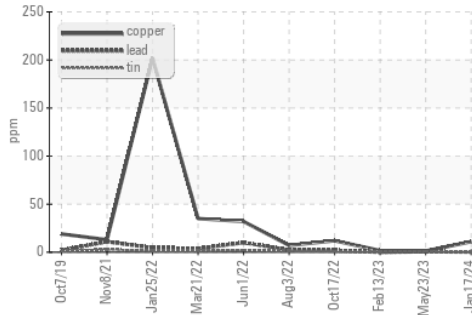

Viscosity @ 100°C

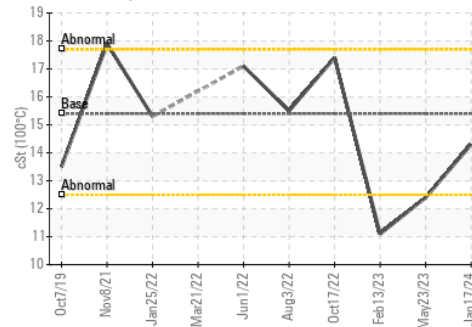

Base Number

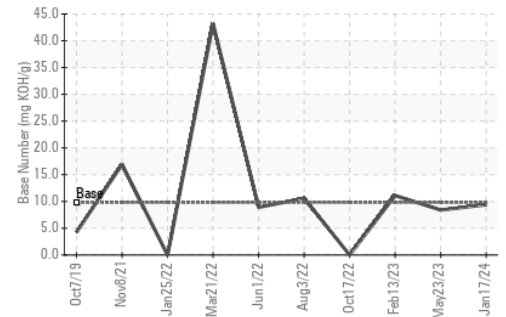

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0100556 **Received** : 23 Jan 2024
Lab Number : 06068922 **Diagnosed** : 26 Jan 2024
Unique Number : 10845599 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Saul Castillo
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: