




OIL ANALYSIS REPORT

Sample Rating Trend

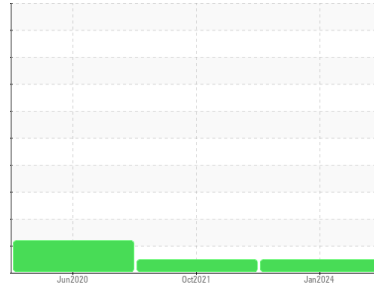

NORMAL



Machine Id
520021-651121

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0100558	GFL0030839	GFLH-443165
Sample Date	Client Info		17 Jan 2024	13 Oct 2021	04 Jun 2020
Machine Age	mls	Client Info	647889	29364	29364
Oil Age	mls	Client Info	647889	29364	450
Oil Changed	Client Info		Not Chngd	N/A	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	▲ 3.9
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	12	2	7
Chromium	ppm	ASTM D5185m >5	2	<1	0
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	2	2	4
Lead	ppm	ASTM D5185m >30	1	2	0
Copper	ppm	ASTM D5185m >150	<1	<1	1
Tin	ppm	ASTM D5185m >5	0	0	0
Antimony	ppm	ASTM D5185m	---	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	5	59	317
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	58	20	129
Manganese	ppm	ASTM D5185m 0	<1	<1	0
Magnesium	ppm	ASTM D5185m 1010	1027	140	712
Calcium	ppm	ASTM D5185m 1070	1140	2191	1656
Phosphorus	ppm	ASTM D5185m 1150	1090	823	734
Zinc	ppm	ASTM D5185m 1270	1336	959	856
Sulfur	ppm	ASTM D5185m 2060	3357	4743	---
Lithium	ppm	ASTM D5185m	---	---	0

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	3	5	6
Sodium	ppm	ASTM D5185m	1	1	6
Potassium	ppm	ASTM D5185m >20	0	9	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	4.9	5.2	8
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.7	16.2	---



OIL ANALYSIS REPORT



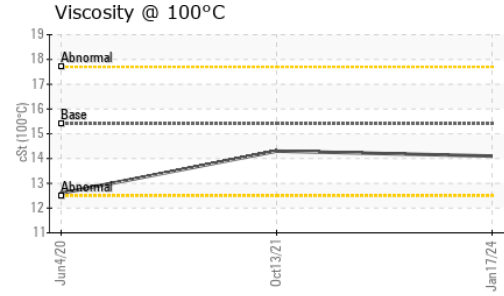
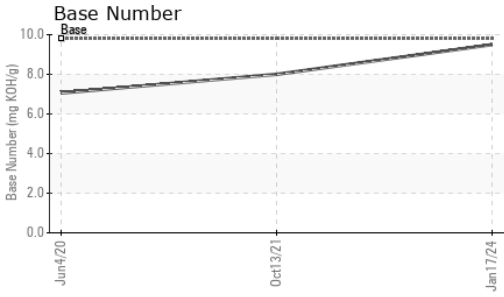


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414	>25	12.7	9.4	14
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.5	8	7.06

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.3	▲ 12.6

GRAPHS

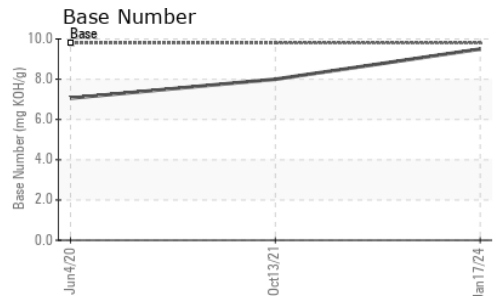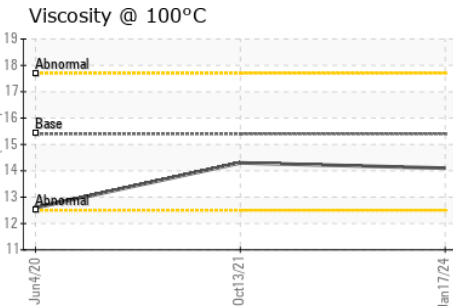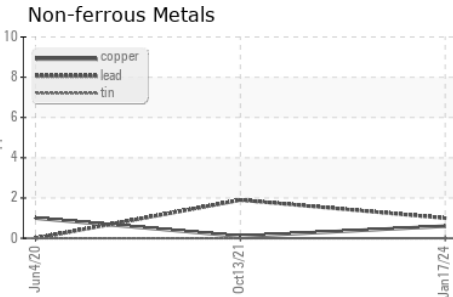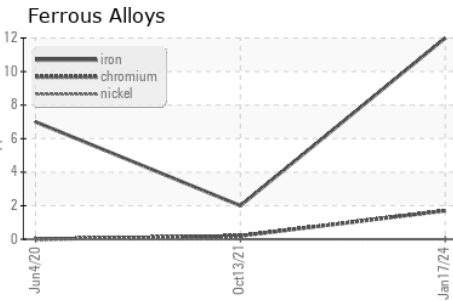

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0100558 **Received** : 23 Jan 2024
Lab Number : 06068931 **Diagnosed** : 24 Jan 2024
Unique Number : 10845608 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Saul Castillo
 saul.castillo@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)