




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

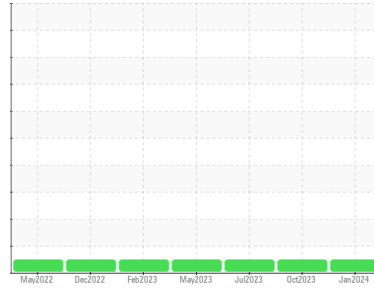

Machine Id
812025

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0106105	GFL0078670	GFL0082043
Sample Date	Client Info	22 Jan 2024	23 Oct 2023	27 Jul 2023
Machine Age	hrs	5777	5237	4631
Oil Age	hrs	600	600	547
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	6	7	9
Chromium	ppm ASTM D5185m >4	<1	0	<1
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	1	3	4
Lead	ppm ASTM D5185m >45	<1	0	0
Copper	ppm ASTM D5185m >85	1	<1	0
Tin	ppm ASTM D5185m >4	0	0	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	3	11
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	60	61	66
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	1013	930	998
Calcium	ppm ASTM D5185m 1070	1116	1013	1240
Phosphorus	ppm ASTM D5185m 1150	1056	941	1073
Zinc	ppm ASTM D5185m 1270	1321	1251	1377
Sulfur	ppm ASTM D5185m 2060	3159	2763	3668

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	3	2	2
Sodium	ppm ASTM D5185m	2	1	<1
Potassium	ppm ASTM D5185m >20	0	8	5

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	7.2	7.6	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	18.7	18.8	19.2

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.5	14.5	14.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.8	7.7	8.0







OIL ANALYSIS REPORT

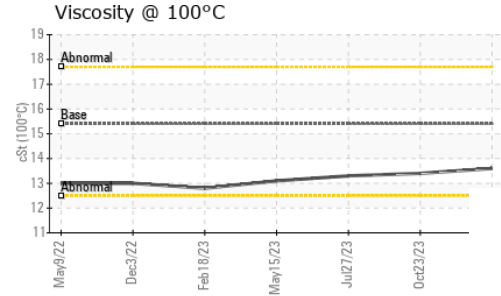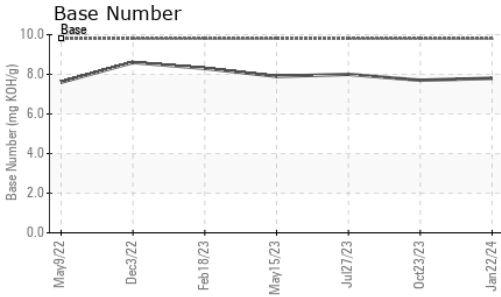

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.4	13.3

GRAPHS

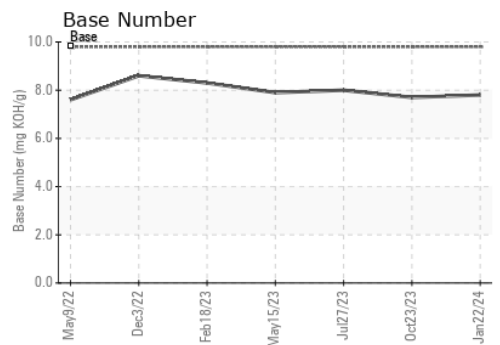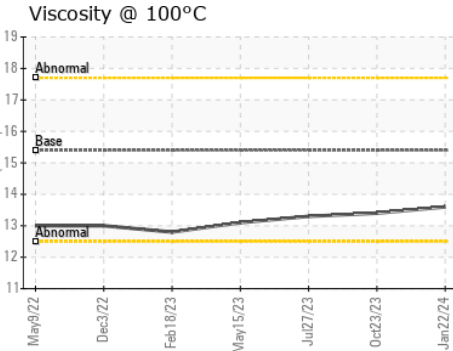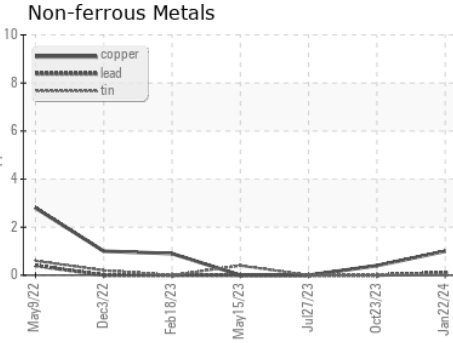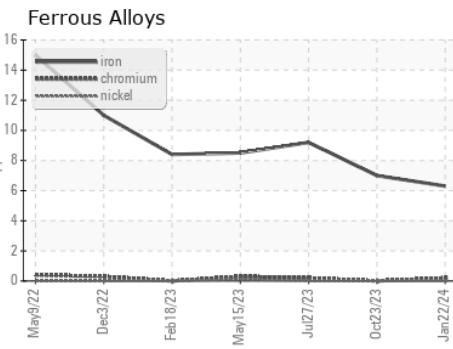

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0106105 **Received** : 23 Jan 2024
 Lab Number : **06068936** **Diagnosed** : 24 Jan 2024
 Unique Number : 10845613 **Diagnostician** : Wes Davis
 Test Package : FLEET

GFL Environmental - 152 - Jacksonville
 7580 PHILIPS HWY
 Jacksonville, FL
 US 32256
 Contact: GRANVILLE CARROLL
 gcarroll@gflenv.com
 T: 1(904)252-6815
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)