



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**KENWORTH 413125**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>GFL0095388</b>  | ---      | ---      |
| Sample Date   | Client Info     | <b>04 Jan 2024</b> | ---      | ---      |
| Machine Age   | hrs Client Info | <b>2288</b>        | ---      | ---      |
| Oil Age       | hrs Client Info | <b>600</b>         | ---      | ---      |
| Oil Changed   | Client Info     | <b>Changed</b>     | ---      | ---      |
| Sample Status |                 | <b>NORMAL</b>      | ---      | ---      |

## CONTAMINATION

| method | limit/base     | current        | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel   | WC Method >5   | <b>&lt;1.0</b> | ---      | ---      |
| Water  | WC Method >0.2 | <b>NEG</b>     | ---      | ---      |
| Glycol | WC Method      | <b>NEG</b>     | ---      | ---      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >100 | <b>8</b>     | ---      | ---      |
| Chromium | ppm ASTM D5185m >20  | <b>&lt;1</b> | ---      | ---      |
| Nickel   | ppm ASTM D5185m >4   | <b>0</b>     | ---      | ---      |
| Titanium | ppm ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm ASTM D5185m >20  | <b>1</b>     | ---      | ---      |
| Lead     | ppm ASTM D5185m >40  | <b>0</b>     | ---      | ---      |
| Copper   | ppm ASTM D5185m >330 | <b>1</b>     | ---      | ---      |
| Tin      | ppm ASTM D5185m >15  | <b>&lt;1</b> | ---      | ---      |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>0</b>     | ---      | ---      |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm ASTM D5185m 60   | <b>58</b>    | ---      | ---      |
| Manganese  | ppm ASTM D5185m 0    | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm ASTM D5185m 1010 | <b>27</b>    | ---      | ---      |
| Calcium    | ppm ASTM D5185m 1070 | <b>2267</b>  | ---      | ---      |
| Phosphorus | ppm ASTM D5185m 1150 | <b>1004</b>  | ---      | ---      |
| Zinc       | ppm ASTM D5185m 1270 | <b>1236</b>  | ---      | ---      |
| Sulfur     | ppm ASTM D5185m 2060 | <b>3202</b>  | ---      | ---      |

## CONTAMINANTS

| method    | limit/base          | current  | history1 | history2 |
|-----------|---------------------|----------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>9</b> | ---      | ---      |
| Sodium    | ppm ASTM D5185m     | <b>0</b> | ---      | ---      |
| Potassium | ppm ASTM D5185m >20 | <b>2</b> | ---      | ---      |

## INFRA-RED



| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>0.1</b>  | ---      | ---      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>8.0</b>  | ---      | ---      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>17.5</b> | ---      | ---      |

## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>10.4</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>7.0</b>  | ---      | ---      |







# OIL ANALYSIS REPORT

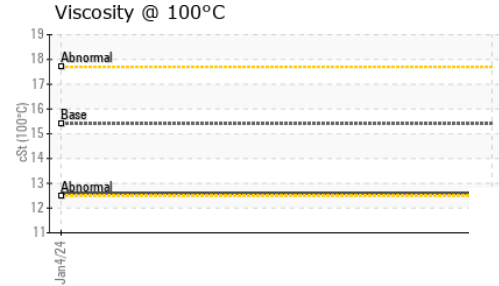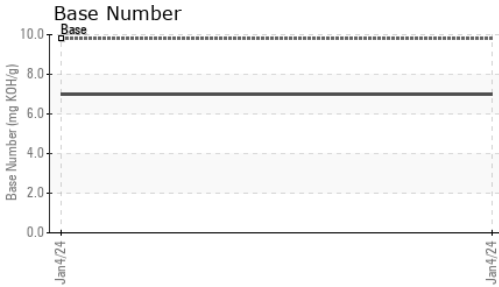

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 12.6     | ---      |

## GRAPHS

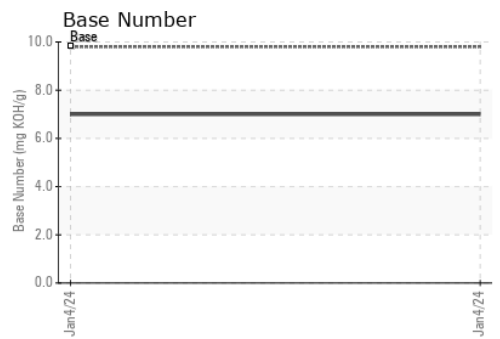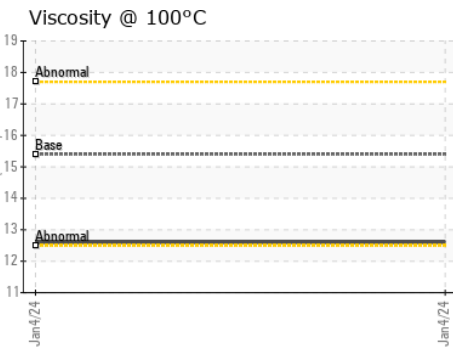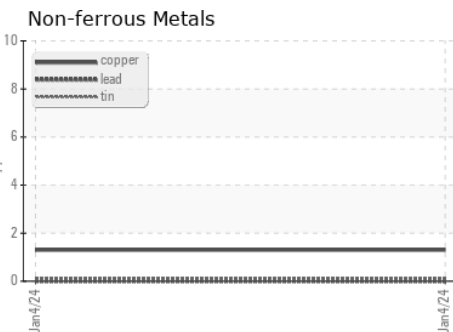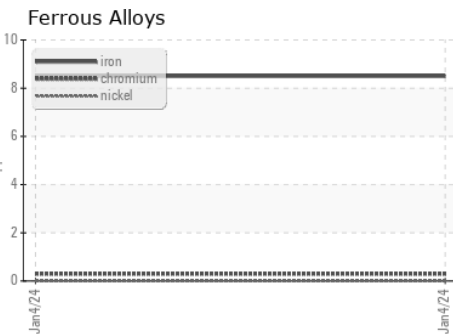

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095388 **Received** : 24 Jan 2024  
**Lab Number** : 06069349 **Diagnosed** : 26 Jan 2024  
**Unique Number** : 10846026 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 982 - Texas City Hauling**  
 1004 4th Ave S  
 Texas City, TX  
 US 77590  
 Contact: COLLIN FERNANDEZ  
 cfernandez@gflenv.com  
 T: (832)920-9305  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)