




# OIL ANALYSIS REPORT

Sample Rating Trend

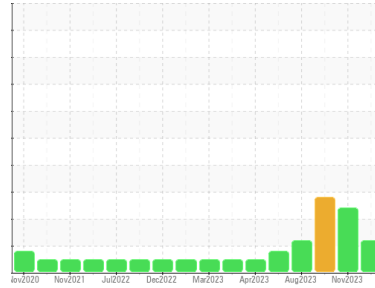

FUEL



Machine Id  
**820020-101305**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0105561</b>	GFL0087072	GFL0101121
Sample Date	Client Info	<b>08 Jan 2024</b>	23 Nov 2023	09 Nov 2023
Machine Age	hrs	<b>0</b>	0	150
Oil Age	hrs	<b>0</b>	0	600
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>ABNORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>33</b>	15	25
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	3
Copper	ppm ASTM D5185m >330	<b>1</b>	1	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	5	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	54	50
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>870</b>	855	700
Calcium	ppm ASTM D5185m 1070	<b>1056</b>	990	934
Phosphorus	ppm ASTM D5185m 1150	<b>946</b>	923	820
Zinc	ppm ASTM D5185m 1270	<b>1160</b>	1133	987
Sulfur	ppm ASTM D5185m 2060	<b>2917</b>	2573	2328

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	5	4
Sodium	ppm ASTM D5185m	<b>0</b>	2	42
Potassium	ppm ASTM D5185m >20	<b>2</b>	1	4
Fuel	% ASTM D3524 >5	<b>▲ 5.8</b>	◆ 9.5	◆ 19.4

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.4	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>12.9</b>	9.3	13.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.3</b>	20.6	23.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>24.2</b>	19.2	23.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.7</b>	7.7	6.1







# OIL ANALYSIS REPORT

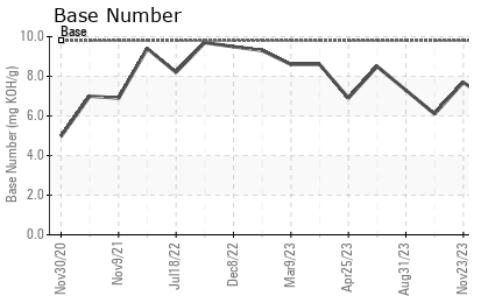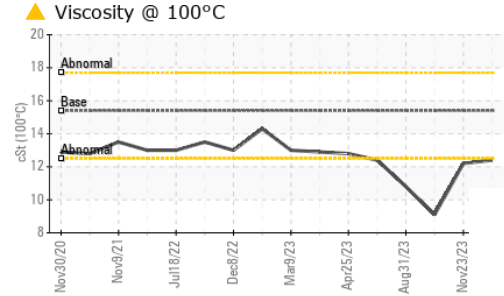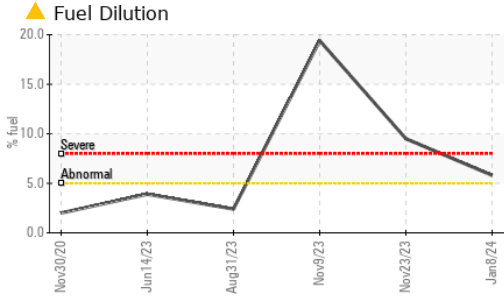

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 12.4	▲ 12.2	● 9.1

## GRAPHS

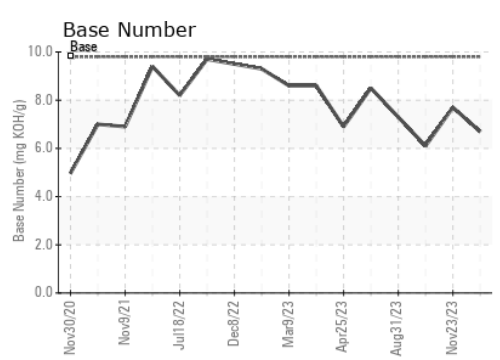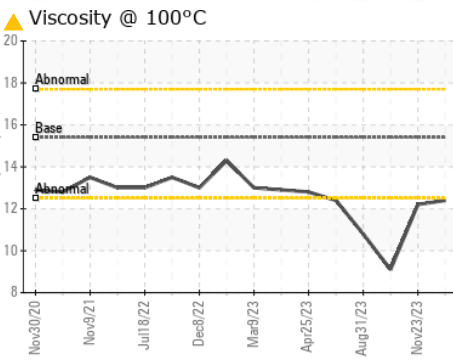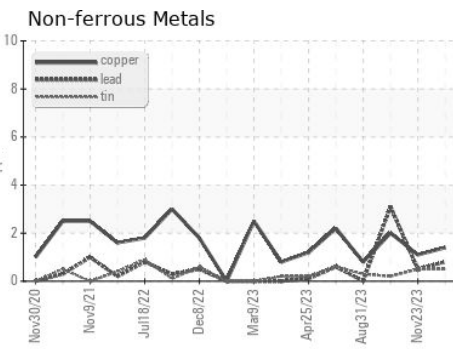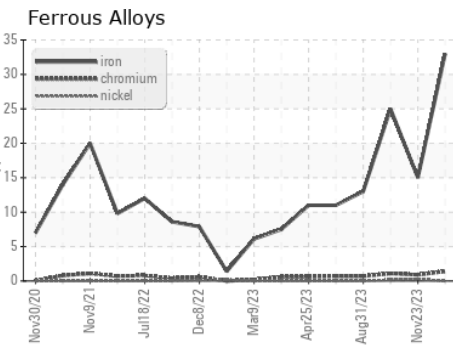

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105561 **Received** : 24 Jan 2024  
**Lab Number** : 06069367 **Diagnosed** : 25 Jan 2024  
**Unique Number** : 10846044 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 846 - Mayfield Hauling**  
 3426 State Route 45  
 Mayfield, KY  
 US 42066  
 Contact: Jack Lindsey  
 jack.lindsey@gflenv.com  
 T: (270)970-3690  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)