




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

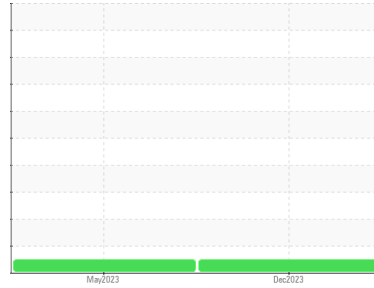

Machine Id  
**MACK 529105-SW7929**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC ELITE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095488</b>	GFL0077245	---
Sample Date	Client Info		<b>18 Dec 2023</b>	15 May 2023	---
Machine Age	hrs	Client Info	<b>8422</b>	7935	---
Oil Age	hrs	Client Info	<b>500</b>	1684	---
Oil Changed	Client Info		<b>Changed</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>5</b>	10	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	<1	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>4</b>	8	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>63</b>	33	---
Barium	ppm	ASTM D5185m	<b>7</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>99</b>	41	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>621</b>	482	---
Calcium	ppm	ASTM D5185m	<b>1218</b>	1552	---
Phosphorus	ppm	ASTM D5185m	<b>713</b>	726	---
Zinc	ppm	ASTM D5185m	<b>788</b>	877	---
Sulfur	ppm	ASTM D5185m	<b>2949</b>	2691	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	---
Sodium	ppm	ASTM D5185m	<b>2</b>	6	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	8.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	22.6	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.9</b>	21.1	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>6.4</b>	9.2	---







# OIL ANALYSIS REPORT

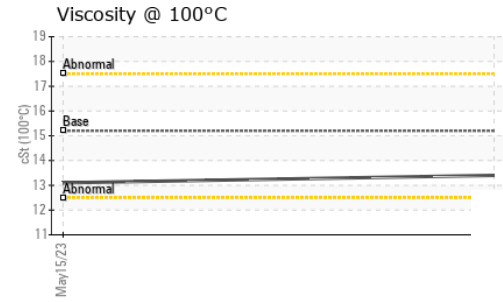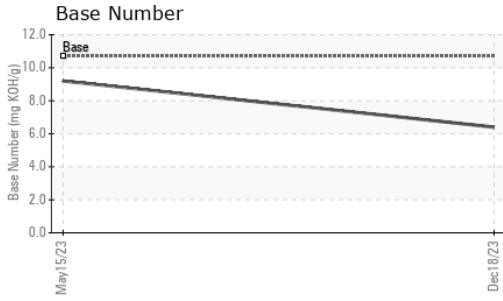

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.2	13.4	13.1

## GRAPHS

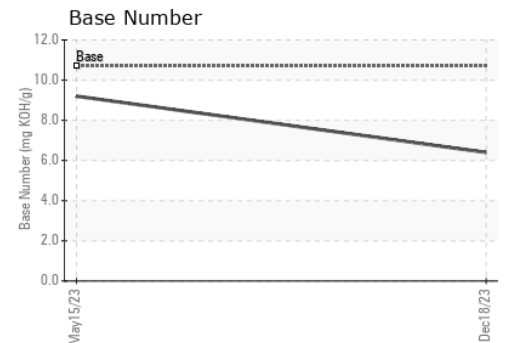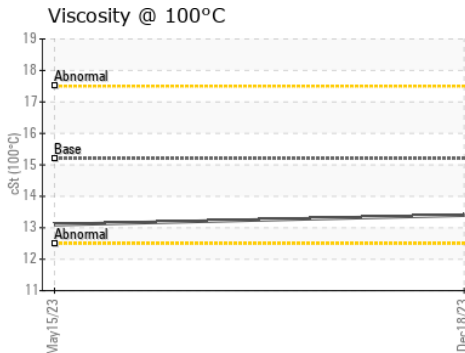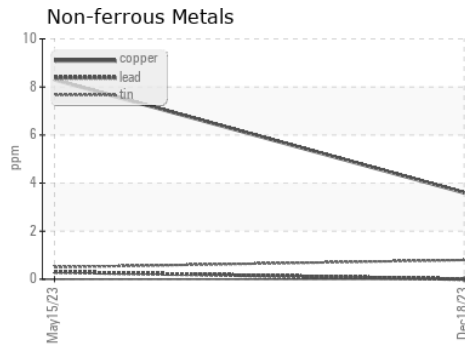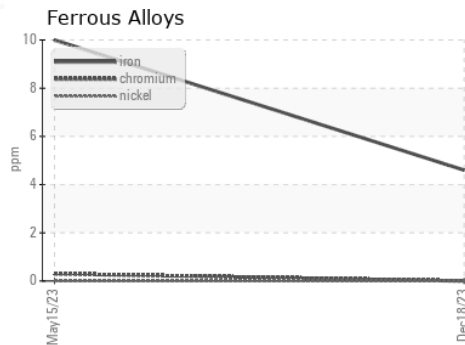

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0095488      **Received** : 24 Jan 2024  
 Lab Number : **06069846**      **Diagnosed** : 26 Jan 2024  
 Unique Number : 10846523      **Diagnostician** : Don Baldrige  
 Test Package : FLEET

GFL Environmental - 981 - Port Arthur Hauling  
 1000 S Business Park Dr  
 Port Arthur, TX  
 US 77640  
 Contact: MICHAEL KAY  
 mkay@gflenv.com  
 T: (336)660-9331  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)