


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / HULBERT**  
Machine Id  
**WL068**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

Sample Rating Trend

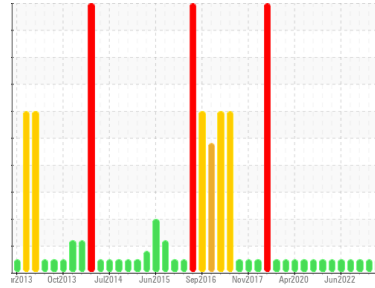

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0086816</b>	PCA0086091	PCA0086440
Sample Date	Client Info		<b>05 Jan 2024</b>	19 Oct 2023	05 Jul 2023
Machine Age	hrs	Client Info	<b>24725</b>	23854	23571
Oil Age	hrs	Client Info	<b>24442</b>	23854	23571
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>21</b>	25	41
Chromium	ppm	ASTM D5185m >20	<b>0</b>	1	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>4</b>	4	12
Copper	ppm	ASTM D5185m >330	<b>15</b>	7	29
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	57	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>978</b>	904	964
Calcium	ppm	ASTM D5185m 1070	<b>1076</b>	1063	1079
Phosphorus	ppm	ASTM D5185m 1150	<b>1034</b>	989	1046
Zinc	ppm	ASTM D5185m 1270	<b>1184</b>	1222	1304
Sulfur	ppm	ASTM D5185m 2060	<b>2920</b>	2864	3500

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	6	6
Sodium	ppm	ASTM D5185m	<b>36</b>	8	8
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.9	1.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	6.5	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.3</b>	18.3	22.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	13.0	18.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	7.5	8.4









# OIL ANALYSIS REPORT

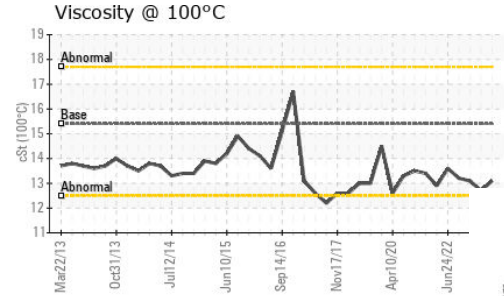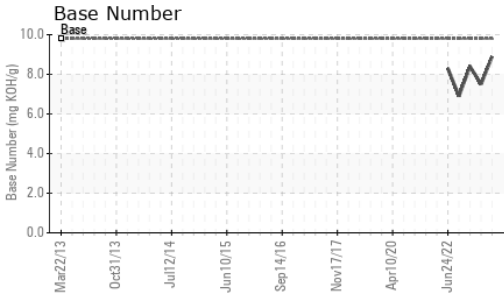

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	12.7	13.1

## GRAPHS

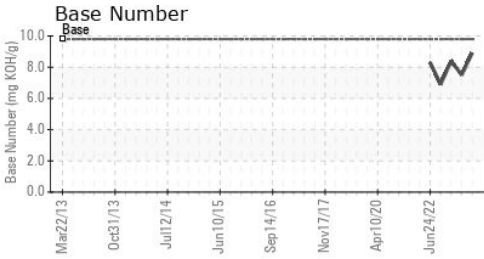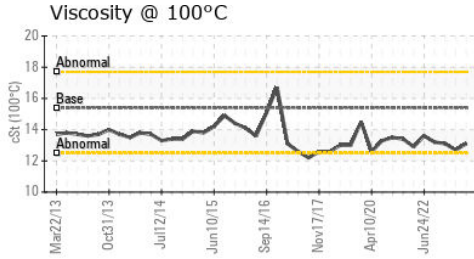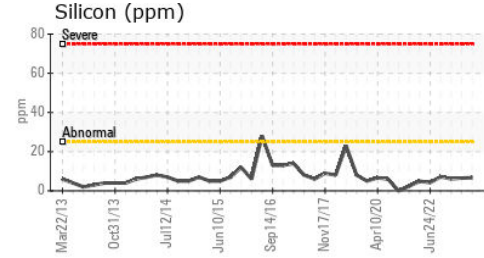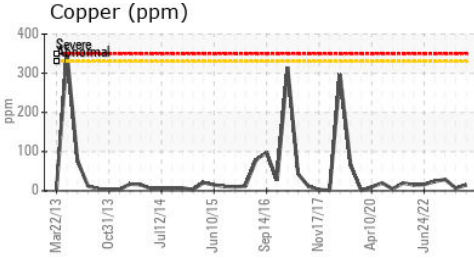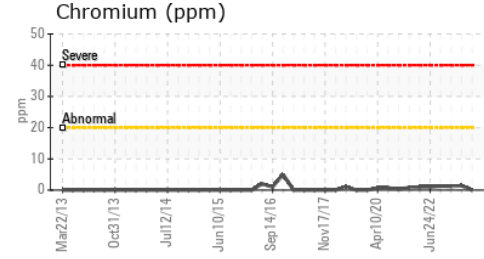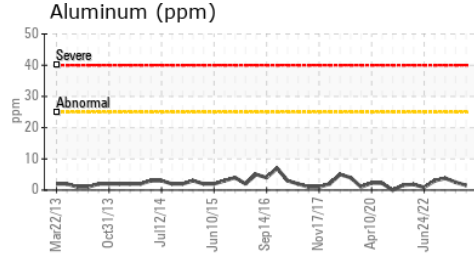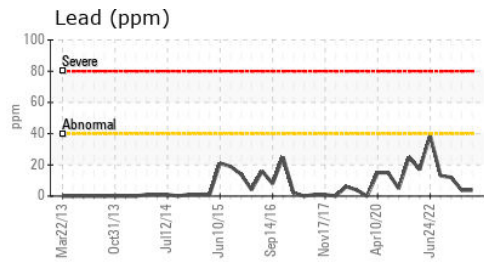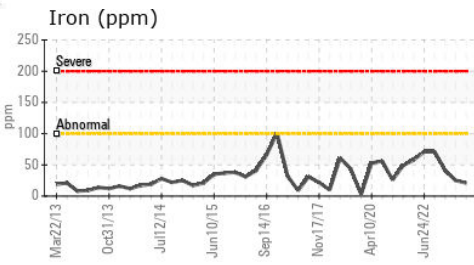

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086816 **Recieved** : 24 Jan 2024  
**Lab Number** : 06069860 **Diagnosed** : 25 Jan 2024  
**Unique Number** : 10846537 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441  
 Contact:  
 hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: