




OIL ANALYSIS REPORT

Sample Rating Trend

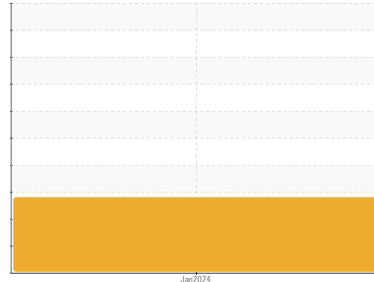

DIRT



Machine Id
914044

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

▲ Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110174	---	---
Sample Date	Client Info	22 Jan 2024	---	---
Machine Age	hrs	560	---	---
Oil Age	hrs	560	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---
Glycol	WC Method		NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>110	36	---
Chromium	ppm	ASTM D5185m	>4	1	---
Nickel	ppm	ASTM D5185m	>2	7	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>2	<1	---
Aluminum	ppm	ASTM D5185m	>25	5	---
Lead	ppm	ASTM D5185m	>45	1	---
Copper	ppm	ASTM D5185m	>85	▲ 131	---
Tin	ppm	ASTM D5185m	>4	3	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	190	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	60	103	---
Manganese	ppm	ASTM D5185m	0	4	---
Magnesium	ppm	ASTM D5185m	1010	665	---
Calcium	ppm	ASTM D5185m	1070	1342	---
Phosphorus	ppm	ASTM D5185m	1150	674	---
Zinc	ppm	ASTM D5185m	1270	767	---
Sulfur	ppm	ASTM D5185m	2060	2124	---

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	▲ 78	---
Sodium	ppm	ASTM D5185m		4	---
Potassium	ppm	ASTM D5185m	>20	6	---
Fuel	%	ASTM D3524	>5	0.4	---

INFRA-RED






method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.4	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.5	---







OIL ANALYSIS REPORT

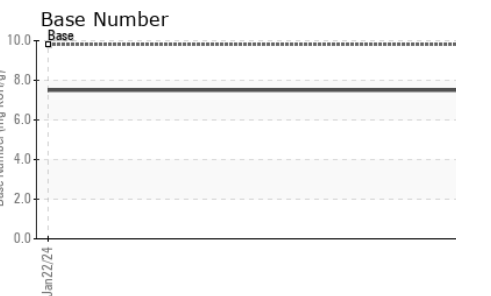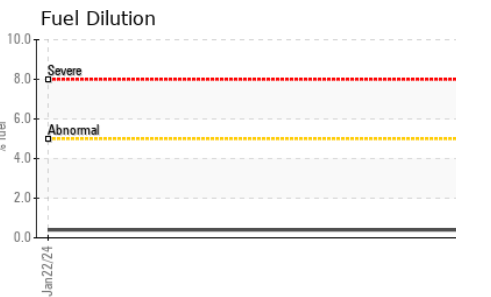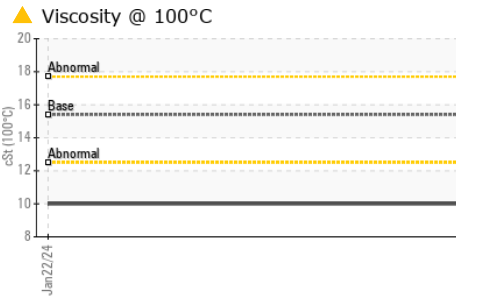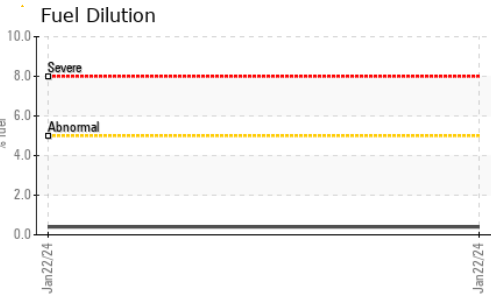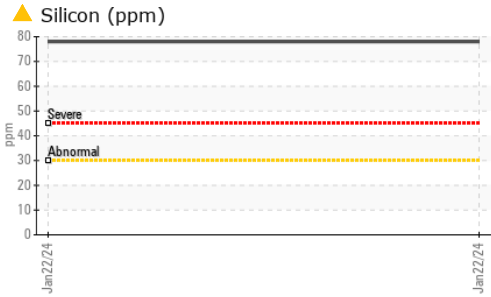

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.0	---

GRAPHS

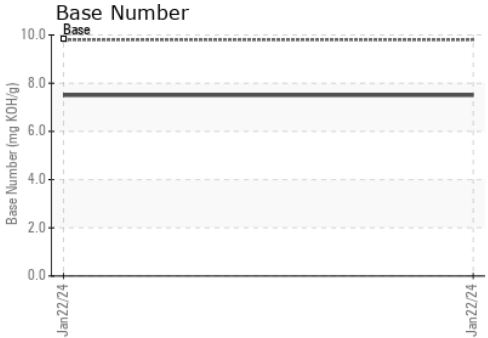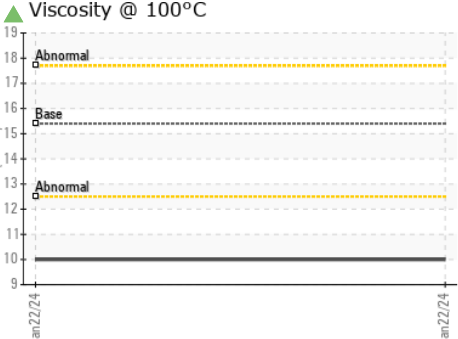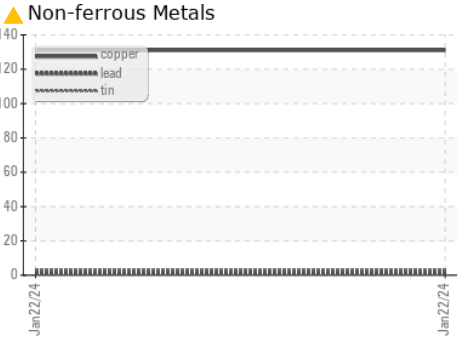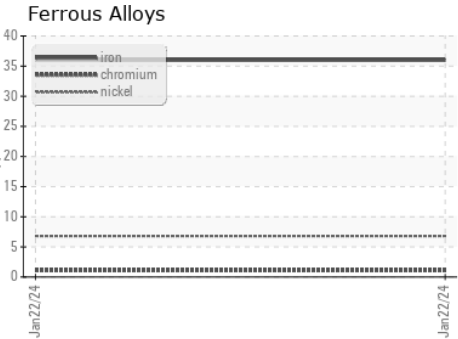

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110174 **Recieved** : 24 Jan 2024
Lab Number : 06069892 **Diagnosed** : 26 Jan 2024
Unique Number : 10846569 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 660 - Lynchburg Hauling
 2410 Mayflower Drive
 Lynchburg, VA
 US 24501
 Contact: Delbert Beasley
 dbeasley@countyrecycling.net
 T: (434)665-5998
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)