




# OIL ANALYSIS REPORT

## Sample Rating Trend

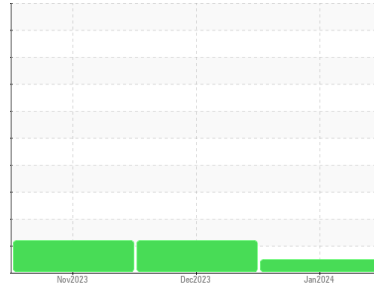

**NORMAL**



Machine Id  
**834094**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108162</b>	GFL0102477	GFL0102537
Sample Date	Client Info	<b>17 Jan 2024</b>	20 Dec 2023	25 Nov 2023
Machine Age	hrs	Client Info	285	139
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	ABNORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>46</b>	48	42
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>18</b>	13	9
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	0
Copper	ppm ASTM D5185m >330	<b>16</b>	16	16
Tin	ppm ASTM D5185m >15	<b>2</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>15</b>	32	47
Barium	ppm ASTM D5185m 0	<b>2</b>	2	9
Molybdenum	ppm ASTM D5185m 60	<b>50</b>	57	56
Manganese	ppm ASTM D5185m 0	<b>12</b>	13	12
Magnesium	ppm ASTM D5185m 1010	<b>705</b>	821	694
Calcium	ppm ASTM D5185m 1070	<b>1126</b>	1169	1144
Phosphorus	ppm ASTM D5185m 1150	<b>609</b>	820	717
Zinc	ppm ASTM D5185m 1270	<b>803</b>	977	847
Sulfur	ppm ASTM D5185m 2060	<b>1989</b>	2596	2510

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>30</b>	35	34
Sodium	ppm ASTM D5185m	<b>5</b>	6	8
Potassium	ppm ASTM D5185m >20	<b>77</b>	▲ 60	▲ 58
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

### INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0</b>	0.1	0
Nitration	Abs/cm *ASTM D7624 >20	<b>11.8</b>	10.5	8.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.1</b>	20.4	20.2

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.7</b>	18.0	17.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>4.0</b>	6.8	8.1







# OIL ANALYSIS REPORT

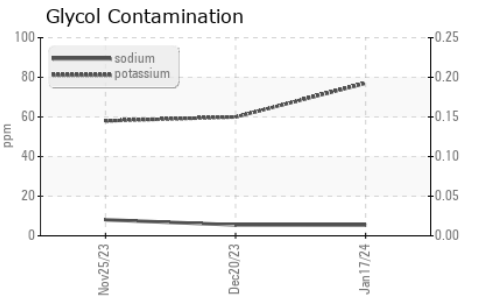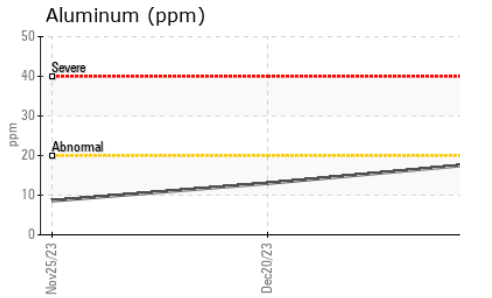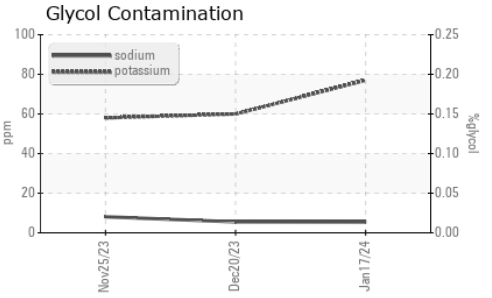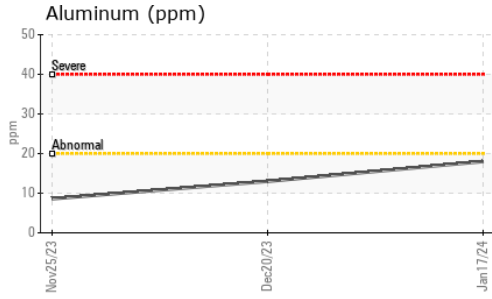

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	13.8

## GRAPHS

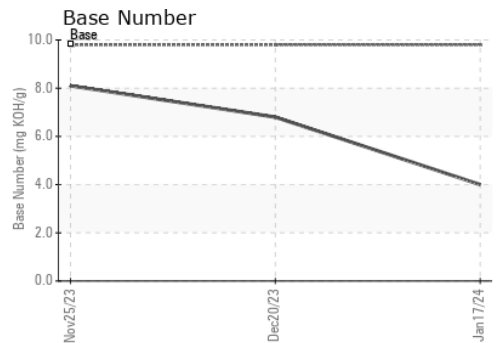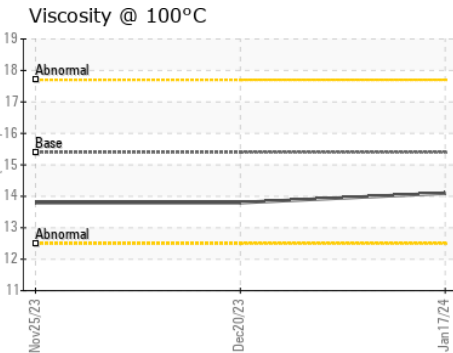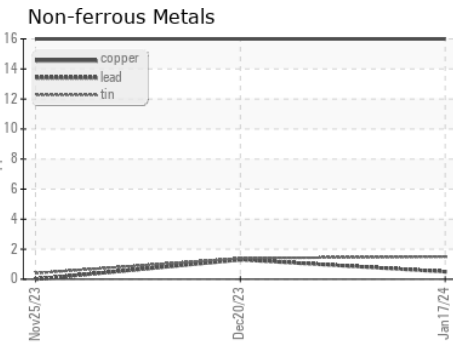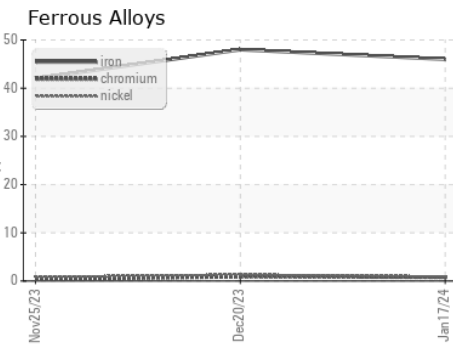

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0108162      Recieved : 24 Jan 2024  
 Lab Number : 06069935      Diagnosed : 26 Jan 2024  
 Unique Number : 10846612      Diagnostician : Don Baldrige  
 Test Package : FLEET ( Additional Tests: Glycol )

GFL Environmental - 837 - Harrison TS  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: BRYAN SWANSON  
 bryanswanson@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: