




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

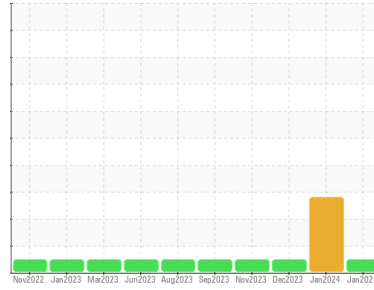

Machine Id
719005

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110997	GFL0103471	GFL0100432
Sample Date	Client Info	20 Jan 2024	08 Jan 2024	05 Dec 2023
Machine Age	hrs	1642	1595	1432
Oil Age	hrs	340	330	167
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	21	45	12
Chromium	ppm ASTM D5185m >20	<1	<1	0
Nickel	ppm ASTM D5185m >4	0	1	0
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	7	1
Lead	ppm ASTM D5185m >40	0	1	0
Copper	ppm ASTM D5185m >330	<1	5	<1
Tin	ppm ASTM D5185m >15	0	<1	0
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	26	17	38
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	93	49	95
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 1010	841	679	895
Calcium	ppm ASTM D5185m 1070	992	850	1033
Phosphorus	ppm ASTM D5185m 1150	946	799	946
Zinc	ppm ASTM D5185m 1270	1134	919	1176
Sulfur	ppm ASTM D5185m 2060	2629	3036	3165

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	15	3
Sodium	ppm ASTM D5185m	0	8	<1
Potassium	ppm ASTM D5185m >20	11	3	12
Fuel	% ASTM D3524 >5	0.8	9.7	<1.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.7	0.4	0.2
Nitration	Abs/cm *ASTM D7624 >20	8.2	7.5	5.8
Sulfation	Abs/.1mm *ASTM D7415 >30	19.4	21.0	18.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.4	18.7	13.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.0	7.1	8.8







OIL ANALYSIS REPORT

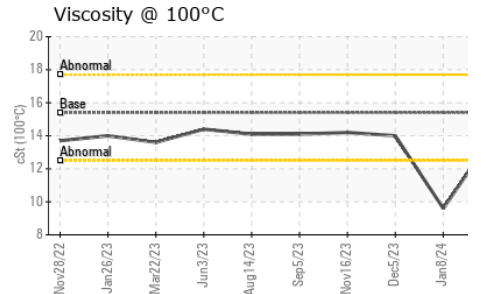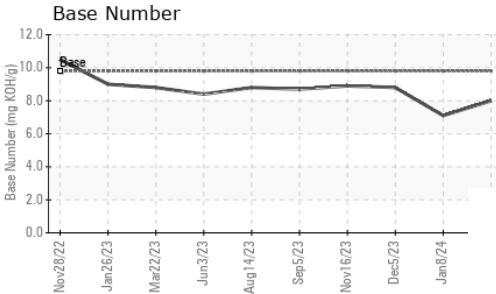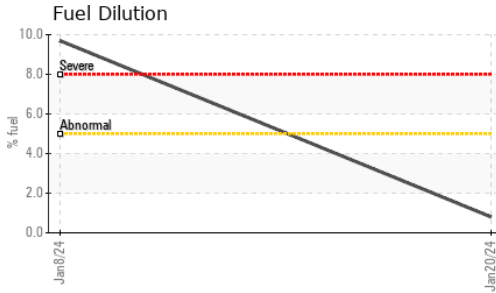

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	9.6	14.0

GRAPHS

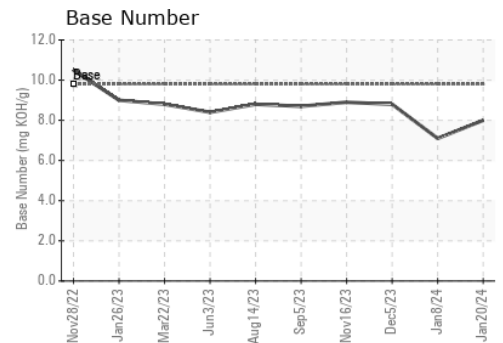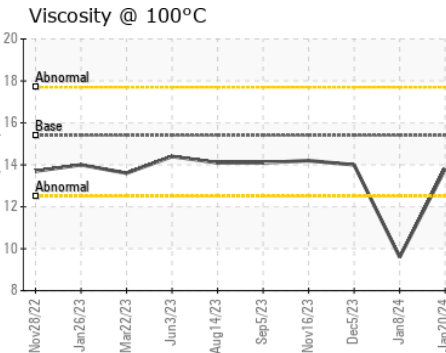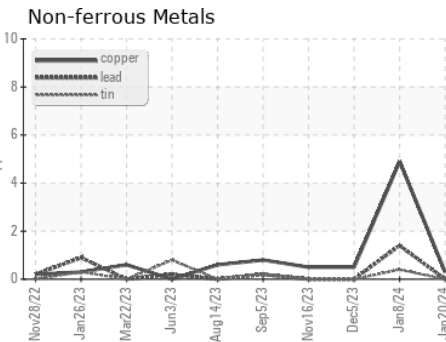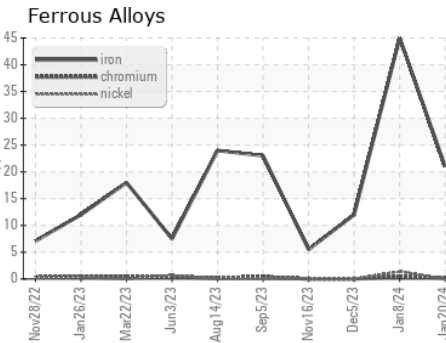

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110997 **Received** : 25 Jan 2024
Lab Number : 06070221 **Diagnosed** : 29 Jan 2024
Unique Number : 10846898 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)
 13737 Plant Rd
 Childersburg, AL
 US 35044
 Contact: JONATHAN WILLIAMS
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: