


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

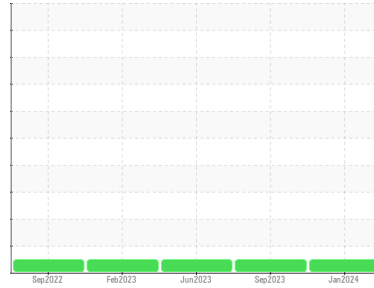

Area
FLEET
 Machine Id
VOLVO 2126940 (S/N 4V4NC9EH9NN603205)
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0113701	PCA0099313	PCA0095986
Sample Date	Client Info			18 Jan 2024	05 Sep 2023	01 Jun 2023
Machine Age	mls	Client Info		123347	104560	83872
Oil Age	mls	Client Info		48446	20688	57212
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	31	22	34
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	4	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>25	4	2	8
Lead	ppm	ASTM D5185m	>40	2	0	3
Copper	ppm	ASTM D5185m	>330	35	27	69
Tin	ppm	ASTM D5185m	>15	2	1	3
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	1	5
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		53	57	62
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m		939	979	917
Calcium	ppm	ASTM D5185m		1065	1077	1104
Phosphorus	ppm	ASTM D5185m		905	1014	847
Zinc	ppm	ASTM D5185m		1133	1281	1214
Sulfur	ppm	ASTM D5185m		2606	3495	3043

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	7	9
Sodium	ppm	ASTM D5185m		<1	3	3
Potassium	ppm	ASTM D5185m	>20	8	9	24
Fuel	%	ASTM D3524	>6.0	<1.0	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	10.1	8.6	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	20.0	22.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	15.2	19.6
Base Number (BN)	mg KOH/g	ASTM D2896		6.2	8.0	5.5





OIL ANALYSIS REPORT

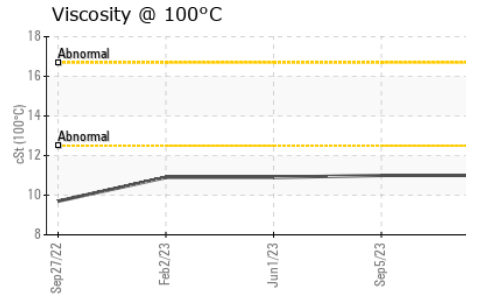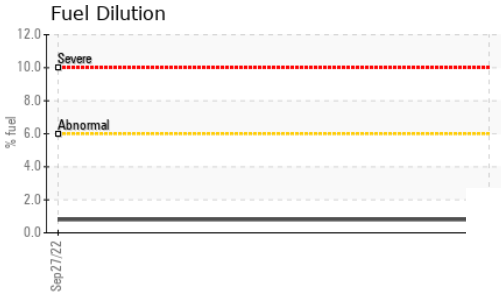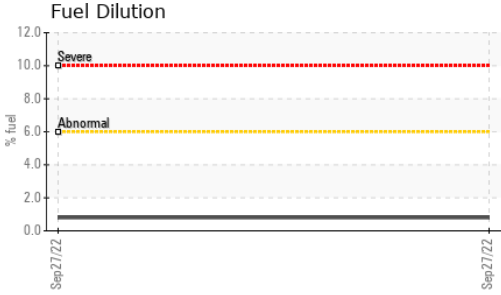

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.0	11.0	10.9

GRAPHS

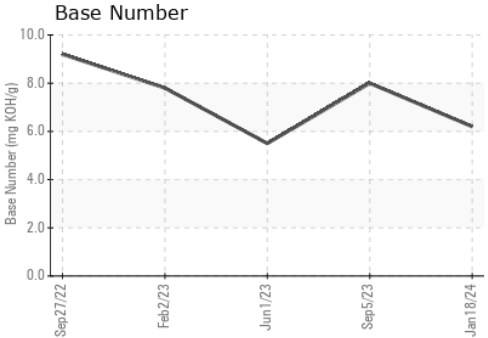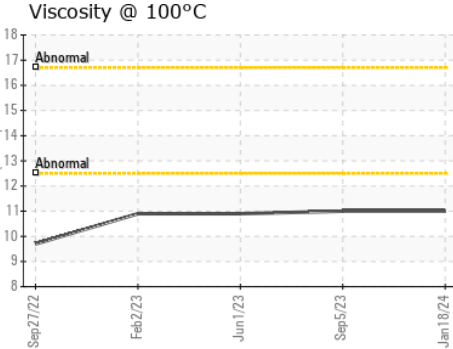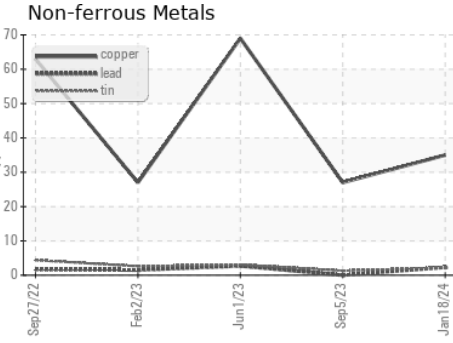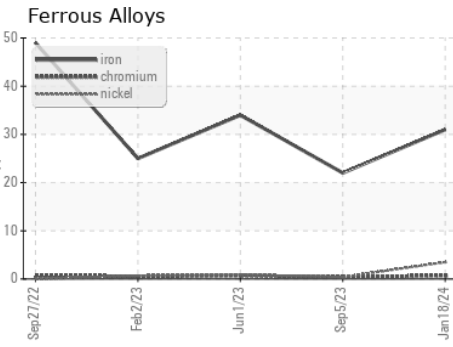

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113701 **Received** : 25 Jan 2024
Lab Number : **06070301** **Diagnosed** : 25 Jan 2024
Unique Number : 10846978 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

PERDUE FARMS - ACCOMAC
 22520 LANKFORD HWY
 ACCOMAC, VA
 US 23301
 Contact: PEGGY KIMES
 peggy.kimes@perdue.com
 T: (757)787-5304
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)