


# **OIL ANALYSIS REPORT**

# MIX ROOM C [98694392] KR-GR-003112 - EAST DUMPER (S/N MIX C - 11513062)

**Hydraulic System** 

AW HYDRAULIC OIL ISO 68 (--- GAL)





### **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. ( Customer Sample Comment: 98694392)

# Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORI   | MATION | method       | limit/base | current           | history1          | history2                |
|-----------------|--------|--------------|------------|-------------------|-------------------|-------------------------|
| Sample Number   |        | Client Info  |            | PCA0113108        | PCA0110826        | PCA0110810              |
| Sample Date     |        | Client Info  |            | 22 Jan 2024       | 29 Nov 2023       | 30 Oct 2023             |
| Machine Age     | hrs    | Client Info  |            | 0                 | 0                 | 0                       |
| Oil Age         | hrs    | Client Info  |            | 0                 | 0                 | 0                       |
| Oil Changed     |        | Client Info  |            | N/A               | N/A               | N/A                     |
| Sample Status   |        |              |            | ABNORMAL          | ABNORMAL          | ABNORMAL                |
| CONTAMINAT      | ION    | method       | limit/base | current           | history1          | history2                |
| Water           |        | WC Method    | >0.05      | NEG               | NEG               | NEG                     |
| WEAR METAL      | S      | method       | limit/base | current           | history1          | history2                |
| Iron            | ppm    | ASTM D5185m  | >20        | 10                | 2                 | 7                       |
| Chromium        | ppm    | ASTM D5185m  | >20        | 7                 | <1                | 4                       |
| Nickel          | ppm    | ASTM D5185m  | >20        | 0                 | 0                 | <1                      |
| Titanium        | ppm    | ASTM D5185m  |            | 0                 | 0                 | 0                       |
| Silver          | ppm    | ASTM D5185m  |            | 0                 | 0                 | 0                       |
| Aluminum        | ppm    | ASTM D5185m  | >20        | 3                 | 0                 | <1                      |
| Lead            | ppm    | ASTM D5185m  | >20        | 0                 | 0                 | 0                       |
| Copper          | ppm    | ASTM D5185m  | >20        | <1                | 0                 | <1                      |
| Tin             | ppm    | ASTM D5185m  | >20        | 0                 | 0                 | <1                      |
| Vanadium        | ppm    | ASTM D5185m  |            | 0                 | 0                 | 0                       |
| Cadmium         | ppm    | ASTM D5185m  |            | 0                 | 0                 | 0                       |
| ADDITIVES       |        | method       | limit/base | current           | history1          | history2                |
| Boron           | ppm    | ASTM D5185m  | 5          | 0                 | 0                 | 0                       |
| Barium          | ppm    | ASTM D5185m  | 5          | 0                 | 0                 | 20                      |
| Molybdenum      | ppm    | ASTM D5185m  | 5          | 0                 | 0                 | 0                       |
| Manganese       | ppm    | ASTM D5185m  |            | 0                 | 0                 | <1                      |
| Magnesium       | ppm    | ASTM D5185m  | 25         | 0                 | 0                 | 0                       |
| Calcium         | ppm    | ASTM D5185m  | 200        | <1                | <1                | 1                       |
| Phosphorus      | ppm    | ASTM D5185m  | 300        | 323               | 406               | 368                     |
| Zinc            | ppm    | ASTM D5185m  | 370        | 0                 | 0                 | 25                      |
| Sulfur          | ppm    | ASTM D5185m  | 2500       | 366               | 469               | 464                     |
| CONTAMINAN      | TS     | method       | limit/base | current           | history1          | history2                |
| Silicon         | ppm    | ASTM D5185m  | >15        | 1                 | 1                 | 2                       |
| Sodium          | ppm    | ASTM D5185m  |            | 3                 | 0                 | 3                       |
| Potassium       | ppm    | ASTM D5185m  | >20        | 2                 | 0                 | <1                      |
| FLUID CLEANL    | INESS  | method       | limit/base | current           | history1          | history2                |
| Particles >4µm  |        | ASTM D7647   | >5000      | <u> </u>          | <u></u> 101445    | <b>▲</b> 116467         |
| Particles >6µm  |        | ASTM D7647   | >1300      | <b>42233</b>      | <u>▲</u> 18977    | <u>\$\text{25568}\$</u> |
| Particles >14µm |        | ASTM D7647   | >160       | 84                | <u>198</u>        | <b>293</b>              |
| Particles >21µm |        | ASTM D7647   | >40        | 5                 | 33                | <u></u> 41              |
| Particles >38µm |        | ASTM D7647   | >10        | 0                 | 2                 | 1                       |
| Particles >71µm |        | ASTM D7647   | >3         | 0                 | 0                 | 1                       |
| Oil Cleanliness |        | ISO 4406 (c) | >19/17/14  | <u>4</u> 24/23/14 | <u>4</u> 24/21/15 | <u>4</u> 24/22/15       |
| FLUID DEGRAD    | OATION | method       | limit/base | current           | history1          | history2                |
|                 |        |              |            |                   |                   |                         |

Acid Number (AN)


mg KOH/g ASTM D8045 0.57

0.15

0.11



## **OIL ANALYSIS REPORT**

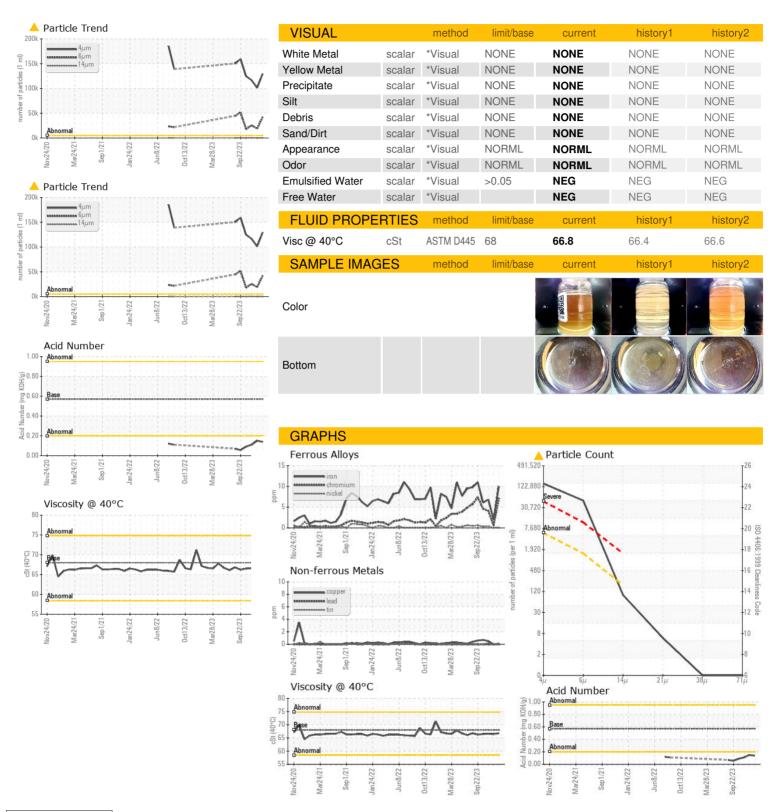





Laboratory Sample No. Lab Number **Unique Number** 

Test Package

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0113108 : 06070420

: 10847097 : IND 2

Recieved : 25 Jan 2024 : 28 Jan 2024 Diagnosed Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KraftHeinz - Kirksville - Plant 8333 PCA

2504 INDUSTRIAL DR KIRKSVILLE, MO

US 63501

Contact: WALLACE WARD wallace.ward@kraftheinzcompany.com

T: (660)627-1031

F: (660)627-5887