


OIL ANALYSIS REPORT

Sample Rating Trend







	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
	Sample Number		Client Info		GFL0082630	GFL0103029	GFL0102997
	Sample Date		Client Info		19 Jan 2024	30 Dec 2023	14 Dec 2023
	Machine Age	hrs	Client Info		2537	2414	2252
	Oil Age	hrs	Client Info		5989	5989	5989
	Oil Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	NORMAL
	CONTAMINAT		method	limit/base	current	history1	history2
	Fuel		WC Method	>5	<1.0	<1.0	<1.0
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method	20.2	NEG	NEG	NEG
	-	0				-	
	WEAR METAL	S	method	limit/base	current	history1	history2
	Iron	ppm	ASTM D5185m	>100	8	4	11
	Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
	Nickel	ppm	ASTM D5185m	>4	2	<1	<1
	Titanium	ppm	ASTM D5185m		<1	0	0
	Silver	ppm	ASTM D5185m	>3	0	0	0
	Aluminum	ppm	ASTM D5185m	>20	2	<1	2
	Lead	ppm	ASTM D5185m	>40	<1	0	<1
	Copper	ppm	ASTM D5185m	>330	1	<1	4
	Tin	ppm	ASTM D5185m	>15	<1	<1	<1
	Vanadium	ppm	ASTM D5185m		0	<1	<1
	Cadmium	ppm	ASTM D5185m		<1	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m	0	8	9	1
	Barium	ppm		0	0	0	0
		ppin	ASTM D5185m	0	•	0	0
	Molybdenum	ppm	ASTM D5185m ASTM D5185m	60	60	61	59
	Molybdenum Manganese			60			
		ppm	ASTM D5185m	60	60	61	59
	Manganese	ppm ppm	ASTM D5185m ASTM D5185m	60 0 1010	60 <1	61 <1	59 <1
	Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	60 0 1010	60 <1 926	61 <1 953	59 <1 949
	Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	60 0 1010 1070 1150	60 <1 926 1033	61 <1 953 1029	59 <1 949 979
	Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270	60 <1 926 1033 984	61 <1 953 1029 992	59 <1 949 979 918
	Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270	60 <1 926 1033 984 1182	61 <1 953 1029 992 1199	59 <1 949 979 918 1251
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270 2060 limit/base	60 <1 926 1033 984 1182 3146	61 <1 953 1029 992 1199 2915	59 <1 949 979 918 1251 2898
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	60 0 1010 1070 1150 1270 2060 limit/base	60 <1 926 1033 984 1182 3146 current	61 <1 953 1029 992 1199 2915 history1	59 <1 949 979 918 1251 2898 history2
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ypm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m	60 0 1010 1070 1150 1270 2060 limit/base >25	60 <1 926 1033 984 1182 3146 current 6	61 <1 953 1029 992 1199 2915 history1 4	59 <1 949 979 918 1251 2898 history2 7
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ypm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270 2060 limit/base >25	60 <1 926 1033 984 1182 3146 current 6 4	61 <1 953 1029 992 1199 2915 history1 4 2	59 <1 949 979 918 1251 2898 history2 7 2
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ypm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270 2060 limit/base >25 >20	60 <1 926 1033 984 1182 3146 <u>current</u> 6 4 6	61 <1 953 1029 992 1199 2915 history1 4 2 1	59 <1 949 979 918 1251 2898 history2 7 2 9
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ypm	ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >3	60 <1 926 1033 984 1182 3146 current 6 4 6 4 6	61 <1 953 1029 992 1199 2915 history1 4 2 1 history1	59 <1 949 979 918 1251 2898 history2 7 2 9 9
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ypm ypm ppm	ASTM D5185m ASTM D5185m	60 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >3 >20	60 <1 926 1033 984 1182 3146 <u>current</u> 6 4 6 6 2 4 6 2 0.4	61 <1 953 1029 992 1199 2915 history1 4 2 1 history1 0.2	59 <1 949 979 918 1251 2898 history2 7 2 9 9 history2 0.5
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ypm ppm p	ASTM D5185m ASTM D7844 *ASTM D7624	60 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >3 >20	60 <1 926 1033 984 1182 3146 current 6 4 6 4 6 current 0.4 7.5	61 <1 953 1029 992 1199 2915 history1 4 2 1 1 history1 0.2 6.2	59 <1 949 979 918 1251 2898 history2 7 2 9 9 history2 0.5 8.3
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRA	ppm ppm ppm ppm ppm ppm ppm ym ym ppm pp	ASTM D5185m ASTM D7844 *ASTM D7624	60 0 1010 1070 1150 2060 imit/base >25 .20 imit/base >3 >20 .30 imit/base	60 <1 926 1033 984 1182 3146 current 6 4 6 4 6 2 0.4 7.5 19.2 current	61 <1 953 1029 992 1199 2915 history1 4 2 1 1 history1 0.2 6.2 18.7 history1	59 <1 949 979 918 1251 2898 history2 7 2 9 history2 0.5 8.3 19.8 history2
	Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ypm ppm p	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7624	60 0 1010 1070 1150 1270 2060 limit/base >25 >20 limit/base >3 >20 >30	60 <1 926 1033 984 1182 3146 current 6 4 6 4 6 current 0.4 7.5 19.2	61 <1 953 1029 992 1199 2915 history1 4 2 1 history1 0.2 6.2 18.7	59 <1 949 979 918 1251 2898 history2 7 2 9 history2 0.5 8.3 19.8

Machine Id 913179

Component Diesel Engine Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination


There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.




OIL ANALYSIS REPORT





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.3	13.9
GRAPHS						

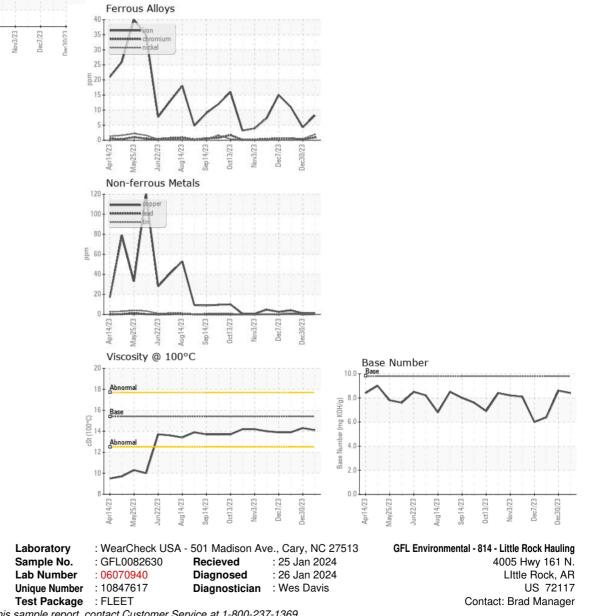



To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

Certificate L2367

Submitted By: Nicole Walls Page 2 of 2