


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

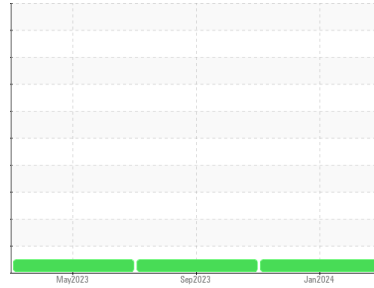

Area  
**(AU681W) Supermarket - Tractor**  
Machine Id  
**FREIGHTLINER 107A1840**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0111520</b>	PCA0104816	PCA0096008
Sample Date	Client Info			<b>09 Jan 2024</b>	14 Sep 2023	23 May 2023
Machine Age	mls	Client Info		<b>277179</b>	263768	251237
Oil Age	mls	Client Info		<b>13411</b>	12531	45035
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>10</b>	7	43
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	13	27
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>3</b>	51	117
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>8</b>	21	16
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>58</b>	17	68
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m	950	<b>884</b>	190	967
Calcium	ppm	ASTM D5185m	1050	<b>1147</b>	2281	1603
Phosphorus	ppm	ASTM D5185m	995	<b>941</b>	957	1112
Zinc	ppm	ASTM D5185m	1180	<b>1207</b>	1143	1383
Sulfur	ppm	ASTM D5185m	2600	<b>3181</b>	4356	3024

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	8
Sodium	ppm	ASTM D5185m		<b>4</b>	1	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	29	66

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.2	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.0</b>	8.3	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	22.7	21.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	15.9	18.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.6</b>	8.7	7.5





# OIL ANALYSIS REPORT

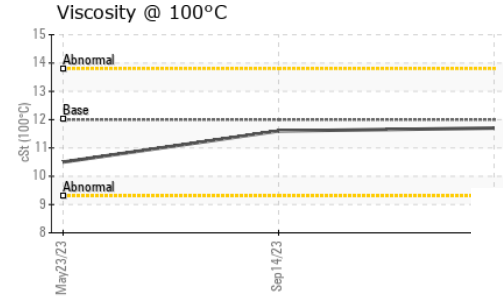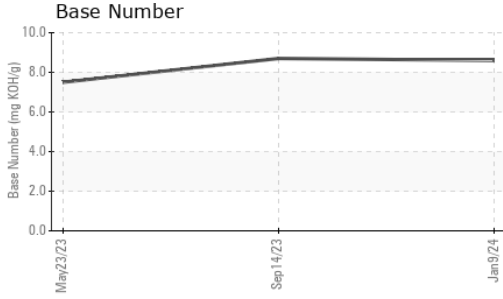

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	11.6

## GRAPHS

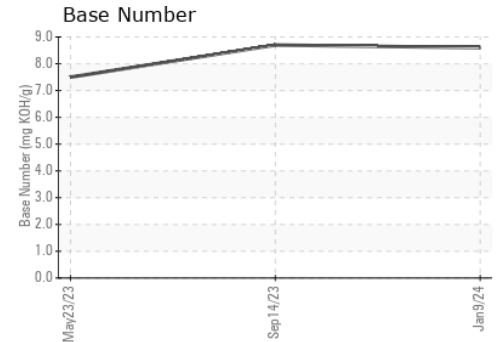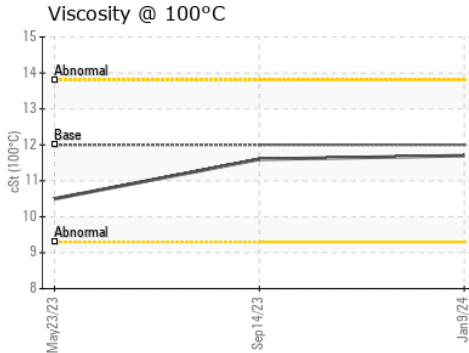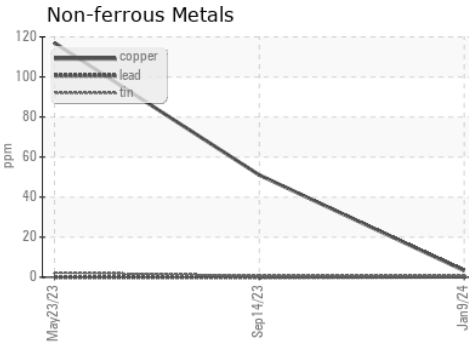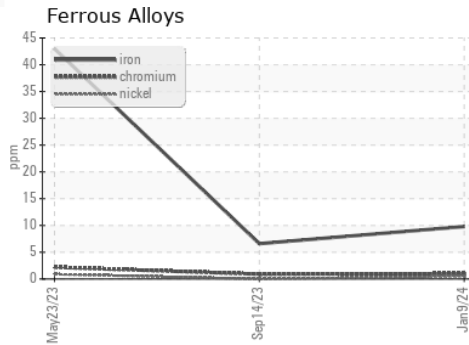

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0111520 **Received** : 25 Jan 2024  
**Lab Number** : 06071011 **Diagnosed** : 26 Jan 2024  
**Unique Number** : 10847688 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1072 - Supermarket-Elizabeth**  
 505 Division Street  
 Elizabeth, NJ  
 US 07207  
 Contact: Normand Brizak  
 nbrizak@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: