


# OIL ANALYSIS REPORT

Sample Rating Trend



**DEGRADATION**

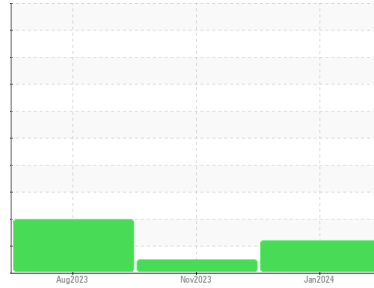

Machine Id  
**736799**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

**DIAGNOSIS**

**Recommendation**

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN level is low.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0114584</b>	PCA0112242	PCA0100798
Sample Date	Client Info		<b>19 Jan 2024</b>	11 Nov 2023	18 Aug 2023
Machine Age	mls	Client Info	<b>329483</b>	294284	249047
Oil Age	mls	Client Info	<b>0</b>	294284	249047
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>86</b>	53	▲ 123
Chromium	ppm	ASTM D5185m >20	<b>3</b>	2	5
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>1</b>	<1	3
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>9</b>	6	18
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>11</b>	13	19
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0



ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	1	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 50	<b>63</b>	64	64
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m 950	<b>946</b>	909	1018
Calcium	ppm	ASTM D5185m 1050	<b>1309</b>	1238	1355
Phosphorus	ppm	ASTM D5185m 995	<b>1046</b>	1003	1113
Zinc	ppm	ASTM D5185m 1180	<b>1289</b>	1274	1420
Sulfur	ppm	ASTM D5185m 2600	<b>2158</b>	3298	2941

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	8	8
Sodium	ppm	ASTM D5185m	<b>3</b>	0	3
Potassium	ppm	ASTM D5185m >20	<b>13</b>	12	28

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.8</b>	1.1	1.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>17.1</b>	11.8	17.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>30.3</b>	24.6	31.9

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>33.1</b>	23.7	35.4
Base Number (BN)	mg KOH/g	ASTM D2896	▲ <b>2.9</b>	4.9	▲ 2.8









# OIL ANALYSIS REPORT

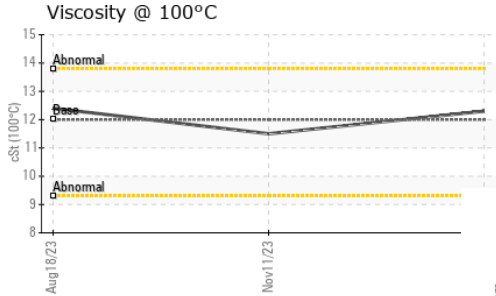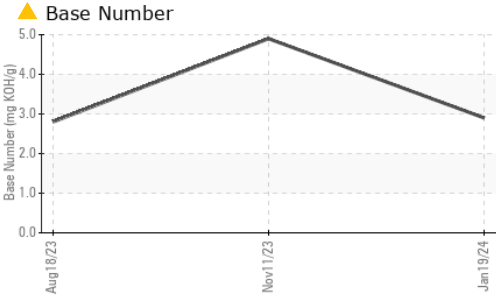

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.3	11.5

## GRAPHS

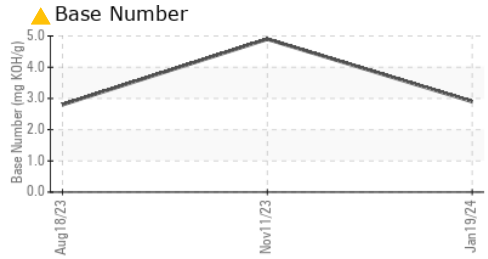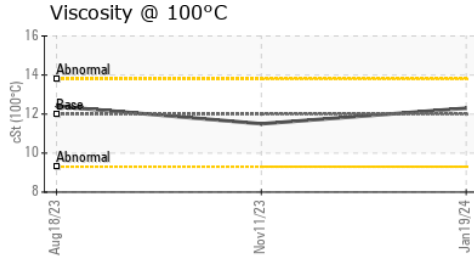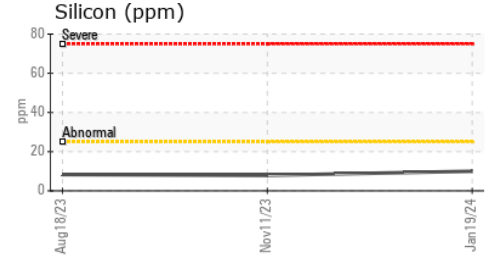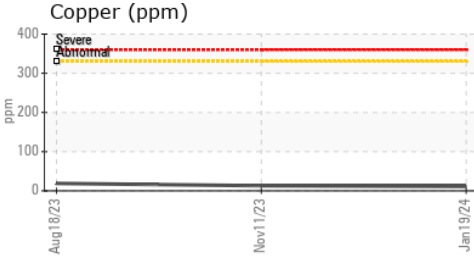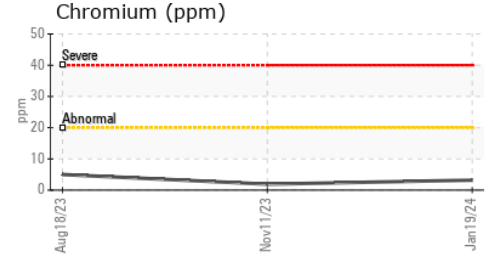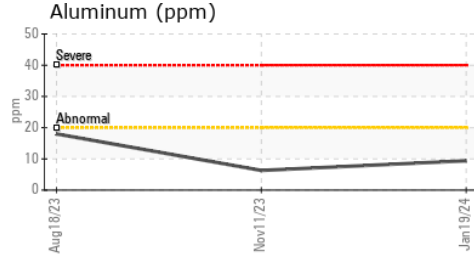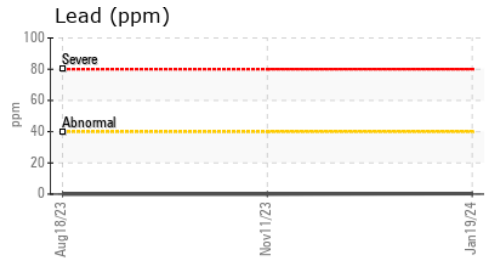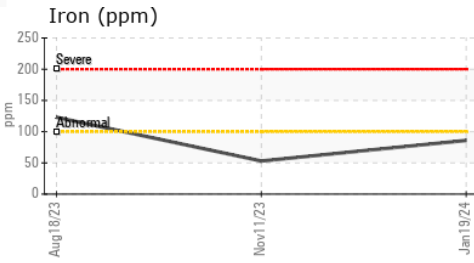

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114584 **Recieved** : 26 Jan 2024  
**Lab Number** : 06071376 **Diagnosed** : 30 Jan 2024  
**Unique Number** : 10848053 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: ROSTY VITER  
 rviter@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)