




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

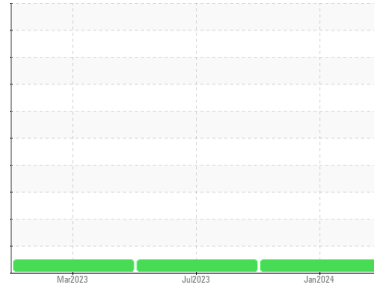

Area  
**(ML7046)**  
 Machine Id  
**413073**

Component  
**Diesel Engine**  
 Fluid

**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0090126</b>	GFL0061879	GFL0061870
Sample Date	Client Info	<b>25 Jan 2024</b>	31 Jul 2023	31 Mar 2023
Machine Age	hrs	<b>3138</b>	1937	943
Oil Age	hrs	<b>3138</b>	1937	943
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	0.4
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>13</b>	25	64
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>11</b>	38	83
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>2</b>	22	19
Tin	ppm ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	3	17
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	56	21
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	3
Magnesium	ppm ASTM D5185m 1010	<b>947</b>	922	880
Calcium	ppm ASTM D5185m 1070	<b>1077</b>	1155	1472
Phosphorus	ppm ASTM D5185m 1150	<b>1018</b>	897	866
Zinc	ppm ASTM D5185m 1270	<b>1211</b>	1184	1046
Sulfur	ppm ASTM D5185m 2060	<b>2524</b>	3245	4185

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	8
Sodium	ppm ASTM D5185m	<b>2</b>	2	4
Potassium	ppm ASTM D5185m >20	<b>21</b>	95	215

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>9.9</b>	10.5	11.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.6</b>	21.4	25.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.9</b>	17.2	19.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.8</b>	5.8	5.3







# OIL ANALYSIS REPORT

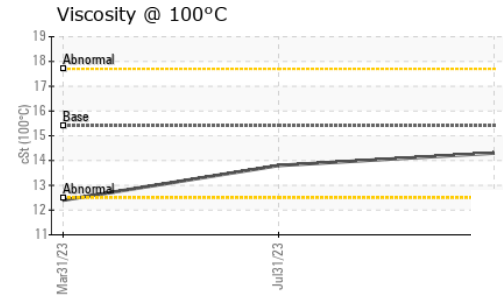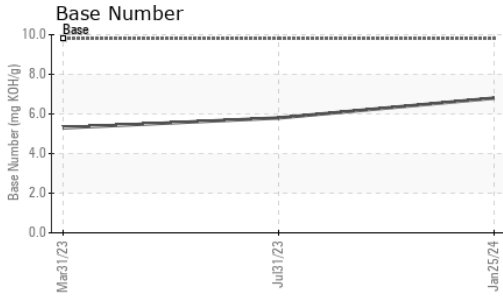

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.3</b>	13.8	12.4

## GRAPHS

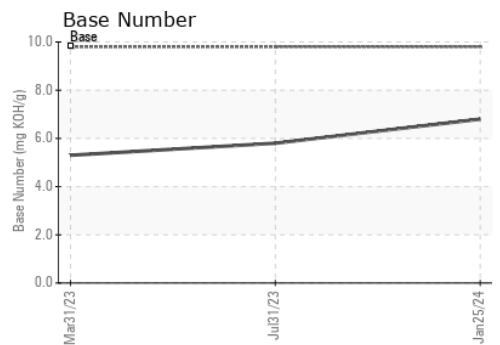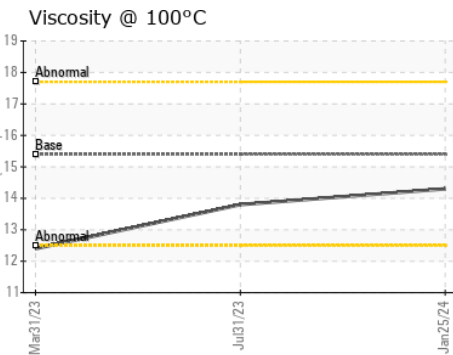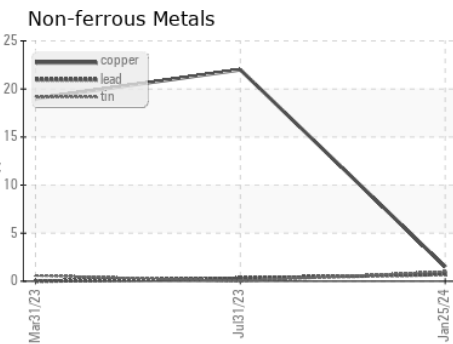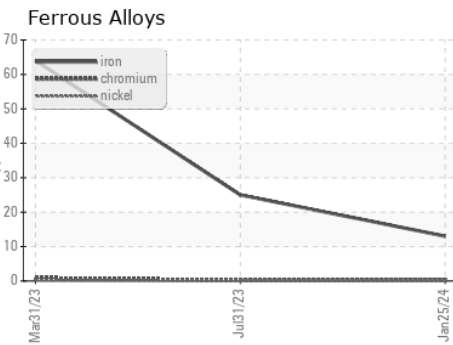

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090126 **Received** : 26 Jan 2024  
**Lab Number** : 06071466 **Diagnosed** : 26 Jan 2024  
**Unique Number** : 10848143 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 044 - Elizabeth City**  
 657 Old US 17  
 Elizabeth City, NC  
 US 27909  
 Contact: TOM BAIRD  
 tom.baird@gflenv.com  
 T: (252)562-2645  
 F: (252)264-4411

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)