




# PROBLEM SUMMARY

Sample Rating Trend




SOOT



Area  
**(YA139869)**  
Machine Id  
**2551**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

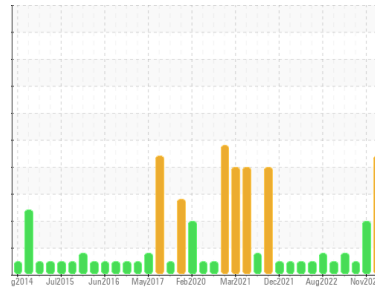

## COMPONENT CONDITION SUMMARY

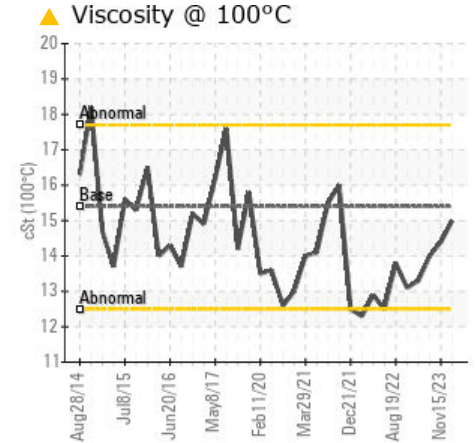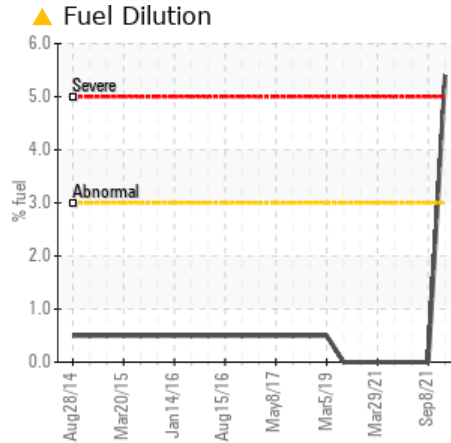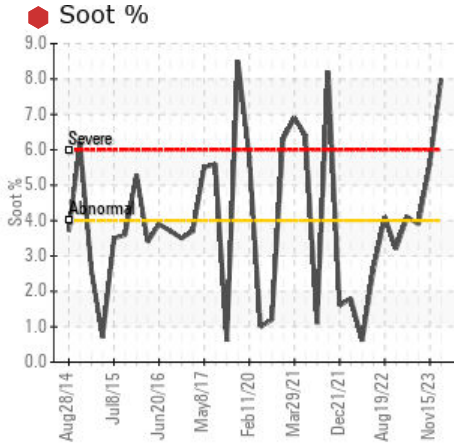

## RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	NORMAL
Fuel	%	ASTM D3524	>3.0	▲ 5.4	<1.0	<1.0
Soot %	%	*ASTM D7844	>4	● 8	▲ 5.6	3.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 0.0	▲ 0.0	3.8
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 15.0	14.4	14.0

Customer Id: GFL018  
Sample No.: GFL0089982  
Lab Number: 06071493  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

### 15 Nov 2023 Diag: Don Baldrige

#### DEGRADATION



We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value. All component wear rates are normal. There is an abnormal amount of solids and carbon present in the oil. The BN level is low.

[view report](#)



### 04 Jul 2023 Diag: Wes Davis

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 07 Apr 2023 Diag: Wes Davis

#### SOOT



The oil change at the time of sampling has been noted. All component wear rates are normal. Light concentration of carbon/soot present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

SOOT




Area  
**(YA139869)**

Machine Id  
**2551**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

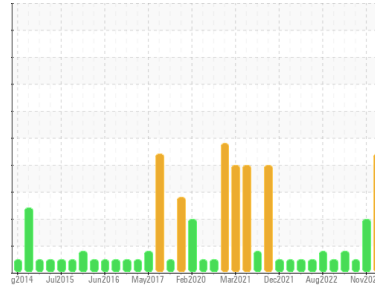

## DIAGNOSIS

### Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

### Wear

All component wear rates are normal.

### Contamination

There is an abnormal amount of solids and carbon present in the oil. There is a moderate amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN level is low.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0089982</b>	GFL0080603	GFL0066867
Sample Date	Client Info		<b>23 Jan 2024</b>	15 Nov 2023	04 Jul 2023
Machine Age	mls	Client Info	<b>946555</b>	946556	589392
Oil Age	mls	Client Info	<b>589392</b>	0	589392
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>SEVERE</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>55</b>	40	37
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	<1
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	3
Copper	ppm	ASTM D5185m >330	<b>1</b>	1	3
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	6	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	56	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>913</b>	862	943
Calcium	ppm	ASTM D5185m 1070	<b>1005</b>	1089	1083
Phosphorus	ppm	ASTM D5185m 1150	<b>955</b>	978	1006
Zinc	ppm	ASTM D5185m 1270	<b>1158</b>	1141	1265
Sulfur	ppm	ASTM D5185m 2060	<b>2685</b>	2733	3440

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	7	4
Sodium	ppm	ASTM D5185m	<b>5</b>	6	6
Potassium	ppm	ASTM D5185m >20	<b>32</b>	29	3
Fuel	%	ASTM D3524 >3.0	<b>▲ 5.4</b>	<1.0	<1.0

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>● 8</b>	▲ 5.6	3.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>31.1</b>	13.8	11.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>46.9</b>	30.8	27.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>64.5</b>	21.5	19.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>▲ 0.0</b>	▲ 0.0	3.8







# OIL ANALYSIS REPORT

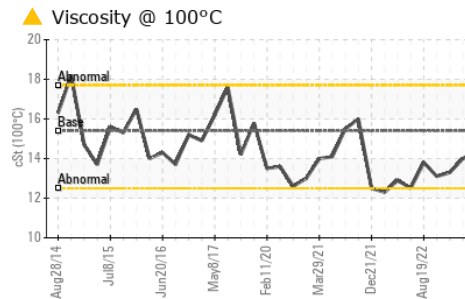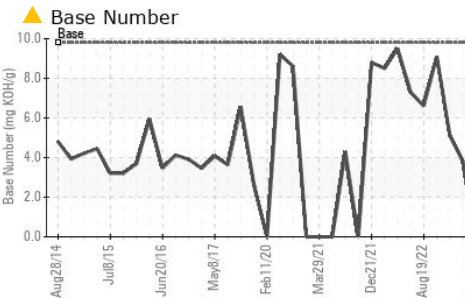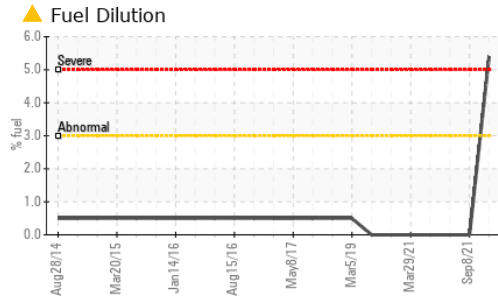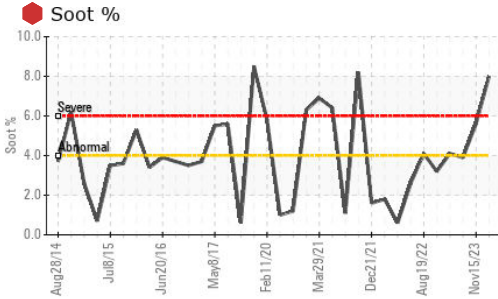

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 15.0	14.4

## GRAPHS

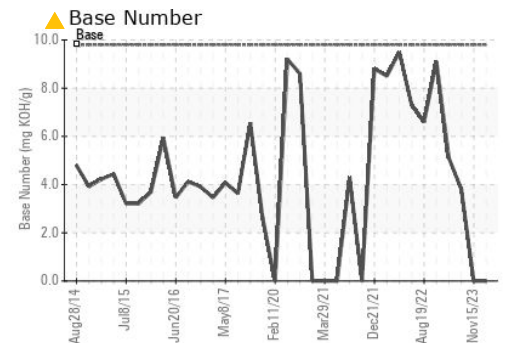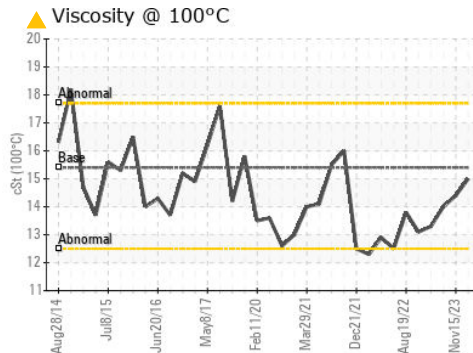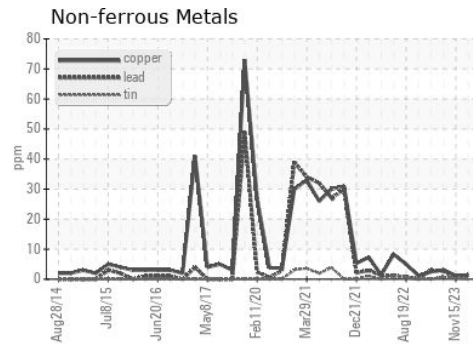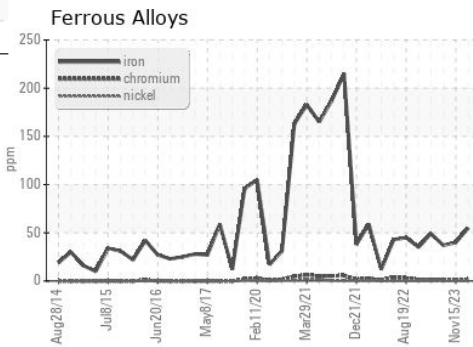

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0089982 **Received** : 26 Jan 2024  
**Lab Number** : 06071493 **Diagnosed** : 30 Jan 2024  
**Unique Number** : 10848170 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 018 - Fayetteville**  
 4621 Marracco Drive  
 Hope Mills, NC  
 US 28348  
 Contact: Robert Carter  
 robert.carter@gflenv.com  
 T: (910)596-1170  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)