

# **OIL ANALYSIS REPORT**

#### Sample Rating Trend

### NORMAL

# 



I SHP 15W40 (10	U GAL)		p2017 Jun2016 MwzO19 Jan2020 Now2020 Oct2021 MwyZ022 Apr2023					
	SAMPLE INFOF	MATION	method	limit/base	current	history1	history2	
	Sample Number		Client Info		GFL0094769	GFL0094735	GFL0089320	
interval to monitor.	Sample Date		Client Info		25 Jan 2024	14 Oct 2023	03 Aug 2023	
	Machine Age	hrs	Client Info		23481	22812	22285	
mal.	Oil Age	hrs	Client Info		0	1105	578	
	Oil Changed		Client Info		Not Changd	N/A	Not Changd	
ntamination in the	Sample Status				NORMAL	NORMAL	NORMAL	
	CONTAMINA	ΓION	method	limit/base	current	history1	history2	
ia avitabla	Fuel		WC Method	>3.0	<1.0	<1.0	<1.0	
ere is suitable he condition of the	Water		WC Method	>0.2	NEG	NEG	NEG	
	Glycol		WC Method		NEG	NEG	NEG	
	WEAR METAI	S	method	limit/base	current	history1	history2	
	Iron	ppm	ASTM D5185m	>165	47	58	48	
	Chromium	ppm	ASTM D5185m	>5	2	1	2	
	Nickel	ppm	ASTM D5185m	>4	0	0	0	
	Titanium	ppm	ASTM D5185m	>2	0	<1	<1	
	Silver	ppm	ASTM D5185m	>2	0	0	0	
	Aluminum	ppm	ASTM D5185m	>20	3	4	5	
	Lead	ppm	ASTM D5185m	>150	4	2	2	
	Copper	ppm	ASTM D5185m	>90	<1	<1	1	
	Tin	ppm	ASTM D5185m	>5	0	<1	0	
	Vanadium	ppm	ASTM D5185m		0	0	<1	
	Cadmium	ppm	ASTM D5185m		0	0	0	
	ADDITIVES		method	limit/base	current	history1	history2	
	Boron	ppm	ASTM D5185m	0	<1	3	2	
	Barium	ppm	ASTM D5185m	0	0	0	0	
	Molybdenum	ppm	ASTM D5185m	60	62	59	61	
	Manganese	ppm	ASTM D5185m	0	<1	0	<1	
	Magnesium	ppm	ASTM D5185m	1010	1019	857	967	
	Calcium	ppm	ASTM D5185m	1070	1116	982	1151	
	Phosphorus	ppm	ASTM D5185m	1150	1096	949	1029	
	Zinc	ppm	ASTM D5185m	1270	1279	1121	1303	
	Sulfur	ppm	ASTM D5185m	2060	3050	2828	3547	
	CONTAMINA	NTS	method	limit/base	current	history1	history2	
	Silicon	ppm	ASTM D5185m	>35	15	19	19	
	Sodium	ppm	ASTM D5185m		4	2	6	
	Potassium	ppm	ASTM D5185m	>20	1	3	6	
	INFRA-RED		method	limit/base	current	history1	history2	
	Soot %	%	*ASTM D7844	>7.5	1.5	1.3	1.4	
	Nitration	Abs/cm	*ASTM D7624	>20	11.7	10.5	11.2	
	Sulfation	Abs/.1mm	*ASTM D7415	>30	23.5	22.0	22.9	
	FLUID DEGRA	DATION	method	limit/base	current	history1	history2	
	Oxidation	Abs/.1mm	*ASTM D7414	>25	18.9	17.1	17.9	

## 2565 PETERBILT 567 Component

**Diesel Engine** 

#### Fluic PETRO CANADA DURON SHP 15W40 (10 GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service

#### Wear

All component wear rates are

#### Contamination

There is no indication of any oil.


#### Fluid Condition

The BN result indicates that t alkalinity remaining in the oil. oil is suitable for further service




# **OIL ANALYSIS REPORT**

Base Number

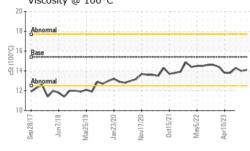

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.0	14.3
GRAPHS						
Ferrous Alloys						

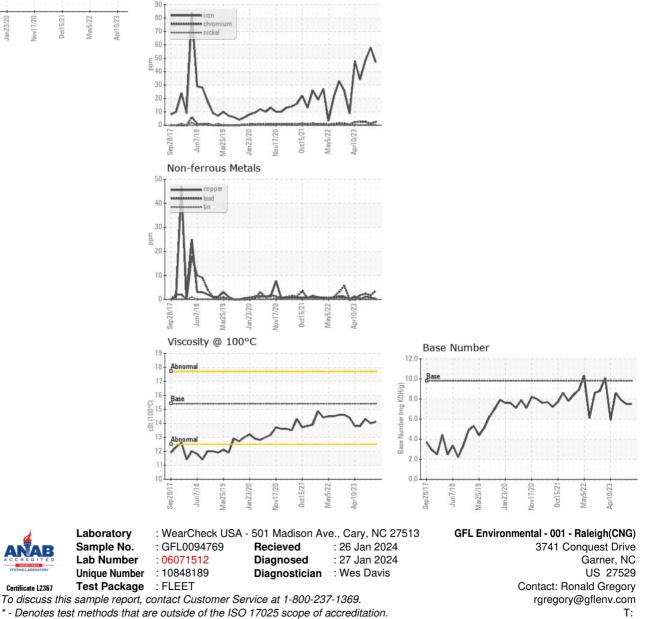

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Craig Johnson Page 2 of 2

F: (919)662-1730