


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

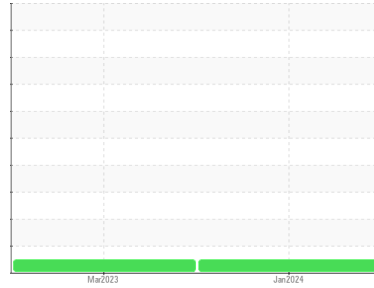

Machine Id  
**749**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105133</b>	PCA0054262	---
Sample Date	Client Info		<b>24 Jan 2024</b>	06 Mar 2023	---
Machine Age	mls	Client Info	<b>517526</b>	491755	---
Oil Age	mls	Client Info	<b>25771</b>	11230	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>11</b>	10	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>3</b>	5	---
Copper	ppm	ASTM D5185m >330	<b>1</b>	1	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>5</b>	5	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>66</b>	59	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>1041</b>	951	---
Calcium	ppm	ASTM D5185m	<b>1239</b>	1205	---
Phosphorus	ppm	ASTM D5185m	<b>1200</b>	1061	---
Zinc	ppm	ASTM D5185m	<b>1358</b>	1267	---
Sulfur	ppm	ASTM D5185m	<b>3499</b>	2881	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>11</b>	8	---
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	3	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.1</b>	9.9	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.9</b>	23.0	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.4</b>	21.1	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.67</b>	9.81	---









# OIL ANALYSIS REPORT

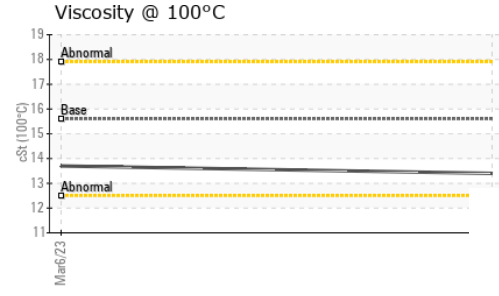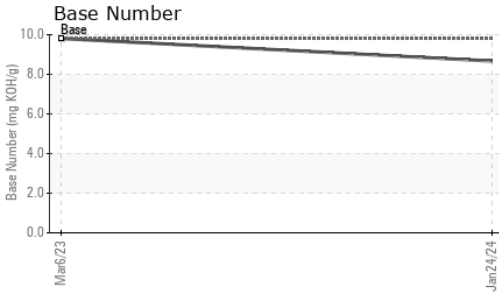

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	13.7	---

## GRAPHS

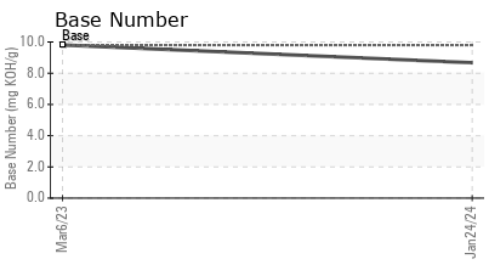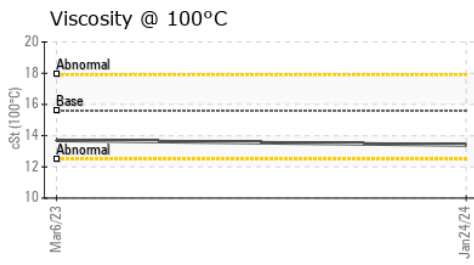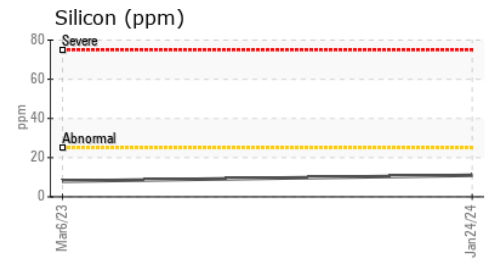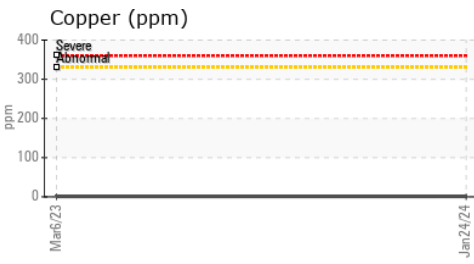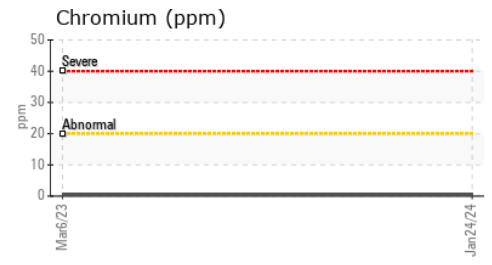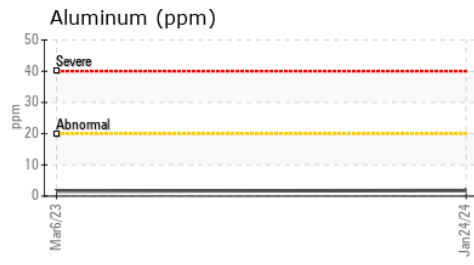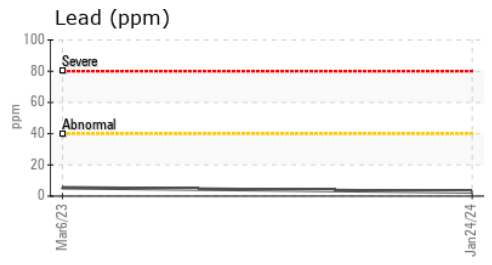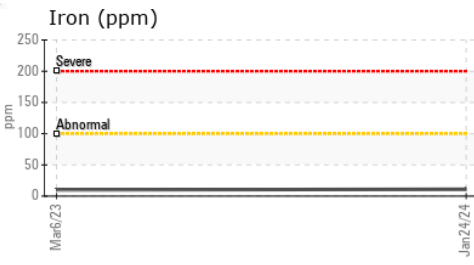

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105133 **Recieved** : 26 Jan 2024  
**Lab Number** : **06072302** **Diagnosed** : 29 Jan 2024  
**Unique Number** : 10848979 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**CENTRAL VALLEY AG**  
 5707 LANGWORTH  
 OAKDALE, CA  
 US 95361  
 Contact: S MCHENRY  
 smchenry@cv-ag.com  
 T: (209)630-8094  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)