

# **OIL ANALYSIS REPORT**

#### Sample Rating Trend



## Machine Id 413108

Component Diesel Engine

# MACK 5W30 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.





SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0103269	GFL0103339	GFL0099977
Sample Date		Client Info		25 Jan 2024	05 Jan 2024	07 Dec 2023
Machine Age	hrs	Client Info		3529	3371	3197
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ATTENTION
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	11	5	46
Chromium	ppm	ASTM D5185m	>5	<1	<1	2
Nickel	ppm	ASTM D5185m	>2	5	2	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	7	5	2
Lead	ppm	ASTM D5185m	>30	0	0	4
Copper	ppm	ASTM D5185m	>150	14	3	2
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	nnm	ASTM D5185m		•	0	0
Gaumum	ppm	ASTIVI DOTODITI		0	0	0
ADDITIVES	ppin	method	limit/base	current	0 history1	history2
	ppm		limit/base	-		-
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 50	history1 53	history2 3
ADDITIVES Boron Barium	ppm ppm	method ASTM D5185m ASTM D5185m	limit/base	current 50 0	history1 53 0	history2 3 0
ADDITIVES Boron Barium Molybdenum	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current 50 0 17	history1 53 0 14	history2 3 0 59
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current 50 0 17 1	history1 53 0 14 <1	history2 3 0 59 <1
ADDITIVES Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current 50 0 17 1 825	history1 53 0 14 <1 838	history2 3 0 59 <1 927
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current 50 0 17 1 825 1281	history1 53 0 14 <1 838 1213	history2 3 0 59 <1 927 1079
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current     50     0     17     1     825     1281     732	history1 53 0 14 <1 838 1213 778	history2 3 0 59 <1 927 1079 945
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	method     ASTM D5185m	limit/base	current     50     0     17     1     825     1281     732     871	history1     53     0     14     <1     838     1213     778     893	history2 3 0 59 <1 927 1079 945 1211
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current     50     0     17     1     825     1281     732     871     2342	history1 53 0 14 <1 838 1213 778 893 2352	history2     3     0     59     <1     927     1079     945     1211     2986
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current     50     0     17     1     825     1281     732     871     2342     current	history1 53 0 14 <1 838 1213 778 893 2352 history1	history2   3   0   59   <1   927   1079   945   1211   2986   history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method     ASTM D5185m	limit/base	current     50     0     17     1     825     1281     732     871     2342     current     4	history1   53   0   14   <1   838   1213   778   893   2352   history1   3	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method     ASTM D5185m	limit/base	current     50     0     17     1     825     1281     732     871     2342     current     4     4	history1   53   0   14   <1   838   1213   778   893   2352   history1   3   <1	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5   10
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method     ASTM D5185m	limit/base >20	current     50     0     17     1     825     1281     732     871     2342     current     4     4     6	history1   53   0   14   <1   838   1213   778   893   2352   history1   3   <1   5	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5   10   0
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm <b>TS</b> ppm ppm	method     ASTM D5185m	limit/base >20 >20 limit/base	current     50     0     17     1     825     1281     732     871     2342     current     4     6     current	history1   53   0   14   <1   838   1213   778   893   2352   history1   3   <1   5   history1	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5   10   0   history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm <b>TS</b> ppm ppm	method     ASTM D5185m	limit/base >20 >20 limit/base >3	current     50     0     17     1     825     1281     732     871     2342     current     4     6     current     0.3	history1   53   0   14   <1   838   1213   778   893   2352   history1   3   <1   5   history1   0.2	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5   10   0   history2   2.1
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method     ASTM D5185m	limit/base >20 >20 limit/base >3 >20	current     50     0     17     1     825     1281     732     871     2342     current     4     6     current     0.3     10.2	history1   53   0   14   <1   838   1213   778   893   2352   history1   3   <1   5   history1   0.2   9.0	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5   10   0   history2   2   10.6
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method     ASTM D5185m     ASTM D5185m	limit/base >20 >20 limit/base >3 >20 >30 limit/base	current     50     0     17     1     825     1281     732     871     2342     current     4     6     current     0.3     10.2     22.1	history1   53   0   14   <1   838   1213   778   893   2352   history1   3   <1   5   history1   0.2   9.0   21.9	history2   3   0   59   <1   927   1079   945   1211   2986   history2   5   10   0   history2   2.1   10.6   23.5

Contact/Location: See also GFL823, 834, 837, 840 - Robert Hart - GFL836




# **OIL ANALYSIS REPORT**





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	ERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445		11.6	11.6	<b>1</b> 4.6
GRAPHS						
Ferrous Alloys						

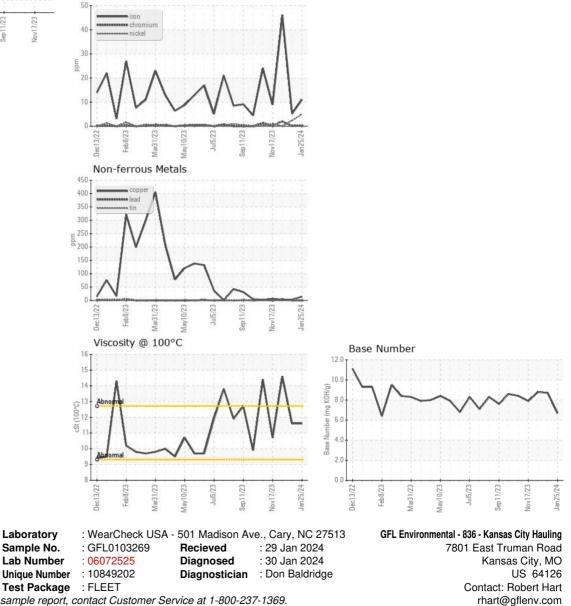

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F:

T: (580)461-1509