



OIL ANALYSIS REPORT


Sample Rating Trend

DEGRADATION

Machine Id
733020

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- QTS)

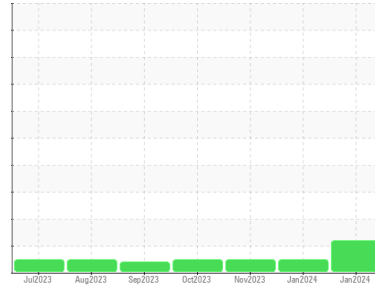

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0103282	GFL0103279	GFL0095168	
Sample Date	Client Info	24 Jan 2024	02 Jan 2024	08 Nov 2023	
Machine Age	hrs	Client Info	1207	1095	775
Oil Age	hrs	Client Info	1207	0	0
Oil Changed	Client Info	Changed	Not Changd	Not Changd	
Sample Status		ABNORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	56	9	44
Chromium	ppm	ASTM D5185m	>4	3	<1	2
Nickel	ppm	ASTM D5185m	>2	2	<1	2
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>9	54	1	36
Lead	ppm	ASTM D5185m	>30	3	2	2
Copper	ppm	ASTM D5185m	>35	16	1	17
Tin	ppm	ASTM D5185m	>4	2	1	1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	12	22	11
Barium	ppm	ASTM D5185m	5	3	0	<1
Molybdenum	ppm	ASTM D5185m	50	62	54	53
Manganese	ppm	ASTM D5185m	0	12	<1	12
Magnesium	ppm	ASTM D5185m	560	808	558	790
Calcium	ppm	ASTM D5185m	1510	1391	1570	1196
Phosphorus	ppm	ASTM D5185m	780	830	831	741
Zinc	ppm	ASTM D5185m	870	1033	981	982
Sulfur	ppm	ASTM D5185m	2040	2434	2507	2378

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	22	4	27
Sodium	ppm	ASTM D5185m		8	6	5
Potassium	ppm	ASTM D5185m	>20	181	0	138

INFRA-RED





method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		0	0.3	0
Nitration	Abs/cm	*ASTM D7624	>20	12.5	7.6	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.5	19.1	24.9

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.4	15.0	22.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	3.4	7.3	3.2







OIL ANALYSIS REPORT

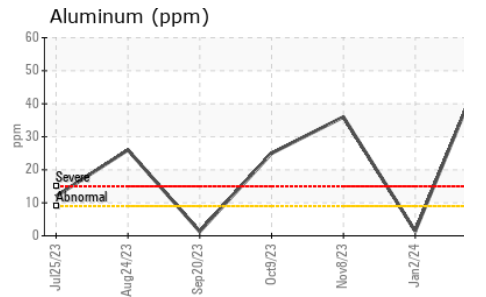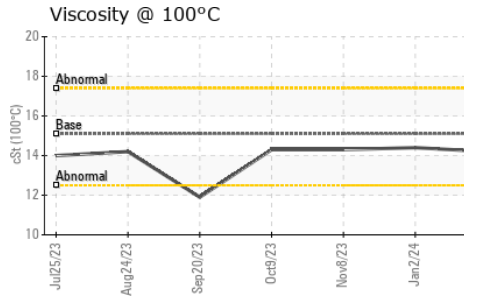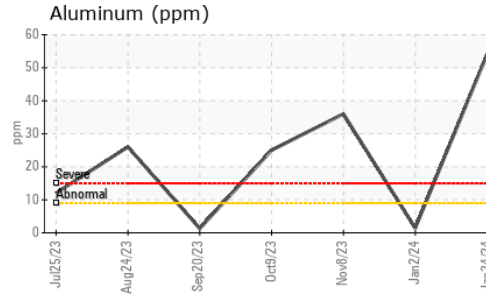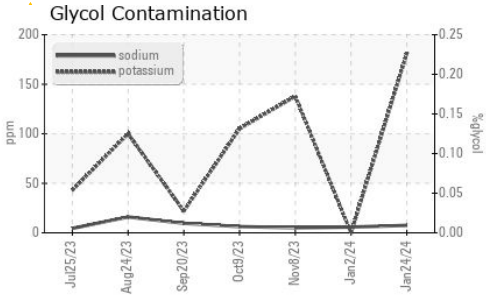

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	14.4

GRAPHS

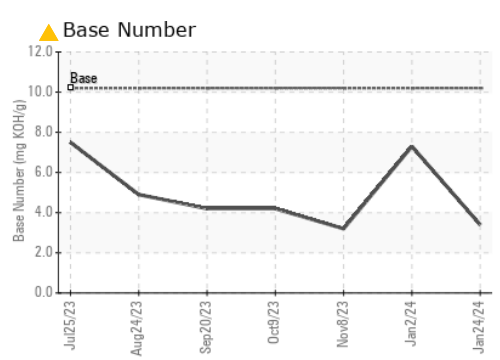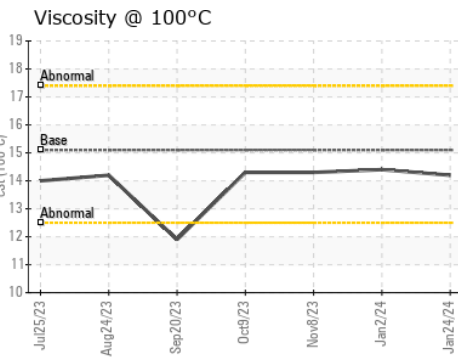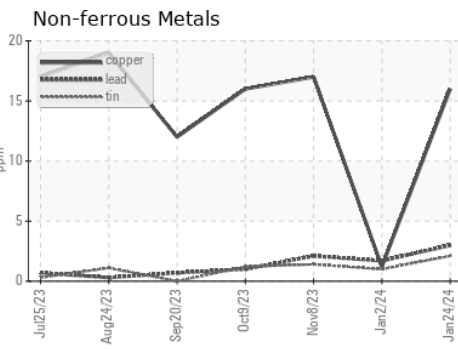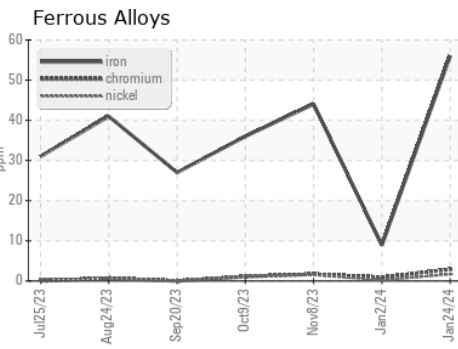

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103282 **Received** : 29 Jan 2024
Lab Number : 06072526 **Diagnosed** : 30 Jan 2024
Unique Number : 10849203 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Robert Hart
 rhart@gflenv.com
 T: (580)461-1509
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)