




# OIL ANALYSIS REPORT

Sample Rating Trend

**DEGRADATION**



Area  
**GFL035**  
 Machine Id  
**934041**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (42 QTS)**

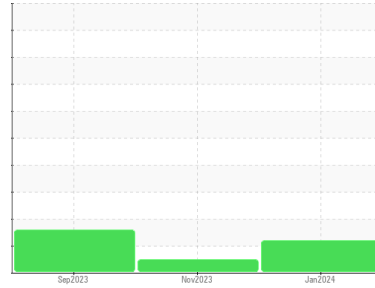

## DIAGNOSIS

### ▲ Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0085180</b>	GFL0085159	GFL0071623
Sample Date	Client Info	<b>23 Jan 2024</b>	17 Nov 2023	26 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>600</b>	300
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status		<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>29</b>	16	42
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>10</b>	4	4
Lead	ppm ASTM D5185m >40	<b>5</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>4</b>	4	17
Tin	ppm ASTM D5185m >15	<b>2</b>	<1	2
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	10	6
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	51	54
Manganese	ppm ASTM D5185m 0	<b>3</b>	2	12
Magnesium	ppm ASTM D5185m 1010	<b>643</b>	540	767
Calcium	ppm ASTM D5185m 1070	<b>1674</b>	1492	1278
Phosphorus	ppm ASTM D5185m 1150	<b>784</b>	669	662
Zinc	ppm ASTM D5185m 1270	<b>1007</b>	909	911
Sulfur	ppm ASTM D5185m 2060	<b>2321</b>	2371	2276

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>10</b>	8	▲ 30
Sodium	ppm ASTM D5185m	<b>10</b>	5	4
Potassium	ppm ASTM D5185m >20	<b>19</b>	6	10

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0</b>	0	0
Nitration	Abs/cm *ASTM D7624 >20	<b>13.0</b>	10.8	12.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>26.4</b>	20.4	22.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>22.8</b>	18.1	21.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ <b>3.0</b>	5.2	4.3







# OIL ANALYSIS REPORT

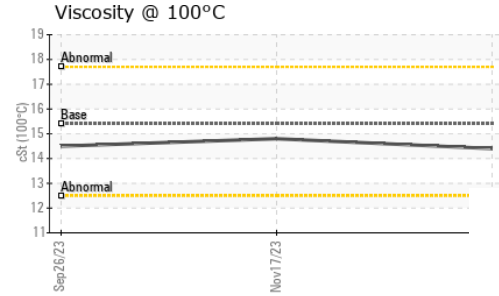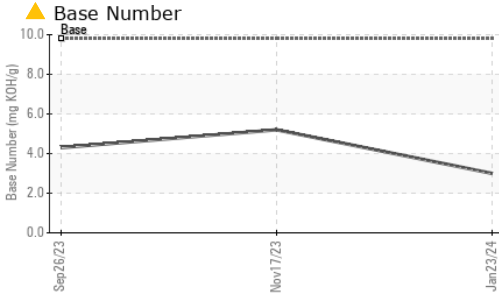

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.8	14.5

## GRAPHS

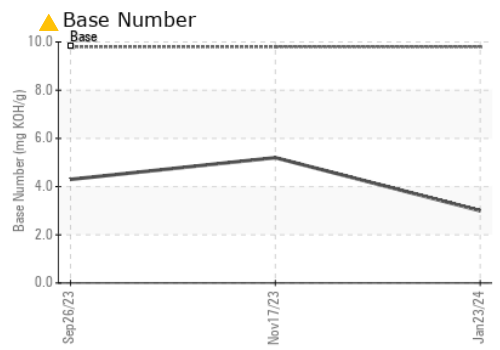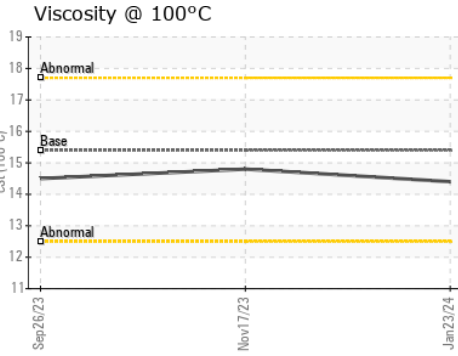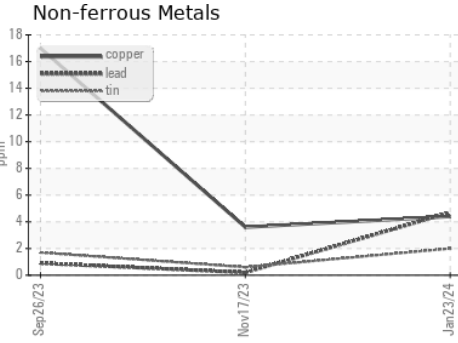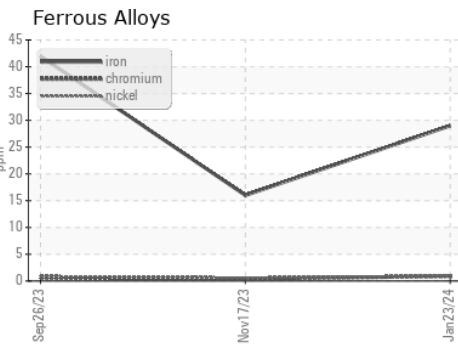

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0085180 **Received** : 29 Jan 2024  
**Lab Number** : **06072664** **Diagnosed** : 30 Jan 2024  
**Unique Number** : 10849341 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)