




# OIL ANALYSIS REPORT

Sample Rating Trend

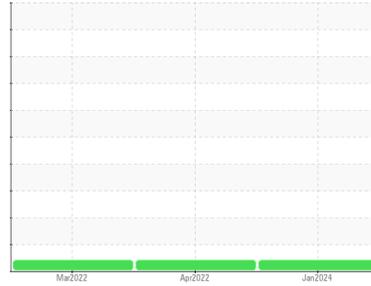

VISCOSITY



Machine Id  
**11378**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: 90 day interval. )

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0104024</b>	GFL0049271	GFL0034324
Sample Date	Client Info	<b>23 Jan 2024</b>	18 Apr 2022	06 Mar 2022
Machine Age	hrs	Client Info	<b>9455</b>	0
Oil Age	hrs	Client Info	<b>9455</b>	0
Oil Changed	Client Info	<b>Changed</b>	N/A	N/A
Sample Status		<b>ATTENTION</b>	ATTENTION	ATTENTION

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG
Glycol	WC Method		<b>NEG</b>	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	<b>14</b>	24	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	23	22
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	5	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>19</b>	21	15
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>5</b>	32	32
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>52</b>	51	52
Manganese	ppm	ASTM D5185m	0	<b>6</b>	1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>567</b>	758	758
Calcium	ppm	ASTM D5185m	1070	<b>869</b>	1063	1086
Phosphorus	ppm	ASTM D5185m	1150	<b>589</b>	649	622
Zinc	ppm	ASTM D5185m	1270	<b>703</b>	841	763
Sulfur	ppm	ASTM D5185m	2060	<b>1905</b>	2052	2011

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	10	8
Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	2
Fuel	%	ASTM D3524	>5	<b>1.1</b>	1.6	1.4

## INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.8</b>	17.5	15.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.4</b>	35.3	30.8

## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.5</b>	33.5	27.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>3.9</b>	4.5	5.4







# OIL ANALYSIS REPORT

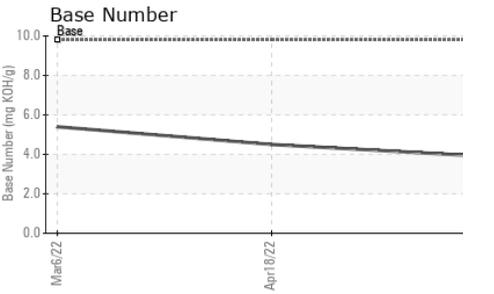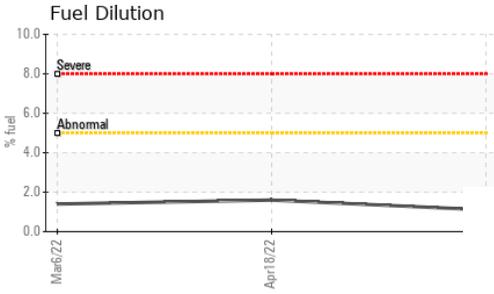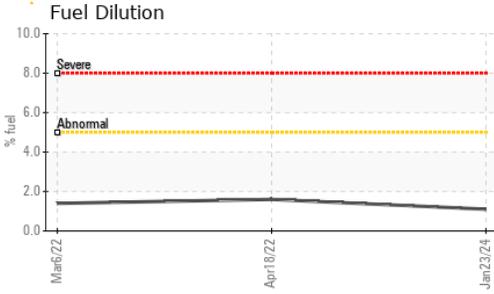

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.1	▲ 11.9

## GRAPHS

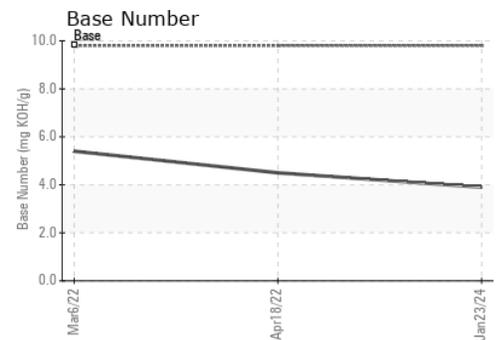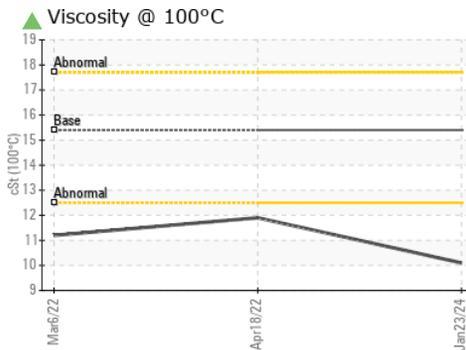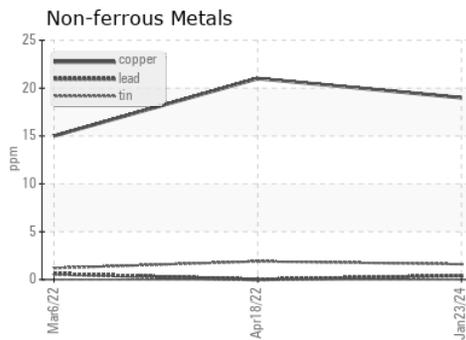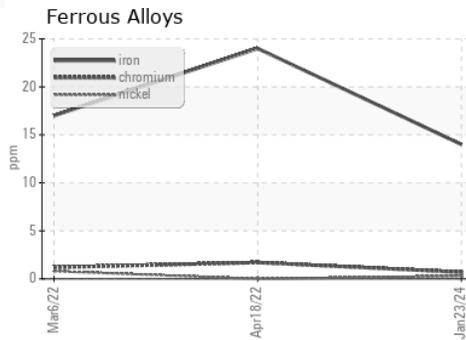

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104024 **Received** : 29 Jan 2024  
**Lab Number** : 06072667 **Diagnosed** : 31 Jan 2024  
**Unique Number** : 10849344 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 015 - Columbia**  
 7800 Farrow Road  
 Columbia, SC  
 US 29203-3219  
 Contact: NOEL MATTHEWS  
 nmatthewsjr@gflenv.com  
 T: (803)935-0249  
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)