


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

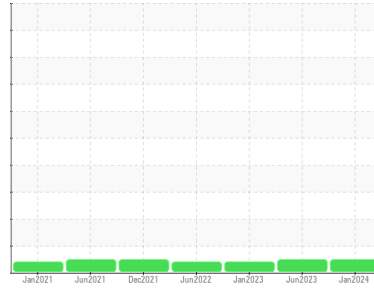

Machine Id
DT766
Component
Front Differential
Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0113212	PCA0096940	PCA0091218
Sample Date	Client Info		25 Jan 2024	30 Jun 2023	18 Jan 2023
Machine Age	mls	Client Info	179535	154392	129664
Oil Age	mls	Client Info	25143	100590	102291
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	106	276	218
Chromium	ppm	ASTM D5185m >8	<1	2	2
Nickel	ppm	ASTM D5185m >20	5	9	13
Titanium	ppm	ASTM D5185m >4	0	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >30	16	5	17
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >50	<1	<1	1
Tin	ppm	ASTM D5185m >5	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	227	218	233
Barium	ppm	ASTM D5185m	1	0	0
Molybdenum	ppm	ASTM D5185m	23	13	13
Manganese	ppm	ASTM D5185m	<1	3	3
Magnesium	ppm	ASTM D5185m	174	50	47
Calcium	ppm	ASTM D5185m	303	122	115
Phosphorus	ppm	ASTM D5185m	1195	1429	1293
Zinc	ppm	ASTM D5185m	269	81	87
Sulfur	ppm	ASTM D5185m	18803	28104	21987

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	22	84	83
Sodium	ppm	ASTM D5185m	0	5	2
Potassium	ppm	ASTM D5185m >20	<1	2	1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	LIGHT	NONE	▲ MODER
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT



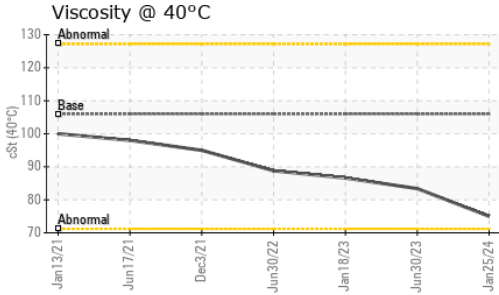


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	106	75.0	83.4	86.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

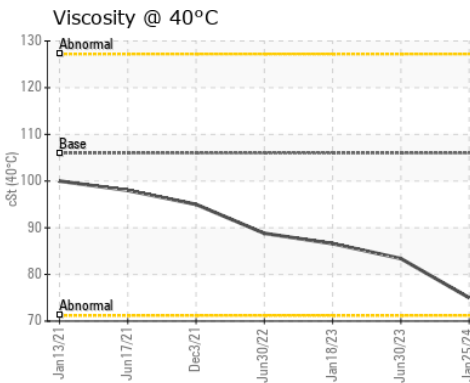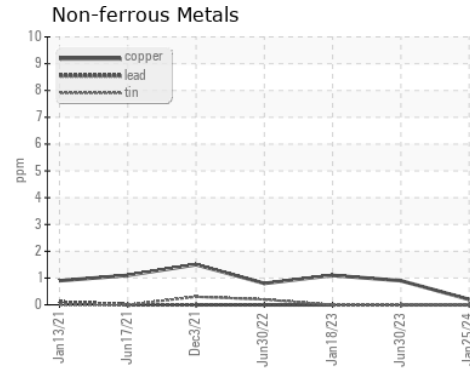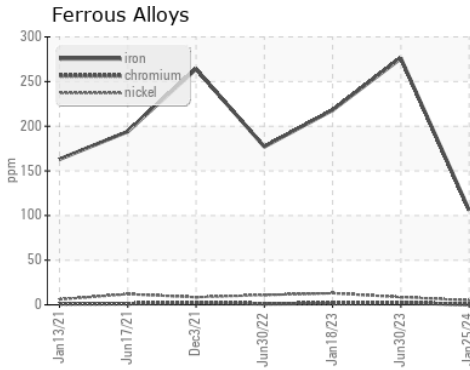

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113212 **Received** : 29 Jan 2024
Lab Number : **06073329** **Diagnosed** : 31 Jan 2024
Unique Number : 10850006 **Diagnostician** : Sean Felton
Test Package : FLEET

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)