




OIL ANALYSIS REPORT

Sample Rating Trend

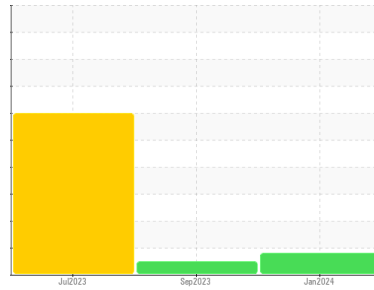

WEAR



Machine Id
913119
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (28 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0096893	GFL0091724	GFL0083999
Sample Date	Client Info		11 Jan 2024	11 Sep 2023	28 Jul 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	600	0	600
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	NORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	0.4
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	22	12	49
Chromium	ppm	ASTM D5185m >20	1	<1	1
Nickel	ppm	ASTM D5185m >5	▲ 8	2	▲ 10
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	<1	<1	2
Aluminum	ppm	ASTM D5185m >20	2	2	4
Lead	ppm	ASTM D5185m >40	<1	<1	<1
Copper	ppm	ASTM D5185m >330	16	19	113
Tin	ppm	ASTM D5185m >15	1	<1	3
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	16	197
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	60	66	122
Manganese	ppm	ASTM D5185m 0	<1	1	5
Magnesium	ppm	ASTM D5185m 1010	916	1016	661
Calcium	ppm	ASTM D5185m 1070	1086	1206	1454
Phosphorus	ppm	ASTM D5185m 1150	890	1019	726
Zinc	ppm	ASTM D5185m 1270	1185	1286	893
Sulfur	ppm	ASTM D5185m 2060	2939	3678	2297

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	13	95
Sodium	ppm	ASTM D5185m	0	1	0
Potassium	ppm	ASTM D5185m >20	3	2	11

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.6	0.3	0.5
Nitration	Abs/cm	*ASTM D7624 >20	9.5	6.5	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.9	18.5	23.2


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.2	14.4	21.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.3	8.7	7.2




OIL ANALYSIS REPORT


▲ Ferrous Alloys

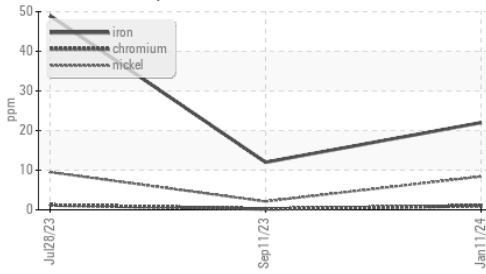

Base Number

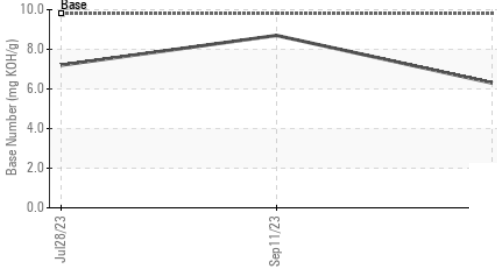

Viscosity @ 100°C

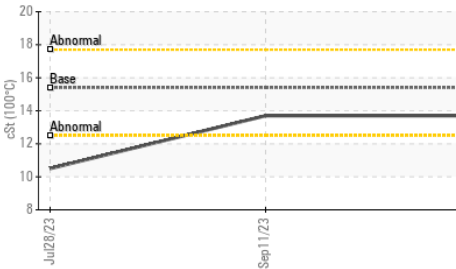


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15.4	13.7	13.7	▲ 10.5

GRAPHS


▲ Ferrous Alloys

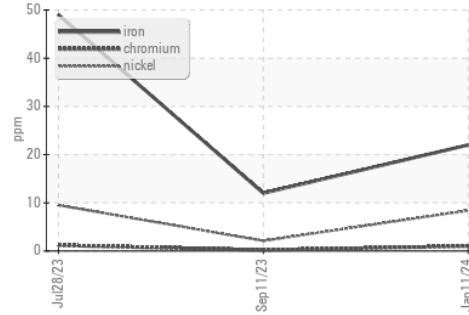


Non-ferrous Metals

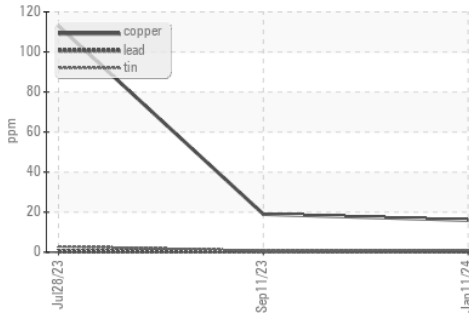

Viscosity @ 100°C

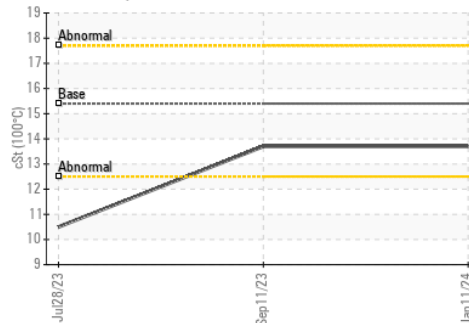

Base Number

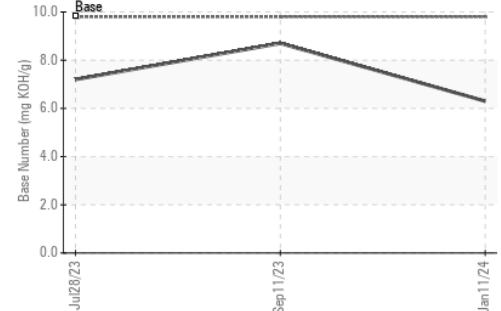

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0096893 **Received** : 30 Jan 2024
Lab Number : **06073703** **Diagnosed** : 31 Jan 2024
Unique Number : 10850380 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 401 - Fort Wayne Hauling
 4429 ALLEN MARTIN DR
 FORT WAYNE, IN
 US 46806
 Contact: Stephanie Burton
 stephanieburton@gflenv.com
 T: (260)747-5037
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)