

OIL ANALYSIS REPORT

VISCOSITY

PROCESS CHEESE [98739264] **SODIUM HYDROXIDE BAY (S/N UP900137)**

Component **Pump**

ISO 68 (1 LTR)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.


All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

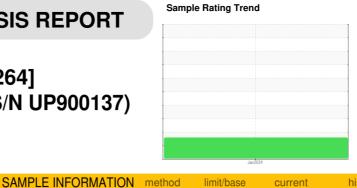


0 1 11 1		0"				
Sample Number		Client Info		PCA0114282		
Sample Date		Client Info		21 Jan 2024		
Machine Age	days	Client Info		0		
Oil Age	days	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>.1	NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	0		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>7	2		
Lead	ppm	ASTM D5185m	>12	0		
Copper	ppm	ASTM D5185m	>30	<1		
Tin	ppm	ASTM D5185m	>9	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		496		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		1386		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>1300	29838		
Particles >6µm		ASTM D7647	>320	^ 5690		
Particles >14µm		ASTM D7647	>80	41		
Particles >21µm		ASTM D7647	>20	5		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<u>^ 22/20/13</u>		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045



OIL ANALYSIS REPORT

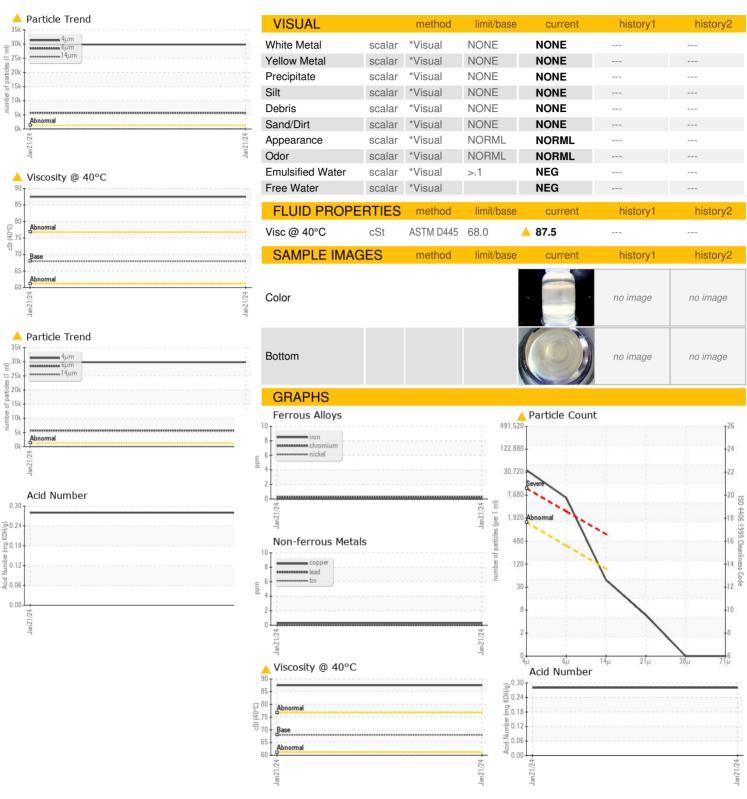





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: PCA0114282 : 06074667

: 10856758

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved : 30 Jan 2024

Diagnosed : 01 Feb 2024 : Jonathan Hester Diagnostician

Test Package : IND 2 (Additional Tests: PrtCount)

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

2035 E BENNETT SPRINGFIELD, MO US 65804

Contact: Service Manager

T: F: