




OIL ANALYSIS REPORT

Sample Rating Trend

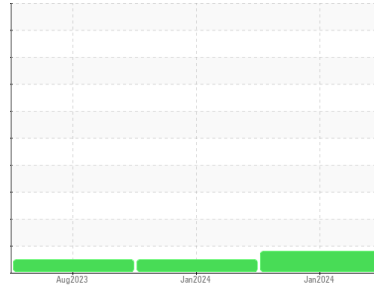

WEAR



Machine Id
933023

Component
Transmission (Auto)

Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109764	GFL0103332	GFL0087201
Sample Date	Client Info	29 Jan 2024	20 Jan 2024	15 Aug 2023
Machine Age	hrs	Client Info	2142	1201
Oil Age	hrs	Client Info	2142	1201
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >160	113	61	39
Chromium	ppm ASTM D5185m >5	<1	0	<1
Nickel	ppm ASTM D5185m >5	<1	<1	<1
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >5	0	0	0
Aluminum	ppm ASTM D5185m >50	▲ 59	32	14
Lead	ppm ASTM D5185m >50	8	26	2
Copper	ppm ASTM D5185m >225	43	10	7
Tin	ppm ASTM D5185m >10	10	7	4
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	81	86	80
Barium	ppm ASTM D5185m	1	0	0
Molybdenum	ppm ASTM D5185m	1	0	<1
Manganese	ppm ASTM D5185m	4	2	2
Magnesium	ppm ASTM D5185m	2	1	1
Calcium	ppm ASTM D5185m	58	83	63
Phosphorus	ppm ASTM D5185m	233	229	283
Zinc	ppm ASTM D5185m	4	9	0
Sulfur	ppm ASTM D5185m	1333	1139	1234

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	8	4	3
Sodium	ppm ASTM D5185m	8	8	6
Potassium	ppm ASTM D5185m >20	5	4	5

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual NONE	NONE	NONE	NONE
Precipitate	scalar *Visual NONE	NONE	NONE	NONE
Silt	scalar *Visual NONE	NONE	NONE	NONE
Debris	scalar *Visual NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar *Visual NONE	NONE	NONE	NONE
Appearance	scalar *Visual NORML	NORML	NORML	NORML
Odor	scalar *Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual >0.1	NEG	NEG	NEG
Free Water	scalar *Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

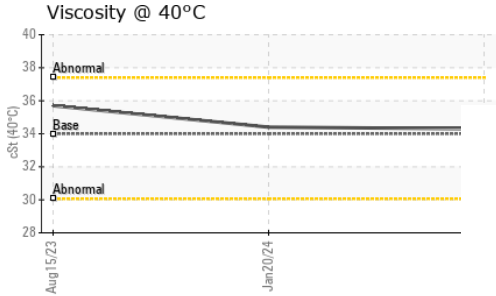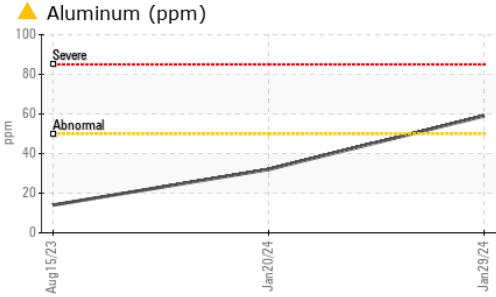




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	34.3	34.4	35.7

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

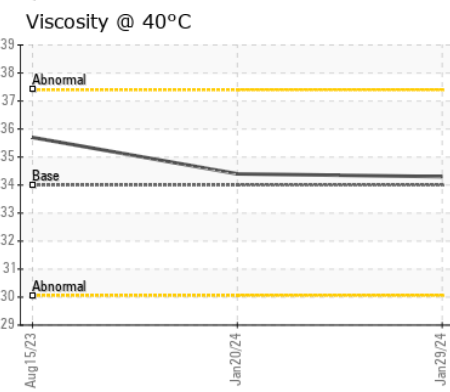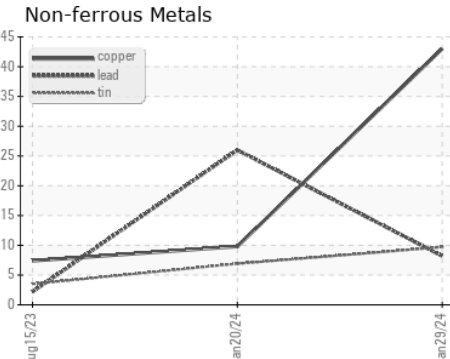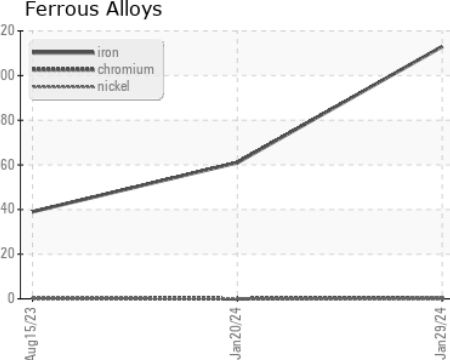

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109764 **Received** : 31 Jan 2024
Lab Number : 06076210 **Diagnosed** : 02 Feb 2024
Unique Number : 10858301 **Diagnostician** : Jonathan Hester
Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Robert Hart
 rhart@gflenv.com
 T: (580)461-1509
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)