




# OIL ANALYSIS REPORT

Sample Rating Trend

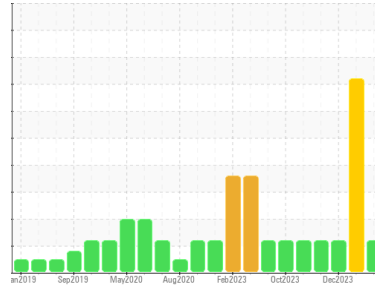

GLYCOL



Machine Id  
**723034-303005**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108143</b>	GFL0108159	GFL0102494
Sample Date	Client Info	<b>24 Jan 2024</b>	16 Jan 2024	30 Dec 2023
Machine Age	hrs	<b>22196</b>	22148	22060
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Changed
Sample Status		<b>ATTENTION</b>	SEVERE	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>15</b>	67	54
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	3	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>2</b>	8	7
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	4	4
Copper	ppm ASTM D5185m >150	<b>&lt;1</b>	4	2
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>11</b>	19	15
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	91	87
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1035</b>	1212	1243
Calcium	ppm ASTM D5185m 1070	<b>1081</b>	1314	1383
Phosphorus	ppm ASTM D5185m 1150	<b>1030</b>	1211	1422
Zinc	ppm ASTM D5185m 1270	<b>1211</b>	1596	1686
Sulfur	ppm ASTM D5185m 2060	<b>2827</b>	3027	3503

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>7</b>	20	20
Sodium	ppm ASTM D5185m	<b>▲ 170</b>	▲ 575	▲ 466
Potassium	ppm ASTM D5185m >20	<b>2</b>	<1	2
Glycol	% *ASTM D2982	<b>NEG</b>	◼ 0.10	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	1.2	0.8
Nitration	Abs/cm *ASTM D7624 >20	<b>7.6</b>	13.6	11.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.3</b>	27.3	25.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.4</b>	24.5	21.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.4</b>	9.8	8.4







# OIL ANALYSIS REPORT

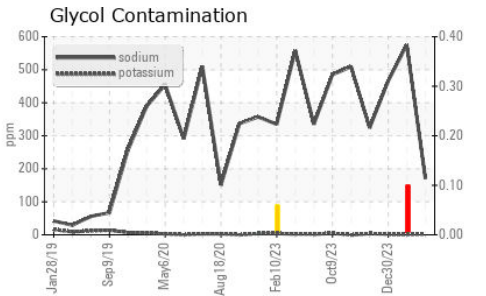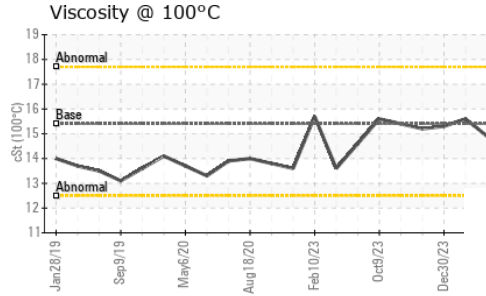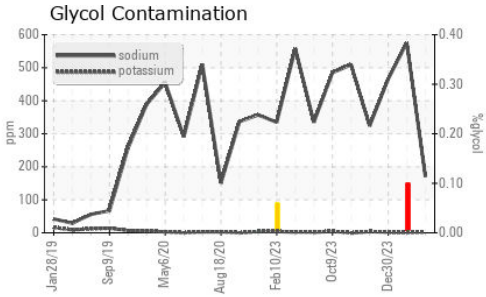

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.9	15.6

## GRAPHS

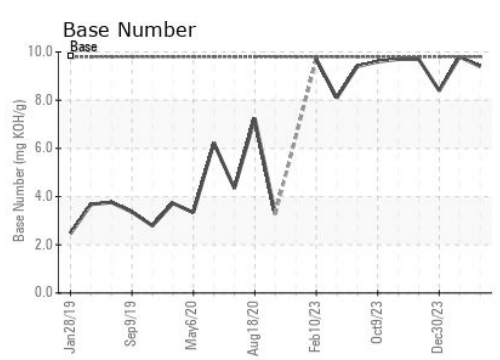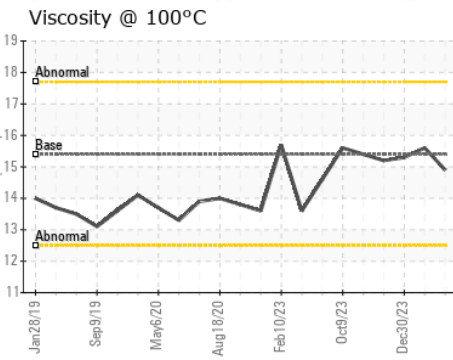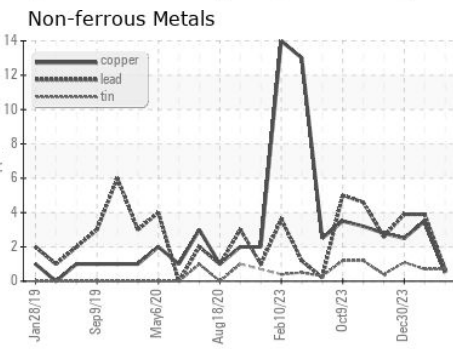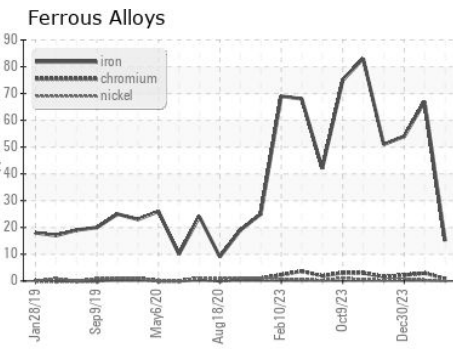

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108143 **Received** : 31 Jan 2024  
**Lab Number** : 06076328 **Diagnosed** : 05 Feb 2024  
**Unique Number** : 10858419 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: JOHNNY PEREZ  
 johnny.perez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: