




# OIL ANALYSIS REPORT

Sample Rating Trend

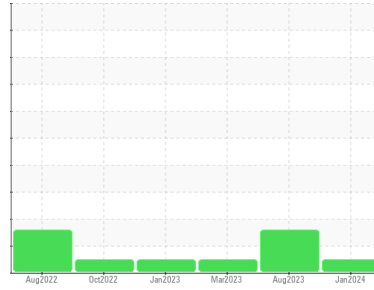

**NORMAL**



Machine Id  
**928038**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0107506</b>	GFL0064703	GFL0072494	
Sample Date	Client Info	<b>26 Jan 2024</b>	29 Aug 2023	31 Mar 2023	
Machine Age	hrs	Client Info	<b>17743</b>	16818	15732
Oil Age	hrs	Client Info	<b>604</b>	608	591
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>37</b>	16	13
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	3	<1
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>2</b>	1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>29</b>	62	14
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	68	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>892</b>	791	924
Calcium	ppm ASTM D5185m 1070	<b>1139</b>	1417	1147
Phosphorus	ppm ASTM D5185m 1150	<b>919</b>	893	973
Zinc	ppm ASTM D5185m 1270	<b>1084</b>	1130	1178
Sulfur	ppm ASTM D5185m 2060	<b>2702</b>	3360	3187

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>13</b>	▲ 38	7
Sodium	ppm ASTM D5185m	<b>4</b>	5	3
Potassium	ppm ASTM D5185m >20	<b>1</b>	<1	0

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.6	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>9.1</b>	8.3	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.2</b>	21.0	19.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.7</b>	15.2	14.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.9</b>	7.7	8.7







# OIL ANALYSIS REPORT

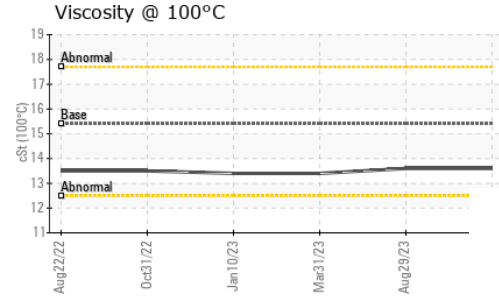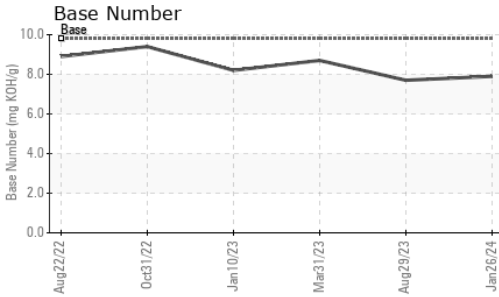

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.6	13.4

## GRAPHS

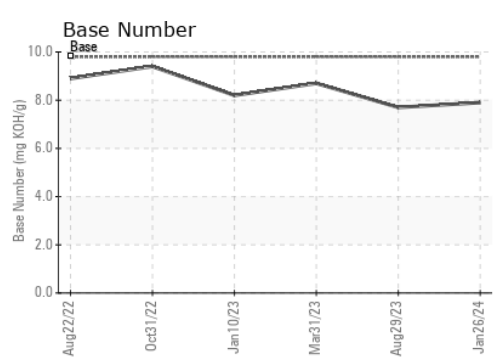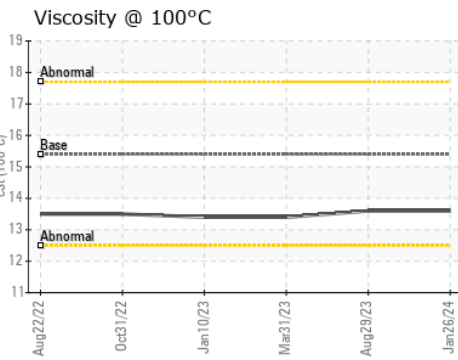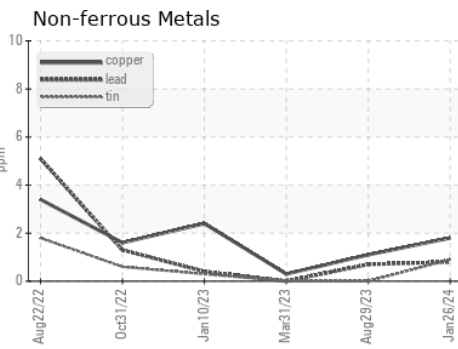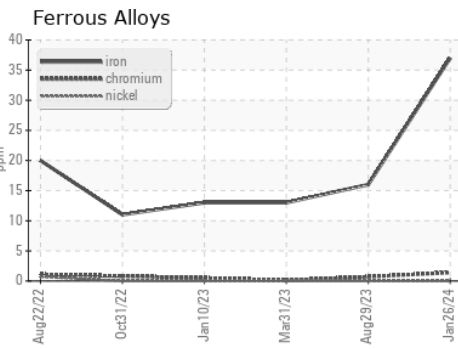

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107506 **Received** : 31 Jan 2024  
**Lab Number** : **06076342** **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10858433 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 912 - Fort Atkinson HC**  
 1215 Klement St.  
 Fort Atkinson, WI  
 US 53538  
 Contact: LEONARD KOZLEUCHAR  
 leonard.kozleuchar@gflenv.com  
 T: (262)210-6528  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)